

Document Title

256K x16 bit Low Power and Low Voltage Full CMOS Static RAM

Revision History

Revision No.	History	Draft Date	Remark
0.0	Initial Draft	October 24 , 2002	Preliminary
0.1	2'nd Draft	November 11 , 2002	Changed Icc, Icc1 value
0.2	3'rd Draft	December 23 , 2002	Changed I _{SB1} test conditions, Changed VDR & IDR measurement condition
0.3	4'th Draft	February 13 , 2004	Add Pb-free part number
0.4	5'th Draft	April 11 , 2006	EM640FP16: Changed Icc2 value Changed Package Dimension

Emerging Memory & Logic Solutions Inc.

IT Venture Tower Eastside 11F, 78, Karac-Dong, Songpa-Ku, Seoul, Rep.of Korea Zip Code : 138-160
Tel : +82-2-2142-1759~1766 Fax : +82-2-2142-1769 / Homepage : www.emlsi.com

The attached datasheets are provided by EMLSI reserve the right to change the specifications and products. EMLSI will answer to your questions about device. If you have any questions, please contact the EMLSI office.

FEATURES

- Process Technology : 0.18 μ m Full CMOS
- Organization : 256K x 16 bit
- Power Supply Voltage : 1.65V ~ 2.2V
- Low Data Retention Voltage : 1.0V(Min.)
- Three state outputs
- Package Type : 48-FPBGA 6.0x7.0

PRODUCT FAMILY

Product Family	Operating Temperature	Vcc Range	Speed	Power Dissipation		PKG Type
				Standby (I _{SB1} , Typ.)	Operating (I _{CC1} , Max)	
EM640FP16	Industrial (-40 ~ 85°C)	1.65~2.2V	70ns ¹⁾	1 μ A	2 mA	48-FPBGA (6.0x7.0)

1. The parameter is measured with 30pF test load.

PIN DESCRIPTION

	1	2	3	4	5	6
A	$\overline{\text{LB}}$	$\overline{\text{OE}}$	A ₀	A ₁	A ₂	CS ₂
B	I/O ₉	$\overline{\text{UB}}$	A ₃	A ₄	$\overline{\text{CS}}_1$	I/O ₁
C	I/O ₁₀	I/O ₁₁	A ₅	A ₆	I/O ₂	I/O ₃
D	V _{SS}	I/O ₁₂	A ₁₇	A ₇	I/O ₄	V _{CC}
E	V _{CC}	I/O ₁₃	DNU	A ₁₆	I/O ₅	V _{SS}
F	I/O ₁₅	I/O ₁₄	A ₁₄	A ₁₅	I/O ₆	I/O ₇
G	I/O ₁₆	DNU	A ₁₂	A ₁₃	$\overline{\text{WE}}$	I/O ₈
H	DNU	A ₈	A ₉	A ₁₀	A ₁₁	DNU


48-FPBGA : Top view (ball down)

Name	Function	Name	Function
$\overline{\text{CS}}_1, \text{CS}_2$	Chip select inputs	Vcc	Power Supply
$\overline{\text{OE}}$	Output Enable input	Vss	Ground
$\overline{\text{WE}}$	Write Enable input	$\overline{\text{UB}}$	Upper Byte (I/O ₉₋₁₆)
A ₀ ~A ₁₇	Address Inputs	$\overline{\text{LB}}$	Lower Byte (I/O ₁₋₈)
I/O ₁ ~I/O ₁₆	Data Inputs/outputs	DNU	Do Not Use

GENERAL DESCRIPTION

The EM640FP16 families are fabricated by EMLSI's advanced full CMOS process technology. The families support industrial temperature range and Chip Scale Package for user flexibility of system design. The families also supports low data retention voltage for battery back-up operation with low data retention current.

FUNCTIONAL BLOCK DIAGRAM

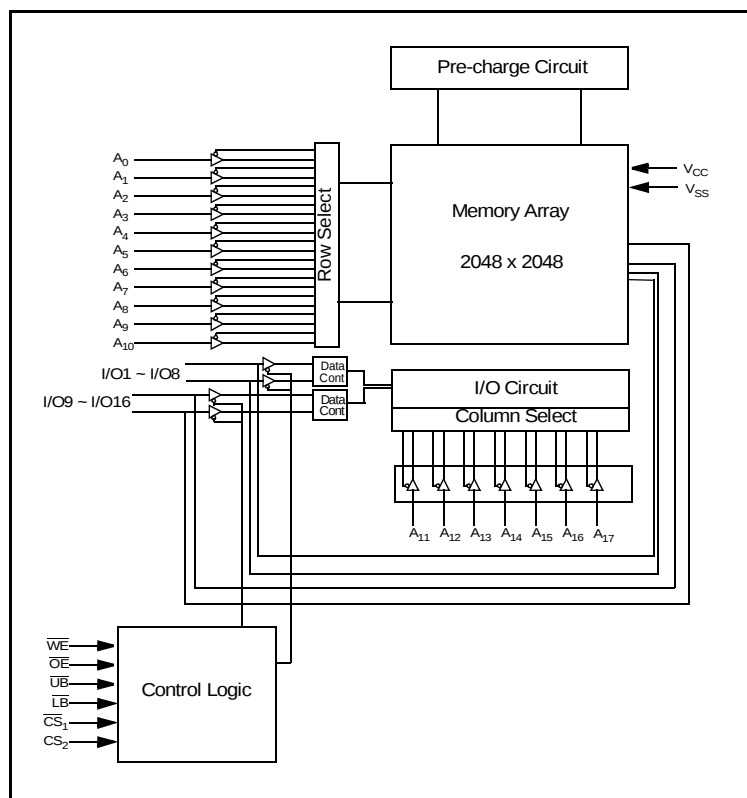

ABSOLUTE MAXIMUM RATINGS *

Parameter	Symbol	Minimum	Unit
Voltage on Any Pin Relative to Vss	V_{IN}, V_{OUT}	-0.5 to 2.5V	V
Voltage on Vcc supply relative to Vss	V_{CC}	-0.3 to 2.5V	V
Power Dissipation	P_D	1.0	W
Operating Temperature	T_A	-40 to 85	°C

* Stresses greater than those listed above "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted to recommended operating condition. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

FUNCTIONAL DESCRIPTION

$\overline{CS}_1$	CS_2	$\overline{OE}$	$\overline{WE}$	$\overline{LB}$	$\overline{UB}$	I/O ₁₋₈	I/O ₉₋₁₆	Mode	Power
H	X	X	X	X	X	High-Z	High-Z	Deselected	Stand by
X	L	X	X	X	X	High-Z	High-Z	Deselected	Stand by
X	X	X	X	H	H	High-Z	High-Z	Deselected	Stand by
L	H	H	H	L	X	High-Z	High-Z	Output Disabled	Active
L	H	H	H	X	L	High-Z	High-Z	Output Disabled	Active
L	H	L	H	L	H	Data Out	High-Z	Lower Byte Read	Active
L	H	L	H	H	L	High-Z	Data Out	Upper Byte Read	Active
L	H	L	H	L	L	Data Out	Data Out	Word Read	Active
L	H	X	L	L	H	Data In	High-Z	Lower Byte Write	Active
L	H	X	L	H	L	High-Z	Data In	Upper Byte Write	Active
L	H	X	L	L	L	Data In	Data In	Word Write	Active

Note: X means don't care. (Must be low or high state)

RECOMMENDED DC OPERATING CONDITIONS ¹⁾

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	1.65	1.8	2.2	V
Ground	V_{SS}	0	0	0	V
Input high voltage	V_{IH}	1.4	-	$V_{CC} + 0.3^{2)}$	V
Input low voltage	V_{IL}	$-0.3^{3)}$	-	0.4	V

1. $T_A = -40$ to 85°C , otherwise specified
2. Overshoot: $V_{CC} + 1.0$ V in case of pulse width $\leq 20\text{ns}$
3. Undershoot: -1.0 V in case of pulse width $\leq 20\text{ns}$
4. Overshoot and undershoot are sampled, not 100% tested.

CAPACITANCE ¹⁾ ($f = 1\text{MHz}$, $T_A = 25^{\circ}\text{C}$)

Item	Symbol	Test Condition	Min	Max	Unit
Input capacitance	C_{IN}	$V_{IN} = 0\text{V}$	-	8	pF
Input/Output capacitance	C_{IO}	$V_{IO} = 0\text{V}$	-	10	pF

1. Capacitance is sampled, not 100% tested

DC AND OPERATING CHARACTERISTICS

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input leakage current	I_{LI}	$V_{IN} = V_{SS}$ to V_{CC}	-1	-	1	μA
Output leakage current	I_{LO}	$\overline{CS}_1 = V_{IH}$, $CS_2 = V_{IL}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$ or $\overline{LB} = \overline{UB} = V_{IH}$ $V_{IO} = V_{SS}$ to V_{CC}	-1	-	1	μA
Operating power supply	I_{CC}	$I_{IO} = 0\text{mA}$, $\overline{CS}_1 = V_{IL}$, $CS_2 = \overline{WE} = V_{IH}$, $V_{IN} = V_{IH}$ or V_{IL}	-	-	2	mA
Average operating current	I_{CC1}	Cycle time = $1\mu\text{s}$, 100% duty, $I_{LO} = 0\text{mA}$, $\overline{CS}_1 \leq 0.2\text{V}$, $\overline{LB} \leq 0.2\text{V}$ or/and $\overline{UB} \leq 0.2\text{V}$, $CS_2 \geq V_{CC} - 0.2\text{V}$ $V_{IN} \leq 0.2\text{V}$ or $V_{IN} \geq V_{CC} - 0.2\text{V}$	-	-	2	mA
	I_{CC2}	Cycle time = Min, $I_{IO} = 0\text{mA}$, 100% duty, $\overline{CS}_1 = V_{IL}$, $CS_2 = V_{IH}$, $\overline{LB} = V_{IL}$ or/and $\overline{UB} = V_{IL}$ $V_{IN} = V_{IL}$ or V_{IH}	-	-	15	mA
Output low voltage	V_{OL}	$I_{OL} = 0.1\text{mA}$	-	-	0.2	V
Output high voltage	V_{OH}	$I_{OH} = -0.1\text{mA}$	1.4	-	-	V
Standby Current (CMOS)	I_{SB1}	$\overline{CS}_1 \geq V_{CC} - 0.2\text{V}$, $CS_2 \geq V_{CC} - 0.2\text{V}$ ($\overline{CS}_1$ controlled) or $0\text{V} \leq CS_2 \leq 0.2\text{V}$ (CS_2 controlled), Other inputs = $0 \sim V_{CC}$ (Typ. condition : $V_{CC} = 1.8\text{V}$ @ 25°C) (Max. condition : $V_{CC} = 2.2\text{V}$ @ 85°C)	LL LF	-	1	5 μA

AC OPERATING CONDITIONS

Test Conditions (Test Load and Test Input/Output Reference)

Input Pulse Level : 0.2 to VCC-0.2V

Input Rise and Fall Time : 5ns

Input and Output reference Voltage : 0.9V


Output Load (See right) : CL = 100pF + 1 TTL

CL¹⁾ = 30pF + 1 TTL

1. Including scope and Jig capacitance

2. R₁=3070 ohm, R₂=3150 ohm

3. V_{TM}=1.8V

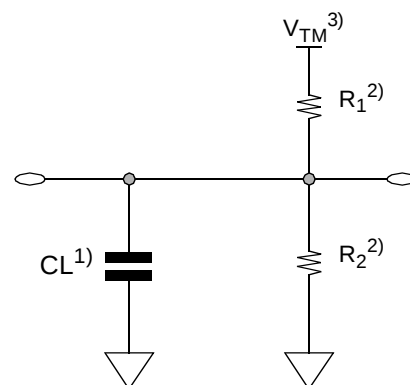


READ CYCLE (V_{CC}=1.65 to 2.2V, Gnd = 0V, T_A = -40°C to +85°C)

Parameter	Symbol	70ns		Unit
		Min	Max	
Read Cycle Time	t _{RC}	70	-	ns
Address Access Time	t _{AA}	-	70	ns
Chip Select to output	t _{CO1} , t _{CO2}	-	70	ns
Output Enable to valid output	t _{OE}	-	35	ns
UB, LB Access time	t _{BA}		70	ns
Chip select to low-Z output	t _{LZ1} , t _{LZ2}	10	-	ns
UB, LB enable to low-Z output	t _{BLZ}	10	-	ns
Output Enable to Low-Z output	t _{OLZ}	5	-	ns
Chip disable to high-Z output	t _{HZ1} , t _{HZ2}	0	25	ns
UB, LB disable to high-Z output	t _{BHZ}	0	25	ns
Output disable to high-Z output	t _{OHZ}	0	25	ns
Output hold from address change	t _{OH}	10	-	ns


WRITE CYCLE (V_{CC}=1.65 to 2.2V, Gnd = 0V, T_A = -40°C to +85°C)

Parameter	Symbol	70ns		Unit
		Min	Max	
Write Cycle Time	t _{WC}	70	-	ns
Chip Select to end of write	t _{CW1} , t _{CW2}	60	-	ns
Address Setup time	t _{AS}	0	-	ns
Address valid to end of write	t _{AW}	60	-	ns
UB, LB valid to end of write	t _{BW}	60	-	ns
Write pulse width	t _{WP}	55	-	ns
Write recovery time	t _{WR}	0	-	ns
Write to output high-Z	t _{WHZ}	0	25	ns
Data to write time overlap	t _{DW}	30		ns
Data hold from write time	t _{DH}	0	-	ns
End write to output low-Z	t _{OW}	5	-	ns


TIMING WAVEFORM OF READ CYCLE(1). (Address Controlled, $\overline{\text{CS}}1=\overline{\text{OE}}=V_{\text{IL}}$, $\text{CS}2=\overline{\text{WE}}=V_{\text{IH}}$, $\overline{\text{UB}}$ or/and $\overline{\text{LB}}=V_{\text{IL}}$)




TIMING WAVEFORM OF WRITE CYCLE(1) ($\overline{WE}$ CONTROLLED)

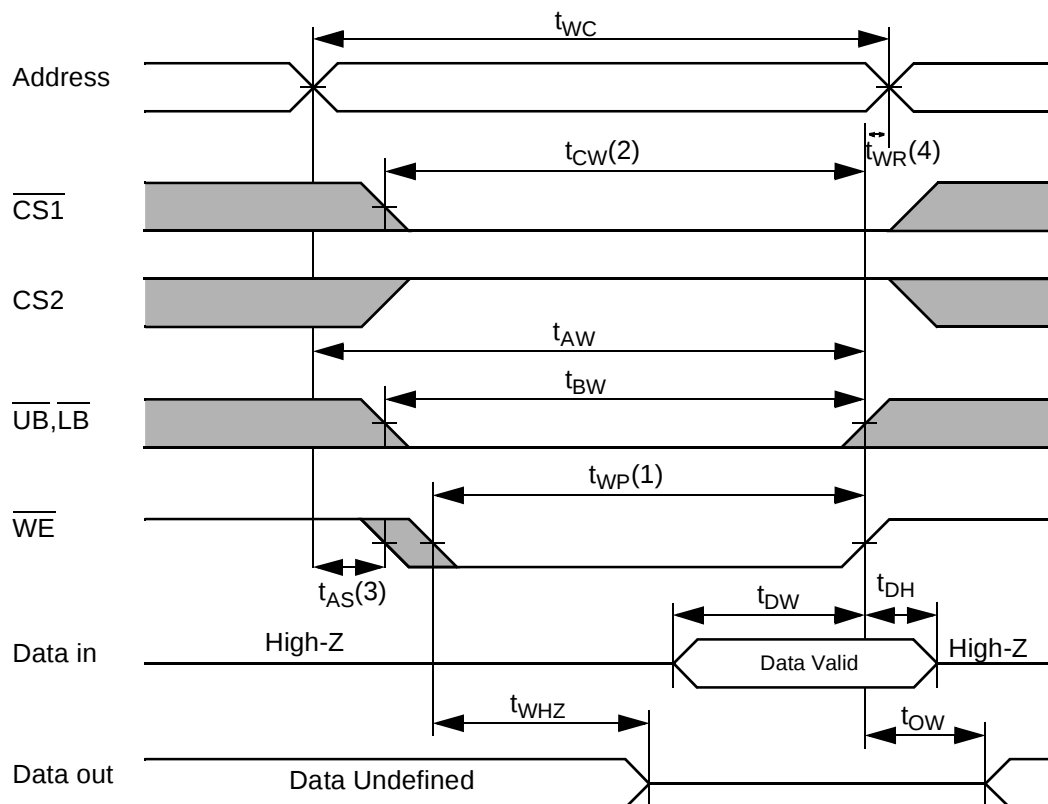

TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS1}$ CONTROLLED)

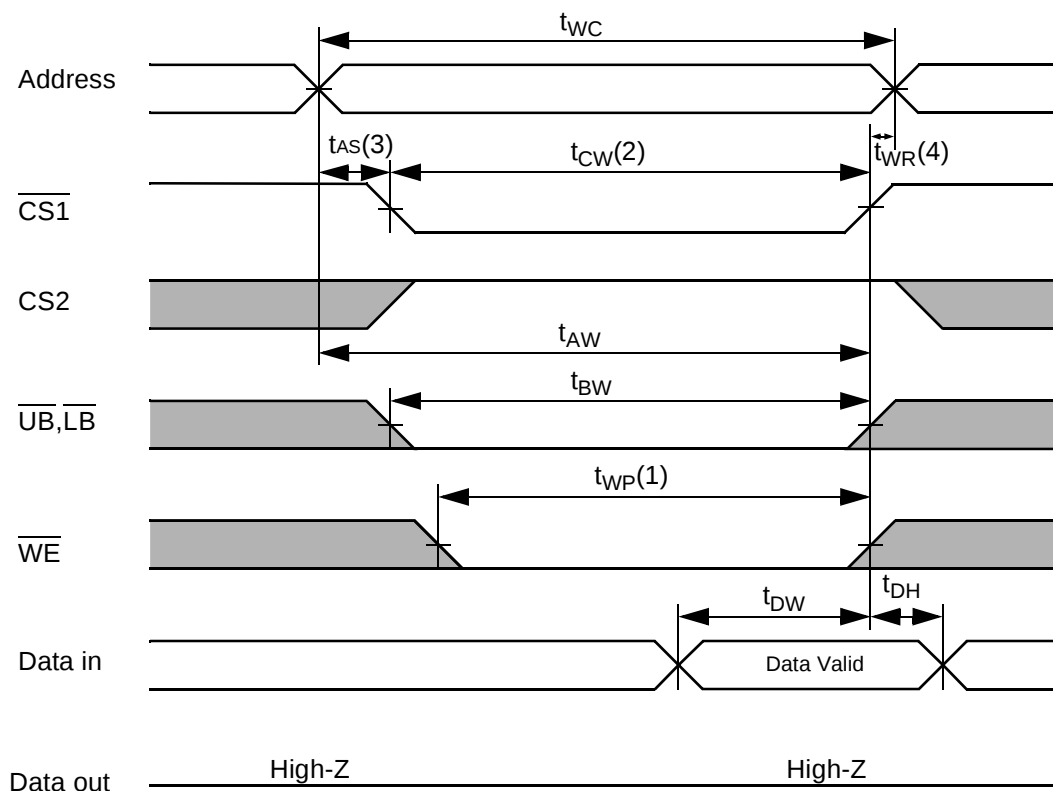

TIMING WAVEFORM OF WRITE CYCLE(3) ($\overline{UB}$, $\overline{LB}$ CONTROLLED)

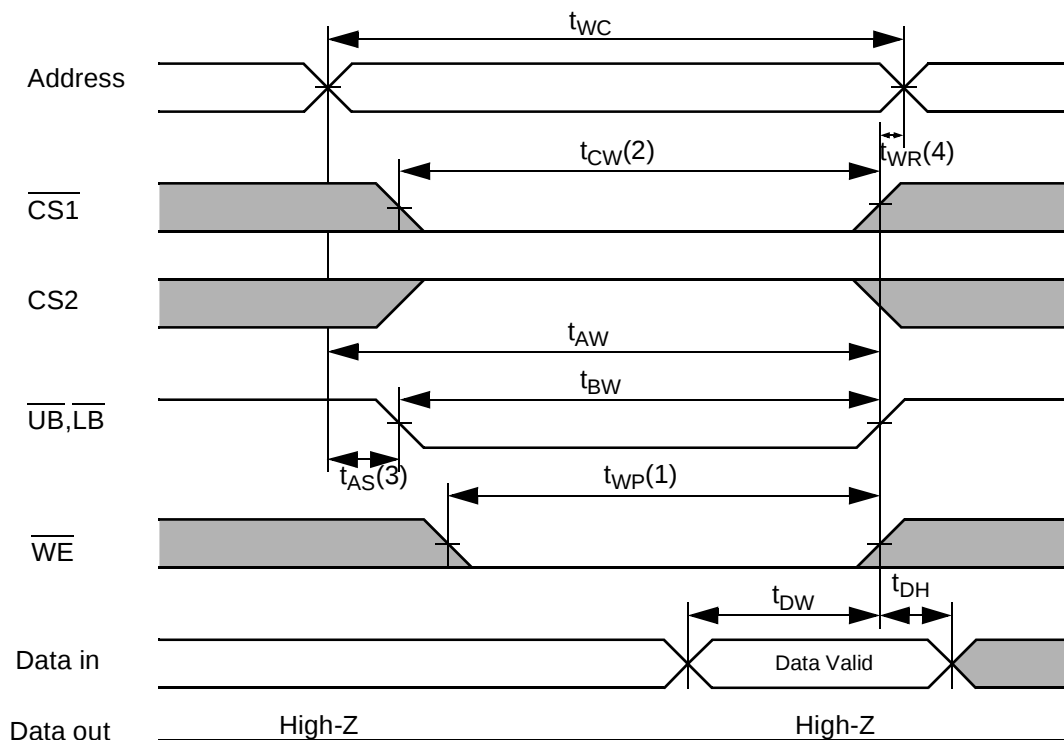

NOTES (WRITE CYCLE)

1. A write occurs during the overlap(t_{WP}) of low $\overline{CS1}$ and low $\overline{WE}$. A write begins when $\overline{CS1}$ goes low and $\overline{WE}$ goes low with asserting $\overline{UB}$ or $\overline{LB}$ for single byte operation or simultaneously asserting $\overline{UB}$ and $\overline{LB}$ for double byte operation. A write ends at the earliest transition when $\overline{CS1}$ goes high and $\overline{WE}$ goes high. The t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the $\overline{CS1}$ going low to end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR} applied in case a write ends as $\overline{CS1}$ or $\overline{WE}$ going high.


DATA RETENTION CHARACTERISTICS

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
V _{CC} for Data Retention	V _{DR}	I _{SB1} Test Condition (Chip Disabled) ¹⁾	1.0	-	2.2	V
Data Retention Current	I _{DR}	V _{CC} =1.2V, I _{SB1} Test Condition (Chip Disabled) ¹⁾	-	0.5	2	uA
Chip Deselect to Data Retention Time	t _{SDR}	See data retention wave form	0	-	-	ns
Operation Recovery Time	t _{RDR}		t _{RC}	-	-	

NOTES

1. See the I_{SB1} measurement condition of datasheet page 4.


DATA RETENTION WAVE FORM

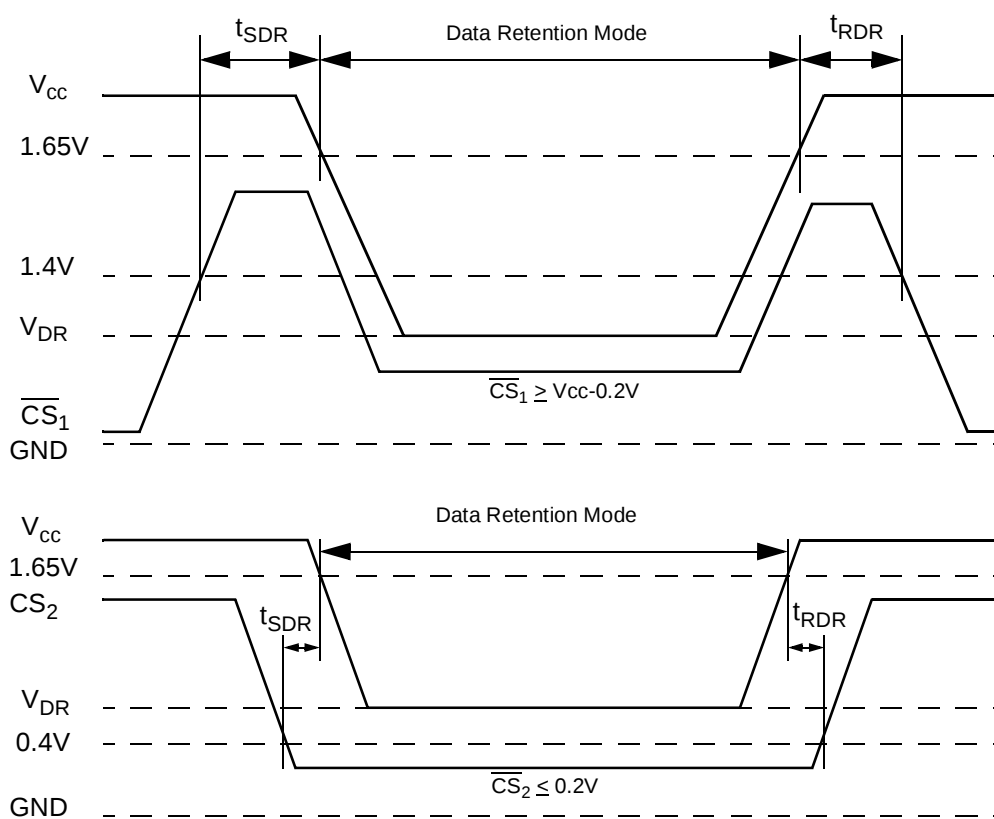

Unit: millimeters

PACKAGE DIMENSION

48 Ball Fine Pitch BGA (0.75mm ball pitch)

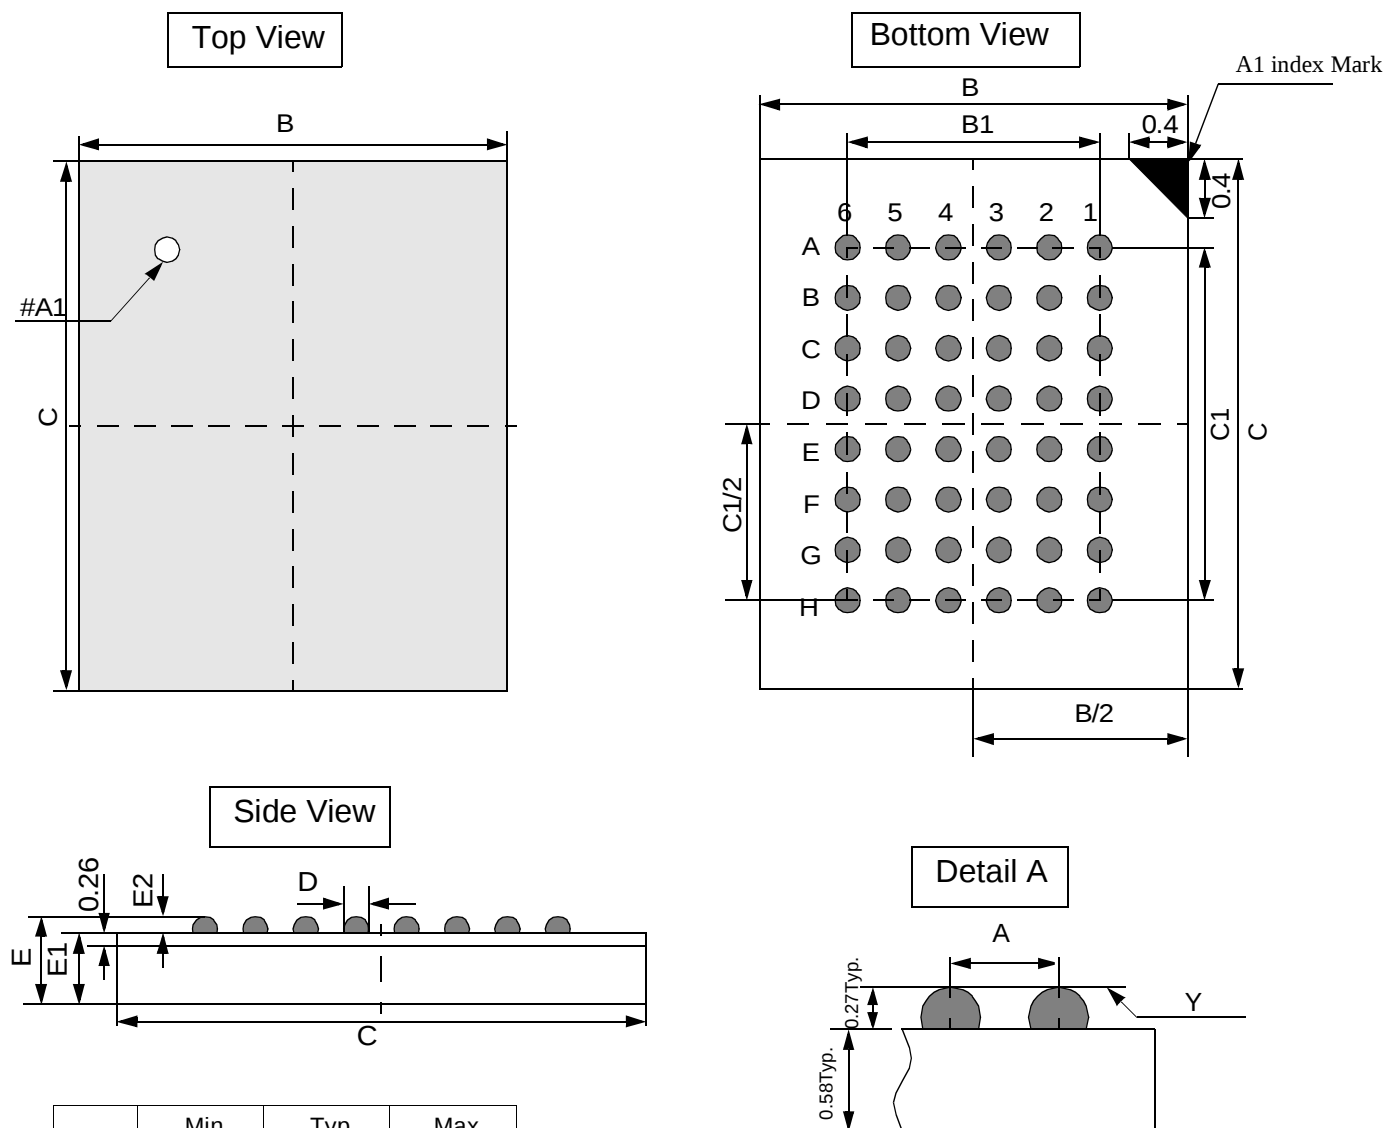


	Min	Typ	Max
A	-	0.75	-
B	5.95	6.00	6.05
B1	-	3.75	-
C	6.95	7.00	7.05
C1	-	5.25	-
D	0.30	0.35	0.40
E	-	0.85	0.90
E1	-	0.58	-
E2	-	0.27	-
Y	-	-	0.08

NOTES.

1. Bump counts : 48(8row x 6column)
2. Bump pitch : (x,y)=(0.75x0.75) (typ.)
3. All tolerance are +/-0.050 unless otherwise specified.
4. Typ : Typical
5. Y is coplanarity : 0.08(Max)

MEMORY FUNCTION GUIDE

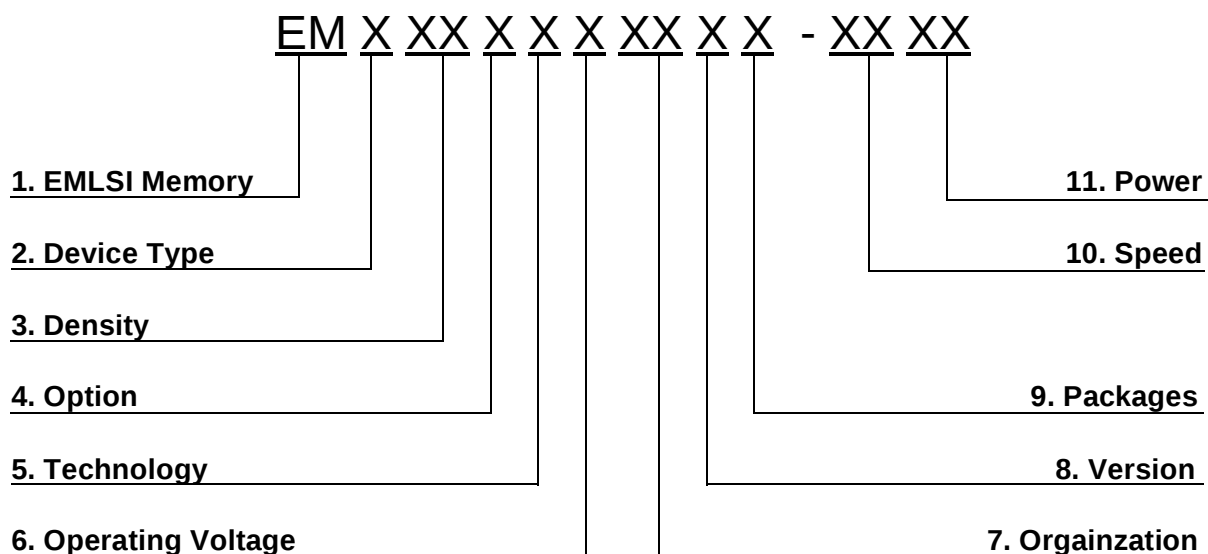

1. Memory Component

2. Device Type

- 6 ----- Low Power SRAM
- 7 ----- Pseudo SRAM

3. Density

- 1 ----- 1M
- 2 ----- 2M
- 4 ----- 4M
- 8 ----- 8M
- 16 ----- 16M
- 32 ----- 32M
- 64 ----- 64M

4. Option

- 0 ----- Dual CS
- 1 ----- Single CS

5. Technology

- Blank ----- CMOS
- F ----- Full CMOS

6. Operating Voltage

- Blank ----- 5V
- V ----- 3.3V
- U ----- 3.0V
- S ----- 2.5V
- R ----- 2.0V
- P ----- 1.8V

7. Organization

- 8 ----- x8 bit
- 16 ----- x16 bit
- 32 ----- x32 bit

8. Version

- Blank ----- Mother die
- A ----- First version
- B ----- Second version
- C ----- Third version
- D ----- Fourth version
- E ----- Fifth version

9. Package

- Blank ----- Package
- W ----- Wafer

10. Speed

- 45 ----- 45ns
- 55 ----- 55ns
- 70 ----- 70ns
- 85 ----- 85ns
- 10 ----- 100ns
- 12 ----- 120ns

11. Power

- LL ----- Low Low Power
- LF ----- Low Low Power(Pb-Free & Green)
- L ----- Low Power
- S ----- Standard Power