

[Document Title](#)

512K x16 bit Low Power and Low Voltage Full CMOS Static RAM

[Revision History2.1](#)

Revision No.	History	Draft Date	Remark
0.0	Initial Draft	Oct. 26, 2006	Preliminary
0.1	0.1 Revision	Jan. 18, 2007	Production code change from EM681FV16U-45LL to EM681FV16U-45LF
0.2	0.2 Revision	April. 10, 2007	Production code change from EM681FV16U-45LF to EM681FV16AU-45LF
0.3	0.3 Revision	June 15, 2007	Product code table update
0.4	0.4 Revision	Nov. 12, 2007	Fix typo error

Emerging Memory & Logic Solutions Inc.

4F Korea Construction Financial Cooperative B/D, 301-1 Yeon-Dong, Jeju-Si, Jeju-Do, Rep.of Korea Zip Code : 690-719
Tel : +82-64-740-1712 Fax : +82-64-740-1749~1750 / Homepage : www.emlsi.com

The attached data sheets are provided by EMLSI reserve the right to change the specifications and products. EMLSI will answer to your questions about device. If you have any questions, please contact the EMLSI office.

FEATURES

- Process Technology : 0.15 μ m Full CMOS
- Organization : 512K x 16 bit
- Power Supply Voltage : 2.7V ~ 3.6V
- Low Data Retention Voltage : 1.5V (Min.)
- Three state output and TTL Compatible
- Package Type : 44-TSOP2


GENERAL DESCRIPTION

The EM681FV16AU is fabricated by EMLSI's advanced full CMOS process technology. The families support industrial temperature range and Chip Scale Package for user flexibility of system design. The families also supports low data retention voltage for battery back-up operation with low data retention current.

PRODUCT FAMILY


Product Family	Operating Temperature	Vcc Range	Speed	Power Dissipation		PKG Type
				Standby (I _{SB1} , Typ.)	Operating (I _{CC1} , Max)	
EM681FV16AU-45LF	Industrial (-40 ~ 85°C)	2.7V~3.6V	45ns	2 μ A	4mA	44-TSOP2
EM681FV16AU-55LF	Industrial (-40 ~ 85°C)	2.7V~3.6V	55ns	2 μ A	4mA	44-TSOP2
EM681FV16AU-70LF	Industrial (-40 ~ 85°C)	2.7V~3.6V	70ns	2 μ A	4mA	44-TSOP2

PIN DESCRIPTION

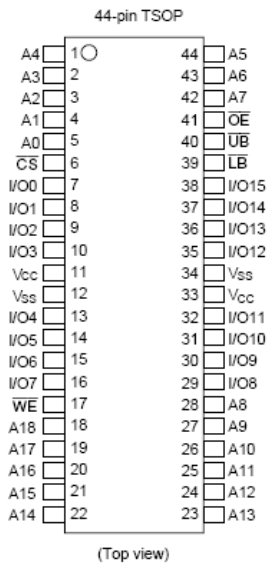

44-TSOP2 : Top view

FUNCTIONAL BLOCK DIAGRAM

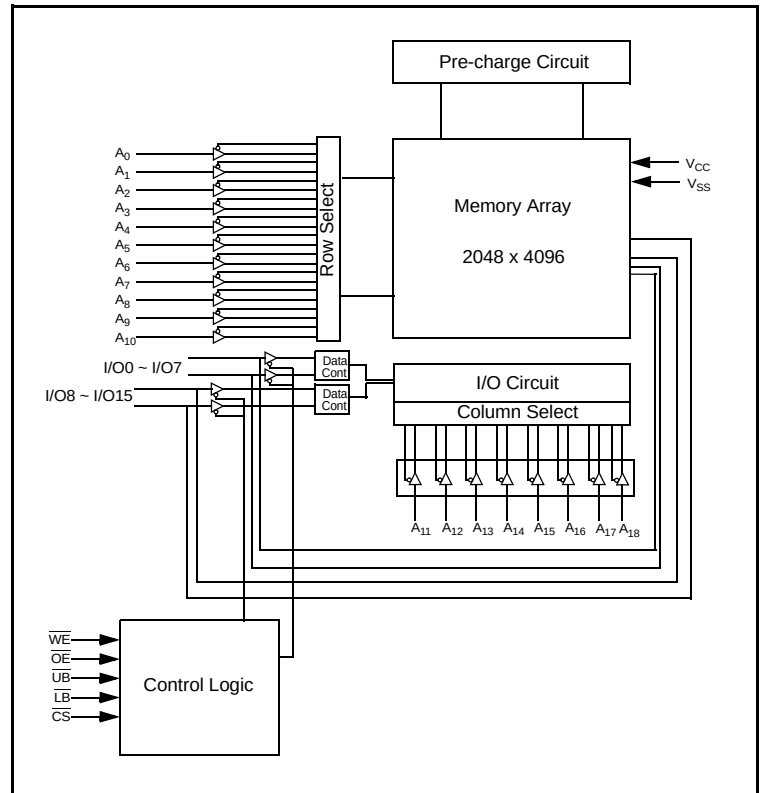

Name	Function	Name	Function
$\overline{CS}$	Chip select inputs	Vcc	Power Supply
$\overline{OE}$	Output Enable input	Vss	Ground
$\overline{WE}$	Write Enable input	$\overline{UB}$	Upper Byte (I/O ₈₋₁₅)
A ₀ ~A ₁₈	Address Inputs	$\overline{LB}$	Lower Byte (I/O ₀₋₇)
I/O ₀ ~I/O ₁₅	Data Inputs/outputs	NC	No Connected

ABSOLUTE MAXIMUM RATINGS *

Parameter	Symbol	Minimum	Unit
Voltage on Any Pin Relative to Vss	V_{IN}, V_{OUT}	-0.2 to 4.0V	V
Voltage on Vcc supply relative to Vss	V_{CC}	-0.2 to 4.0V	V
Power Dissipation	P_D	1.0	W
Operating Temperature	T_A	-40 to 85	°C

* Stresses greater than those listed above "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted to recommended operating condition. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

FUNCTIONAL DESCRIPTION

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	$\overline{LB}$	$\overline{UB}$	I/O ₀₋₇	I/O ₈₋₁₅	Mode	Power
H	X	X	X	X	High-Z	High-Z	Deselected	Stand by
X	X	X	H	H	High-Z	High-Z	Deselected	Stand by
L	H	H	X	X	High-Z	High-Z	Output Disabled	Active
L	L	H	L	H	Data Out	High-Z	Lower Byte Read	Active
L	L	H	H	L	High-Z	Data Out	Upper Byte Read	Active
L	L	H	L	L	Data Out	Data Out	Word Read	Active
L	X	L	L	H	Data In	High-Z	Lower Byte Write	Active
L	X	L	H	L	High-Z	Data In	Upper Byte Write	Active
L	X	L	L	L	Data In	Data In	Word Write	Active

Note: X means don't care. (Must be low or high state)

RECOMMENDED DC OPERATING CONDITIONS ¹⁾

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	2.7	3.3	3.6	V
Ground	V_{SS}	0	0	0	V
Input high voltage	V_{IH}	2.2	-	$V_{CC} + 0.2^{2)}$	V
Input low voltage	V_{IL}	-0.2 ³⁾	-	0.6	V

1. $T_A = -40$ to 85°C , otherwise specified
2. Overshoot: $V_{CC} + 2.0$ V in case of pulse width $\leq 20\text{ns}$
3. Undershoot: -2.0 V in case of pulse width $\leq 20\text{ns}$
4. Overshoot and undershoot are sampled, not 100% tested.

CAPACITANCE ¹⁾ ($f = 1\text{MHz}$, $T_A = 25^\circ\text{C}$)

Item	Symbol	Test Condition	Min	Max	Unit
Input capacitance	C_{IN}	$V_{IN} = 0\text{V}$	-	8	pF
Input/Output capacitance	C_{IO}	$V_{IO} = 0\text{V}$	-	10	pF

1. Capacitance is sampled, not 100% tested

DC AND OPERATING CHARACTERISTICS

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Input leakage current	I _{LI}	V _{IN} =V _{SS} to V _{CC}		-1	-	1	uA
Output leakage current	I _{LO}	CS=V _{IH} or OE=V _{IH} or WE=V _{IL} or LB=UB=V _{IH} V _{IO} =V _{SS} to V _{CC}		-1	-	1	uA
Operating power supply	I _{CC}	I _{IO} =0mA, CS=V _{IL} , WE=V _{IH} , V _{IN} =V _{IH} or V _{IL}		-	-	2	mA
Average operating current	I _{CC1}	Cycle time=1μs, 100% duty, I _{IO} =0mA, CS≤0.2V, LB≤0.2V or/and UB≤0.2V, V _{IN} ≤0.2V or V _{IN} ≥V _{CC} -0.2V		-	-	4	mA
	I _{CC2}	Cycle time = Min, I _{IO} =0mA, 100% duty, CS=V _{IL} , LB=V _{IL} or/and UB=V _{IL} , V _{IN} =V _{IL} or V _{IH}	45ns 55ns 70ns	-	-	45 35 25	mA
Output low voltage	V _{OL}	I _{OL} = 2.1mA		-	-	0.4	V
Output high voltage	V _{OH}	I _{OH} = -1.0mA		2.2	-	-	V
Standby Current (TTL)	I _{SB}	CS=V _{IH} , Other inputs=V _{IH} or V _{IL}		-	-	0.5	mA
Standby Current (CMOS)	I _{SB1}	CS≥V _{CC} -0.2V Other inputs=0 ~ V _{CC} (Typ. condition : V _{CC} =3.3V @ 25°C) (Max. condition : V _{CC} =3.6V @ 85°C)	LF	-	2	15	uA

AC OPERATING CONDITIONS

Test Conditions (Test Load and Test Input/Output Reference)

Input Pulse Level : 0.4 to 2.4V

Input Rise and Fall Time : 5ns

Input and Output reference Voltage : 1.5V

Output Load (See right) : $CL^{(1)} = 100\text{pF} + 1 \text{ TTL (70nsec)}$


$CL^{(1)} = 30\text{pF} + 1 \text{ TTL (45ns/55ns)}$

1. Including scope and Jig capacitance

2. $R_1=3070 \text{ ohm}$, $R_2=3150 \text{ ohm}$

3. $V_{TM}=2.8\text{V}$

4. $CL = 5\text{pF} + 1 \text{ TTL (measurement with } t_{LZ}, t_{HZ}, t_{OLZ}, t_{OHZ}, t_{WHZ})$

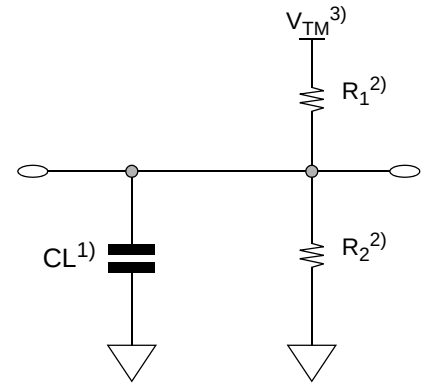


READ CYCLE ($V_{CC}=2.7 \text{ to } 3.6\text{V}$, $Gnd = 0\text{V}$, $T_A = -40^\circ\text{C to } +85^\circ\text{C}$)

Parameter	Symbol	45ns		55ns		70ns		Unit
		Min	Max	Min	Max	Min	Max	
Read cycle time	t_{RC}	45	-	55	-	70	-	ns
Address access time	t_{AA}	-	45	-	55	-	70	ns
Chip select to output	t_{CO}	-	45	-	55	-	70	ns
Output enable to valid output	t_{OE}	-	30	-	35	-	35	ns
$\overline{UB}$, $\overline{LB}$ access time	t_{BA}		45		55		70	ns
Chip select to low-Z output	t_{LZ}	5	-	5	-	5	-	ns
$\overline{UB}$, $\overline{LB}$ enable to low-Z output	t_{BLZ}	5	-	5	-	5	-	ns
Output enable to low-Z output	t_{OLZ}	5	-	5	-	5	-	ns
Chip disable to high-Z output	t_{HZ}	0	20	0	20	0	25	ns
$\overline{UB}$, $\overline{LB}$ disable to low-Z output	t_{BHZ}	0	20	0	20	0	25	ns
Output disable to high-Z output	t_{OHZ}	0	20	0	20	0	25	ns
Output hold from address change	t_{OH}	10	-	10	-	10	-	ns


WRITE CYCLE ($V_{CC}=2.7 \text{ to } 3.6\text{V}$, $Gnd = 0\text{V}$, $T_A = -40^\circ\text{C to } +85^\circ\text{C}$)

Parameter	Symbol	45ns		55ns		70ns		Unit
		Min	Max	Min	Max	Min	Max	
Write cycle time	t_{WC}	45	-	55	-	70	-	ns
Chip select to end of write	t_{CW}	45	-	45	-	60	-	ns
Address setup time	t_{AS}	0	-	0	-	0	-	ns
Address valid to end of write	t_{AW}	45	-	45	-	60	-	ns
$\overline{UB}$, $\overline{LB}$ valid to end of write	t_{BW}	45	-	45	-	60	-	ns
Write pulse width	t_{WP}	45	-	45	-	55	-	ns
Write recovery time	t_{WR}	0	-	0	-	0	-	ns
Write to output high-Z	t_{WHZ}	0	20	0	20	0	25	ns
Data to write time overlap	t_{DW}	25		30		30		ns
Data hold from write time	t_{DH}	0	-	0	-	0	-	ns
End write to output low-Z	t_{OW}	5	-	5		5	-	ns


TIMING WAVEFORM OF WRITE CYCLE(1) ($\overline{WE}$ CONTROLLED)

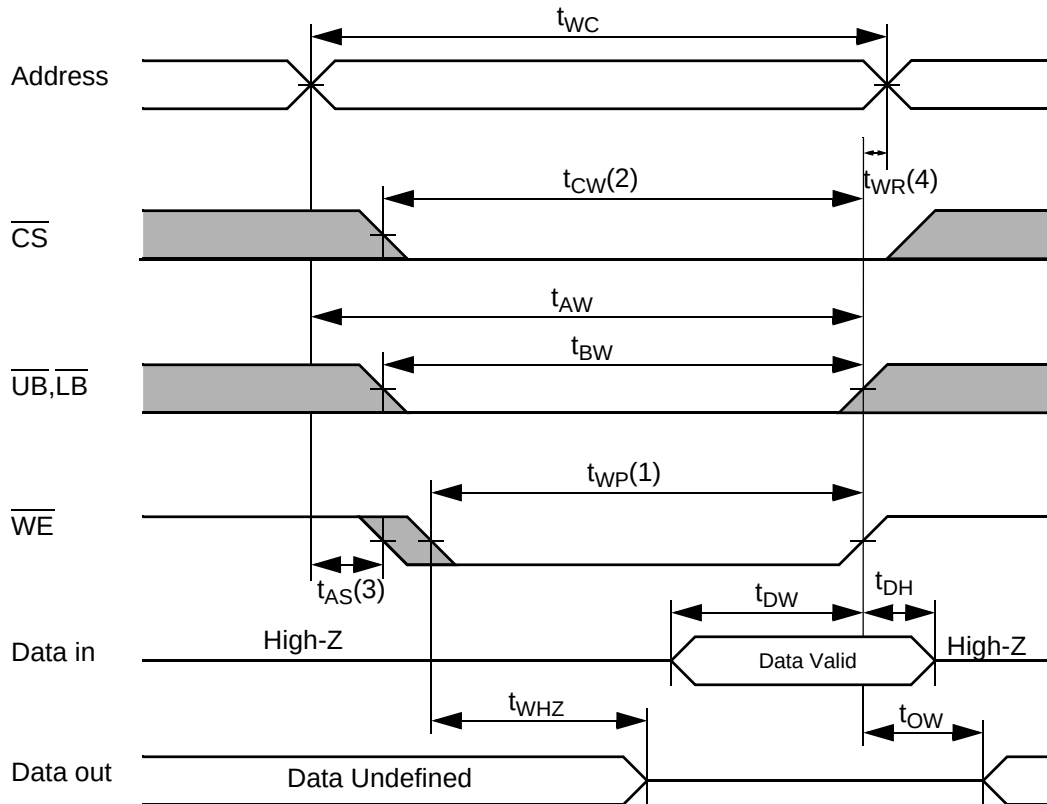

TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS}$ CONTROLLED)

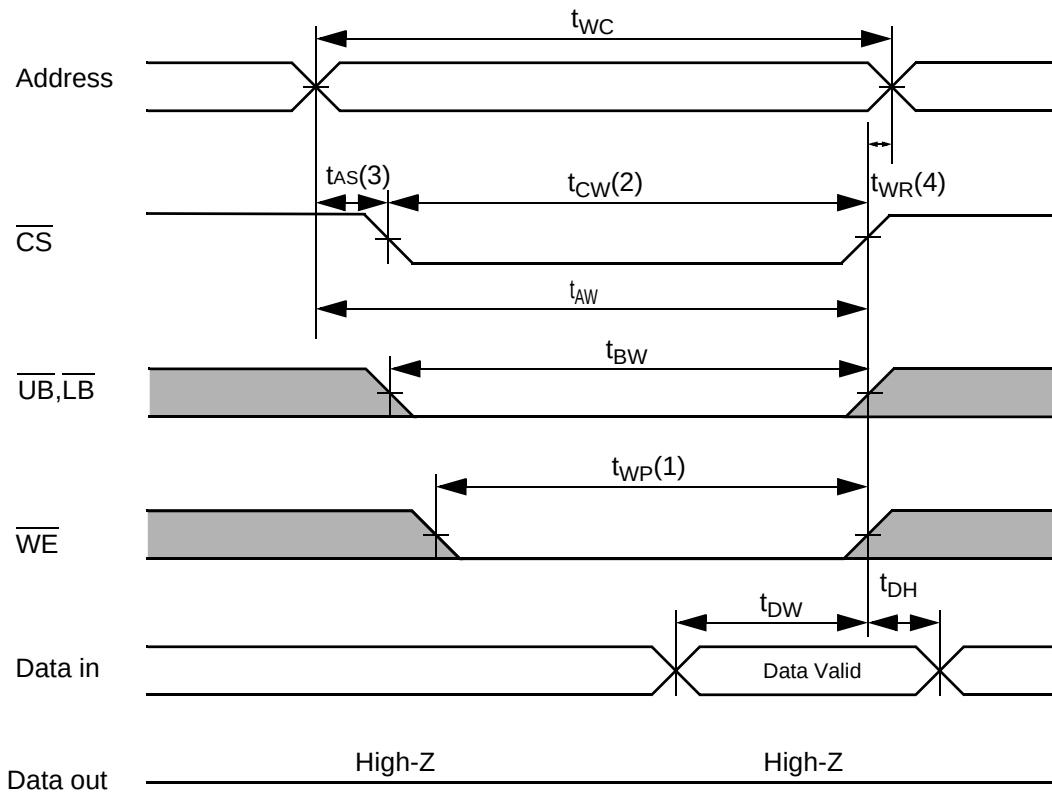

TIMING WAVEFORM OF WRITE CYCLE(3) ($\overline{UB}$, $\overline{LB}$ CONTROLLED)

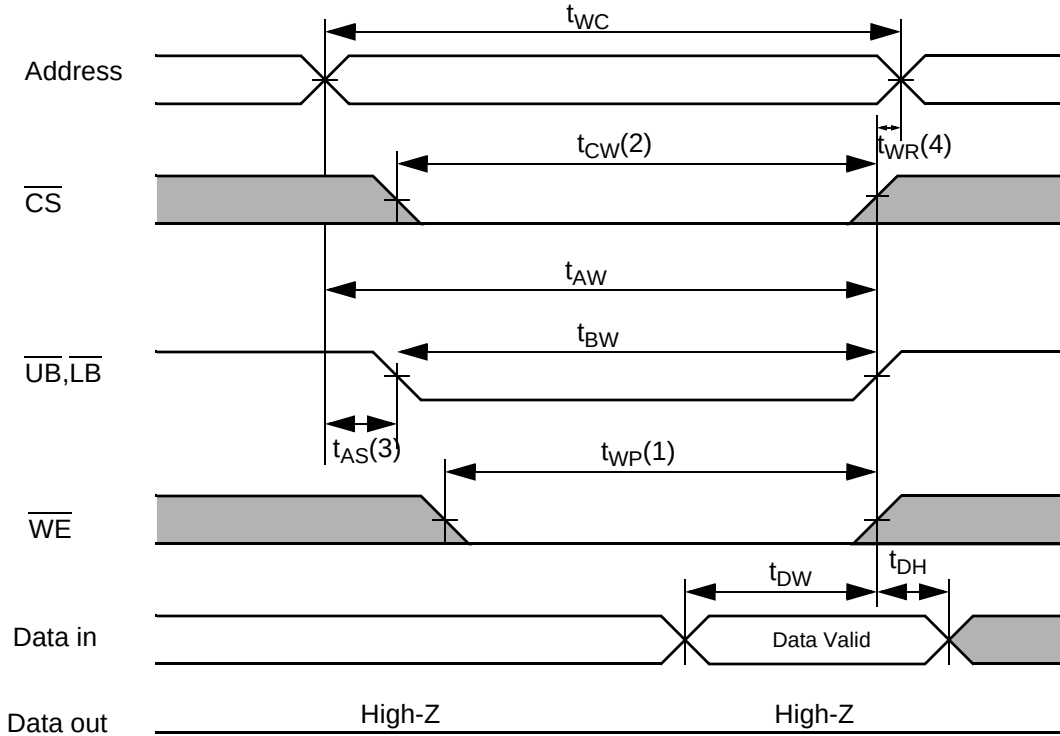

NOTES (WRITE CYCLE)

1. A write occurs during the overlap(t_{WP}) of low $\overline{CS}$ and low $\overline{WE}$. A write begins when $\overline{CS}$ goes low and $\overline{WE}$ goes low with asserting $\overline{UB}$ or $\overline{LB}$ for single byte operation or simultaneously asserting $\overline{UB}$ and $\overline{LB}$ for double byte operation. A write ends at the earliest transition when $\overline{CS}$ goes high and $\overline{WE}$ goes high. The t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the $\overline{CS}$ going low to end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR} applied in case a write ends as $\overline{CS}$ or $\overline{WE}$ going high.


DATA RETENTION CHARACTERISTICS

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
V_{CC} for Data Retention	V_{DR}	I_{SB1} Test Condition (Chip Disabled) ¹⁾	1.5	-	3.6	V
Data Retention Current	I_{DR}	$V_{CC}=1.5V$, I_{SB1} Test Condition (Chip Disabled) ¹⁾	-	-	4	μA
Chip Deselect to Data Retention Time	t_{SDR}	See data retention wave form	0	-	-	ns
Operation Recovery Time	t_{RDR}		t_{RC}	-	-	

NOTES

1. See the I_{SB1} measurement condition of data sheet page 4.


DATA RETENTION WAVE FORM

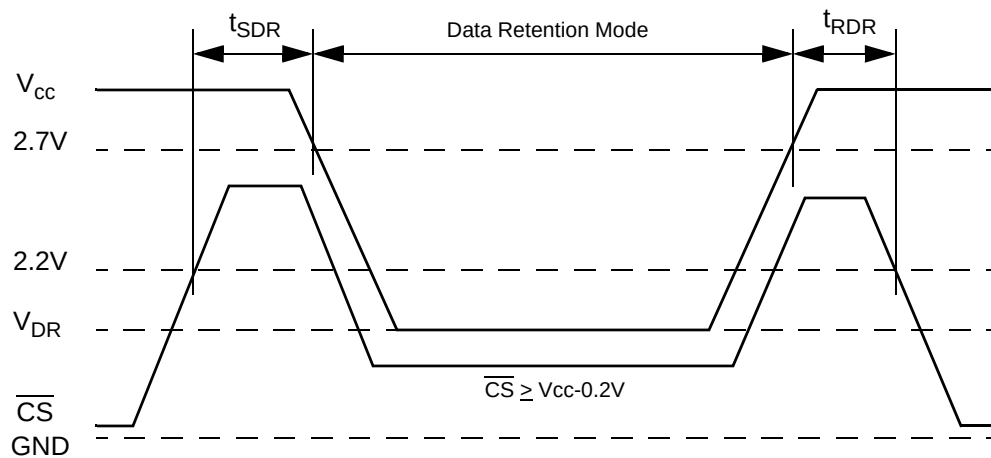

PACKAGE DIMENSION


44 - TSOP2 (0.8mm pin pitch)

As of January, 2002
Unit: mm

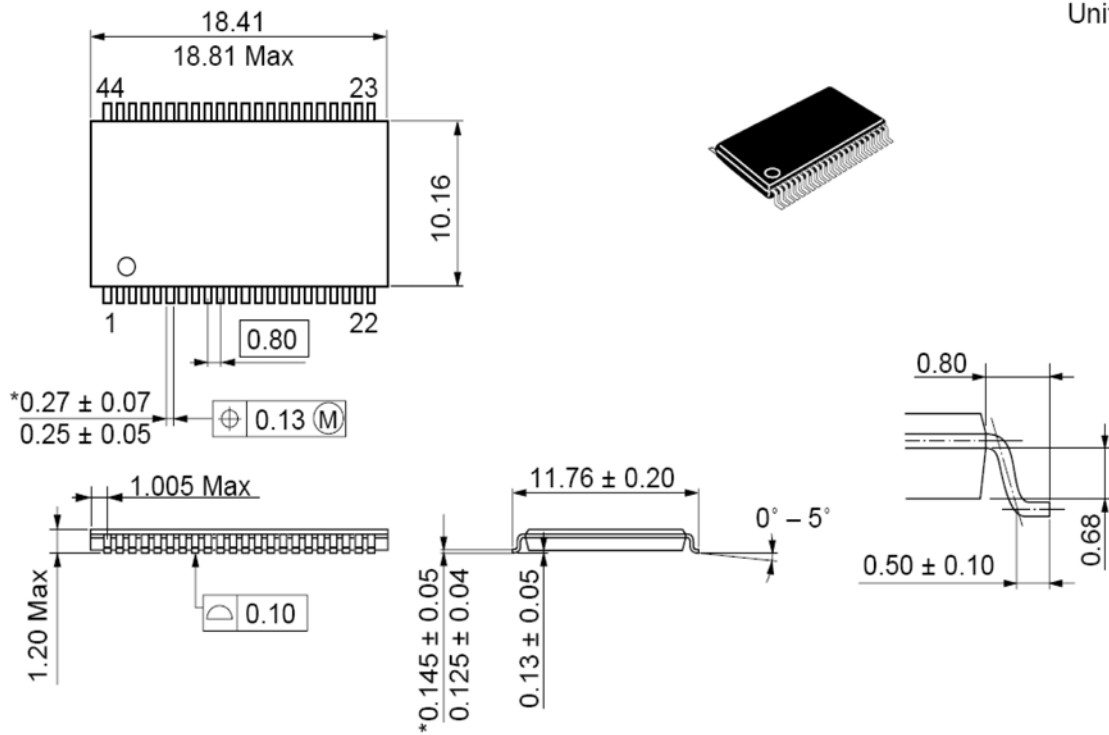

*Dimension including the plating thickness
Base material dimension

SRAM PART CODING SYSTEM

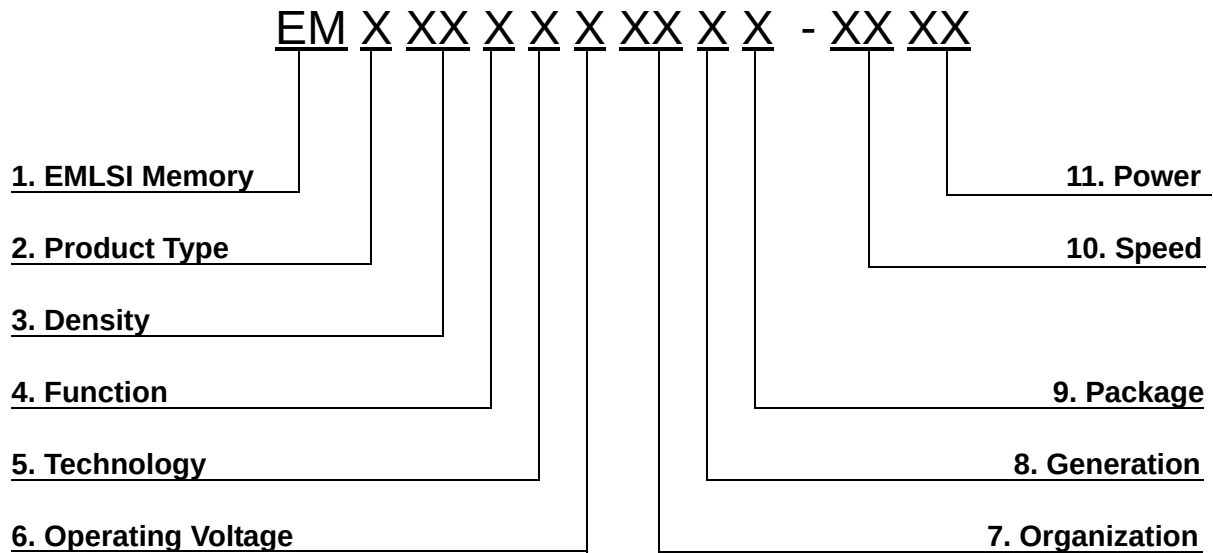

1. Memory Component
EM ----- Memory

2. Product Type
6 ----- SRAM

3. Density
1 ----- 1M
2 ----- 2M
4 ----- 4M
8 ----- 8M

4. Function
0 ----- Dual CS
1 ----- Single CS
2 ----- Multiplexed
3 ----- Single CS / LBB, UBB(tBA=tOE)
4 ----- Single CS / LBB, UBB(tBA=tCO)
5 ----- Dual CS / LBB, UBB(tBA=tOE)
6 ----- Dual CS / LBB, UBB(tBA=tCO)

5. Technology
F ----- Full CMOS

6. Operating Voltage
T ----- 5.0V
V ----- 3.3V
U ----- 3.0V
S ----- 2.5V
R ----- 2.0V
P ----- 1.8V

7. Organization
8 ----- x8 bit
16 ----- x16 bit

8. Generation
Blank ----- 1st generation
A ----- 2nd generation
B ----- 3rd generation
C ----- 4th generation
D ----- 5th generation
E ----- 6th generation
F ----- 7th generation
G ----- 8th generation

9. Package
Blank ----- KGD, 48&36FpBGA
S ----- 32 sTSOP1
T ----- 32 TSOP1
U ----- 44 TSOP2
V ----- 32 SOP

10. Speed
45 ----- 45ns
55 ----- 55ns
70 ----- 70ns
85 ----- 85ns
10 ----- 100ns
12 ----- 120ns

11. Power
LL ----- Low Low Power
LF ----- Low Low Power(Pb-Free & Green)
L ----- Low Power
S ----- Standard Power