E4/STM-1/STS-3/OC-3 Interface Transformer


EPR1622SE

- Designed for TDK 78P2253 Transceiver
- Meets or exceeds IEC 950 Standards
- Operating Temperature -40°C to +85°C
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (μH Min.)	**Return Loss** (dB Min.)	**Insertion Loss** (dB Max.)	**DCR** (Ω Max.)
36	-15	-3	0.30
Pins 1-3/6-8	8 MHz	0.1 MHz-400 MHz	

Schematic

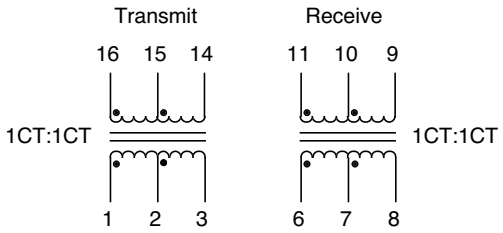

Package

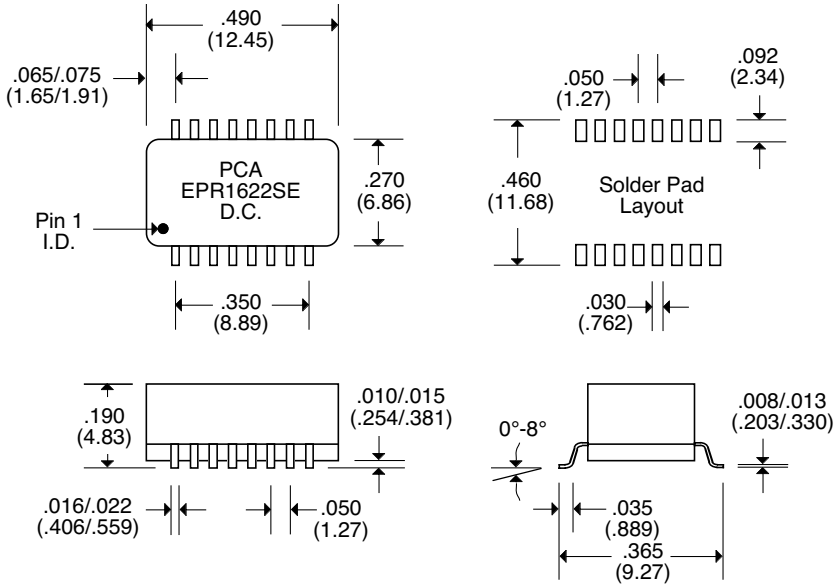

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.

CSR1622SE Rev. - 5/11/05 JDG

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com