FAST RECOVERY RECTIFIER

VOLTAGE RANGE: 1000 V
CURRENT: 0.1 A


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon,Alcohol,Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case:JEDEC DO-41,molded plastic
- ◇ Terminals: Axial lead ,solderable per MIL- STD-202,Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces,0.34 grams
- ◇ Mounting position: Any

DO - 41

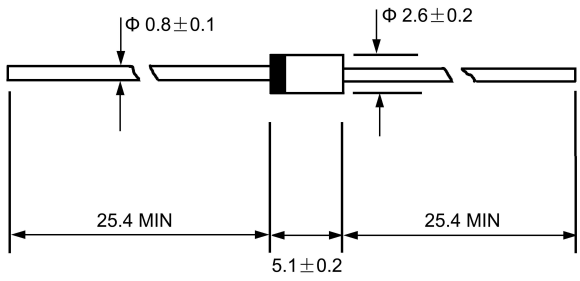

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.


		ERA34-10	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	1000	V
Maximum RMS voltage	V_{RMS}	700	V
Maximum DC blocking voltage	V_{DC}	1000	V
Maximum average forw ard rectified current 9.5mm lead length, @T_A=75℃	$I_{F(AV)}$	0.1	A
Peak forw ard surge current 8.3ms single half-sine-w ave superimposed on rated load @T_J=125℃	I_{FSM}	10.0	A
Maximum instantaneous forw ard voltage @ 0.1 A	V_F	1.0	V
Maximum reverse current @T_A=25℃	I_R	5.0	μA
at rated DC blocking voltage @T_A=100℃		100.0	
Maximum reverse recovery time (Note1)	t_{rr}	150	ns
Typical junction capacitance (Note2)	C_J	12	pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	55	℃/W
Operating junction temperature range	T_J	-55----+150	℃
Storage temperature range	T_{STG}	-55----+150	℃


NOTE:1. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

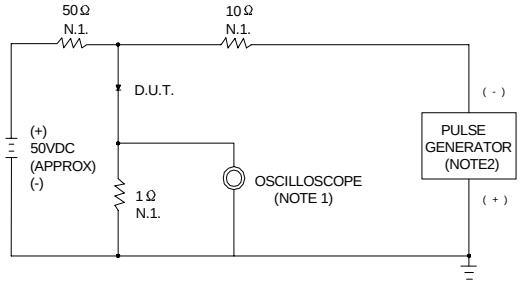

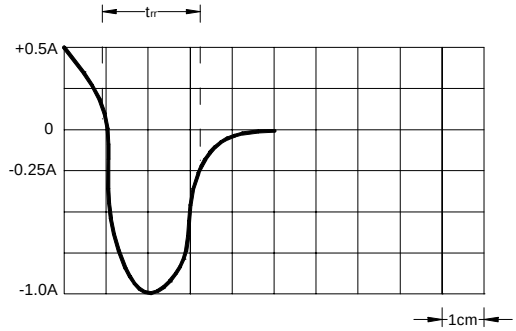

NOTES:1.RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ.22pF

2.RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

SET TIME BASE FOR 50/100 ns /cm

FIG.2 –FORWARD DERATING CURVE

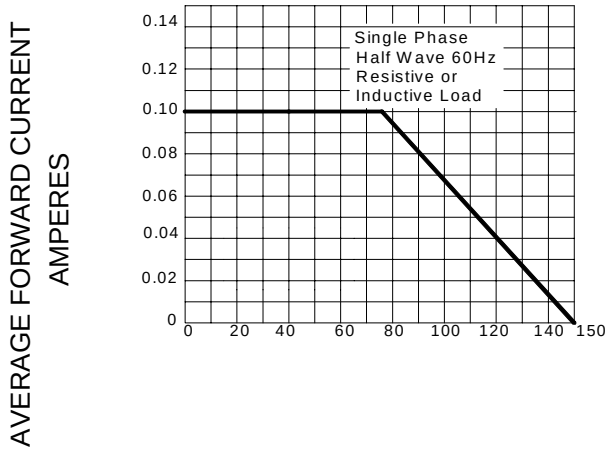


FIG.3—TYPICAL JUNCTION CAPACITANCE

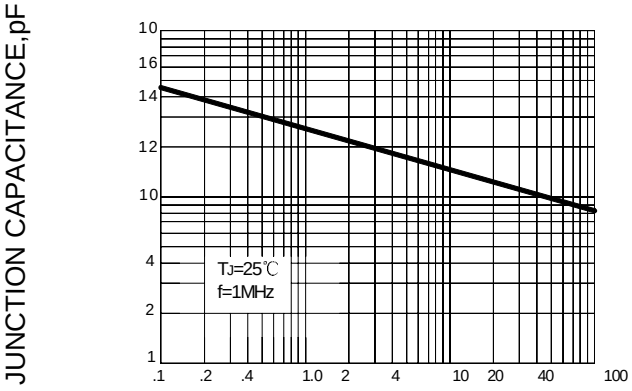


FIG.4–PEAK FORWARD SURGE CURREN

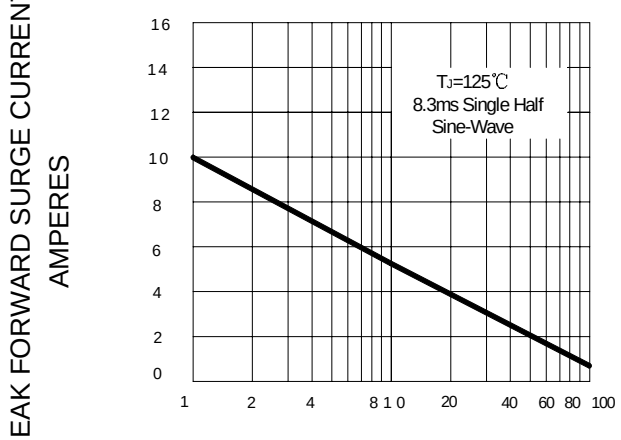


FIG.5—TYPICAL FORWARD CHARACTERISTIC

