EUROSTYLE P.C.B. TERMINAL BLOCK

E133988(R)


ETB12 SERIES | WIRE PROTECTOR, RIGHT ANGLE TYPE | PITCH=5.0 / 10.0mm

FEATURES

- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

SPECIFICATIONS

Pitch	5.0mm, 10.0mm
Wire range	22~14 AWG (2.5mm²)
No. of pole per block	2P or 3P
Rating	8 Amp, 300 VAC
Housing	PA66
Terminals	Tin plated over Brass
Screws	M2.6x0.45P, Zinc plated over Steel
Wire protector	Stainless Steel
Torque	0.25 N-m (2.18 lb-in) (tested by manual torque screwdriver)
Operating temperature	-30℃~+110℃ (includes temperature rise limit)
Stripping length	6mm
UL Approval	300V, 8A, 22~14 AWG

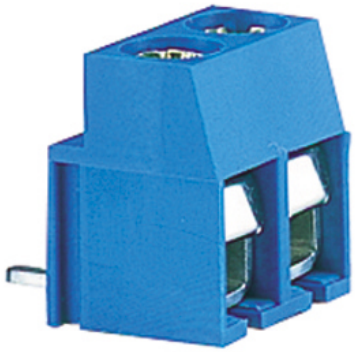


PART NUMBERING SYSTEM

ETB 12 XX X X X 00 Z

- Z: RoHS Compliant
- Special number
- Screw type: 0: “+” screw; 1: “-” screw
- Housing color: B: Blue; G: Green; K: Black
- Pitch: 0: Standard pitch; 1: Standard pitchx2
- Number of poles
- Series
- Model

DRAWING

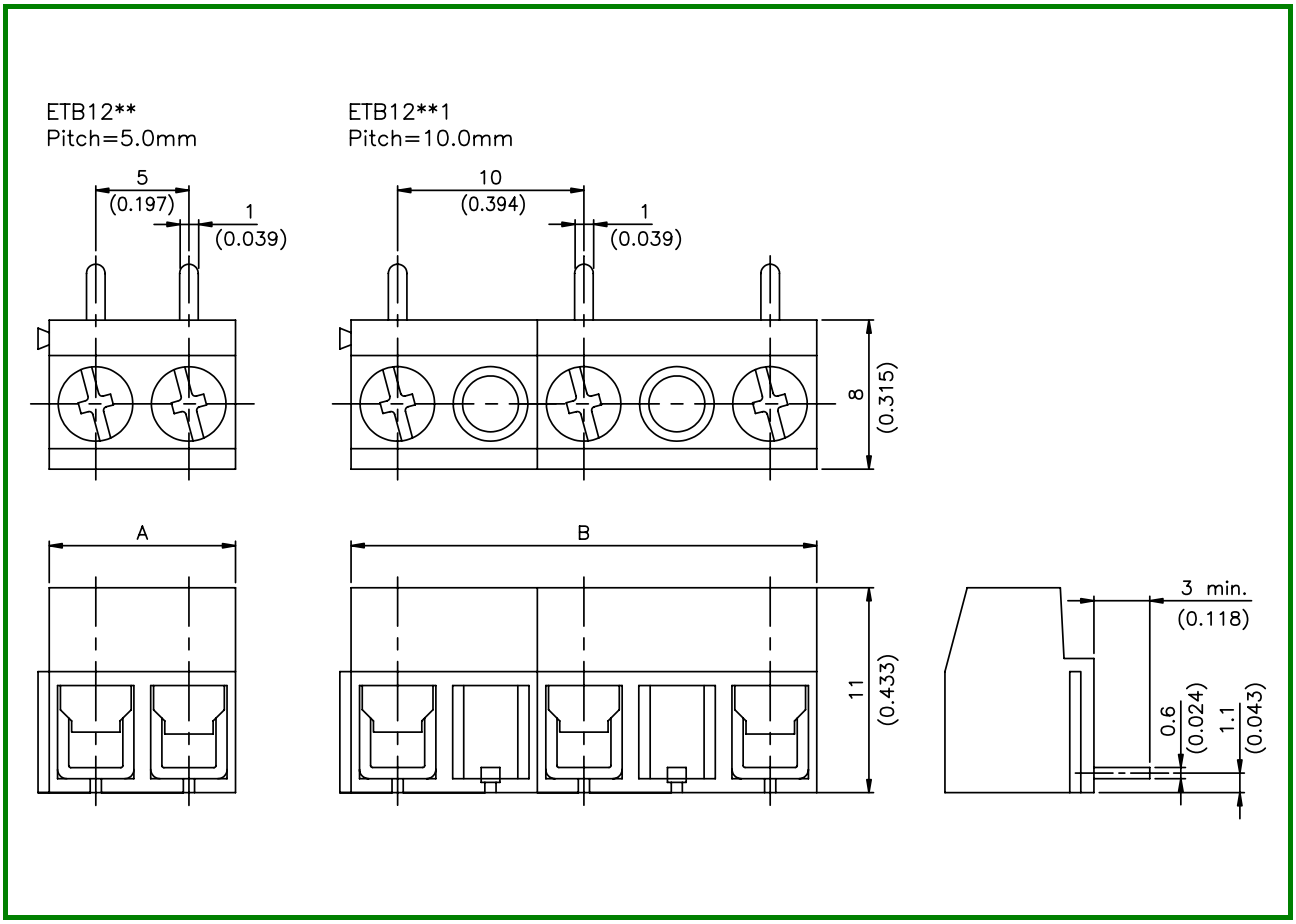

POLE / DIM.	2	3	4	5	6	7	8	9	10	11	12	13
A	10 (0.394)	15 (0.591)	20 (0.787)	25 (0.984)	30 (1.181)	35 (1.378)	40 (1.575)	45 (1.772)	50 (1.969)	55 (2.165)	60 (2.362)	65 (2.559)
B	15 (0.591)	25 (0.984)	35 (1.378)	45 (1.772)	55 (2.165)	65 (2.559)	75 (2.953)	85 (3.346)	95 (3.740)	105 (4.134)	115 (4.528)	
POLE / DIM.	14	15	16	17	18	19	20	21	22	23	24	
A	70 (2.756)	75 (2.953)	80 (3.150)	85 (3.346)	90 (3.543)	95 (3.740)	100 (3.937)	105 (4.134)	110 (4.331)	115 (4.528)	120 (4.724)	