



# EV2667-G-00A

## Evaluation Board of 1A Linear Charger with Power Path Management for Single-Cell Li-Ion Battery in QFN Package

### DESCRIPTION

The EV2667-G-00A is an evaluation board for the MP2667, a highly-integrated single-cell Li-Ion/Li-Polymer battery charger with system power path management, targeted at space limited portable applications. It takes input power from either an AC adapter or a USB port to supply the system load and charge the battery independently. The charger section features constant current pre charge (PRE.C), constant current fast charge (CC), constant voltage (CV) regulation, charge termination, and charge status.

EV2667 ensures the continuous power to the system by automatically selecting the input, the battery or both to power the system.

EV2667 provides system short circuit protection to prevent the Li-Ion battery from being damaged due to excessive high current.

EV2667 cuts off the path between battery and system when battery UVLO to prevent the Li-Ion battery from being overly discharged.

Through the I2C connector on EV2667, the customer can program the charging parameters, such as: input current limit, input minimum voltage regulation, charging current, battery regulation voltage, and battery UVLO.

### ELECTRICAL SPECIFICATION

| Parameter                        | Symbol        | Value        | Units |
|----------------------------------|---------------|--------------|-------|
| Input Voltage                    | $V_{IN}$      | 4.35 - 5.5   | V     |
| Battery Voltage                  | $V_{BATT}$    | 3.60 - 4.545 | V     |
| Input Current Limit              | $I_{IN\_LIM}$ | 77- 993      | mA    |
| Input Minimum Voltage Regulation | $V_{IN\_MIN}$ | 3.88 -5.08   | V     |
| Fast Charge Current              | $I_{CC}$      | 26 - 1049    | mA    |
| Discharge Current                | $I_{DSCHG}$   | 100 - 1600   | mA    |

### FEATURES


- Fully Autonomous Charger for Single-Cell Li-Ion/Polymer Batteries
- Current Limit for USB Port
- Complete Power Path Management for Simultaneously Powering the System and Charging the Battery
- $\pm 0.5\%$  Charging Voltage Accuracy
- 13V Maximum Voltage for the Input Source
- I<sup>2</sup>C Interface for Setting charging Parameters and Status Reporting
- Robust Charging Protection Including Battery Temperature Monitor and Programmable Timer
- Battery Disconnection Function

### APPLICATIONS

- Wearable devices
- Smart Handheld Devices
- Fitness Accessories
- Smart Watches

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

## EV2667-G-00A EVALUATION BOARD

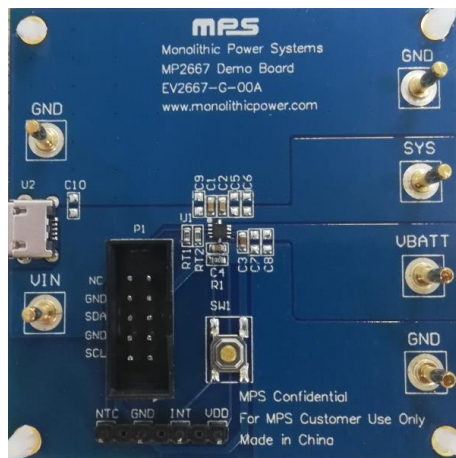


(L x W x H) 2.5" x 2.5" x 0.063"  
(6.35cm x 6.35cm x 0.16cm)

| Board Number | MPS IC Number  |
|--------------|----------------|
| EV2667-G-00A | MP2667GG-xxxx* |

\*: "xxxx" is the register setting option. The factory default is "0000". This content can be viewed in I<sup>2</sup>C register map. For customer options, please contact an MPS FAE to obtain an "xxxx" value.

## EVALUATION BOARD SCHEMATIC

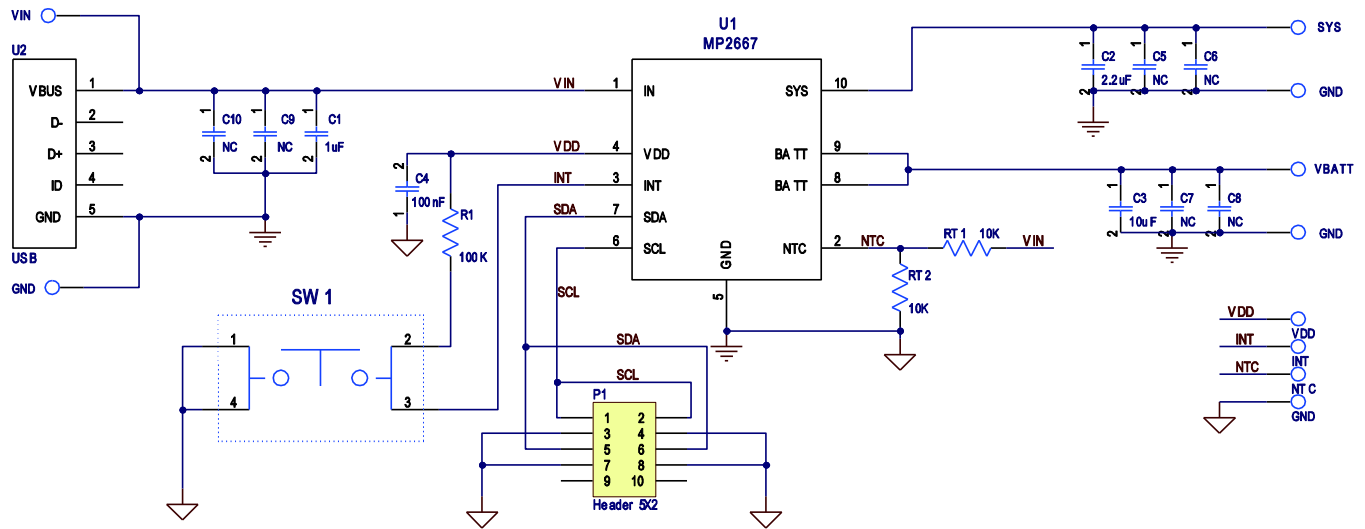

## EV2667-G-00A BILL OF MATERIALS

| Qty | Ref            | Value         | Description                     | Package | Manufacture | Manufacture_PN     |
|-----|----------------|---------------|---------------------------------|---------|-------------|--------------------|
| 1   | C1             | 1 $\mu$ F     | Ceramic Capacitor;25V;X7R;0603; | 0603    | muRata      | GRM188R71E105KA12D |
| 1   | C2             | 2.2 $\mu$ F   | Capacitor;16V;X5R               | 0603    | muRata      | GRM188R61C225KE15D |
| 1   | C3             | 10 $\mu$ F    | Capacitor;16V;X5R               | 0603    | muRata      | GRM188R61C106KAALD |
| 1   | C4             | 100nF         | Ceramic Capacitor;50V;X7R       | 0603    | Murata      | GCJ188R71H104KA12D |
| 4   | C5, C6, C7, C8 | NC            | Ceramic Capacitor;16V;X7R;0805  | 0805    | muRata      | GRM21BR71C475KA73L |
| 2   | C9, C10        | NC            | Ceramic Capacitor;25V;X7R;0805; | 0805    | muRata      | GRM21BR71E225KA73L |
| 1   | P1             |               | Header, 5-Pin, Dual row         |         |             |                    |
| 1   | R1             | 100k $\Omega$ | Film Resistor;1%;               | 0603    | Yageo       | RC0603FR-07100KL   |
| 2   | RT1, RT2       | 10k $\Omega$  | Film Resistor;1%;               | 0603    | Yageo       | RC0603FR-0710KL    |
| 1   | U2             |               | Micro-B USB connector;          |         |             |                    |
| 1   | U1             |               | 2X2mm                           | QFN-10  | MPS         | MP2667GG-xxxx      |

## PRINTED CIRCUIT BOARD LAYOUT

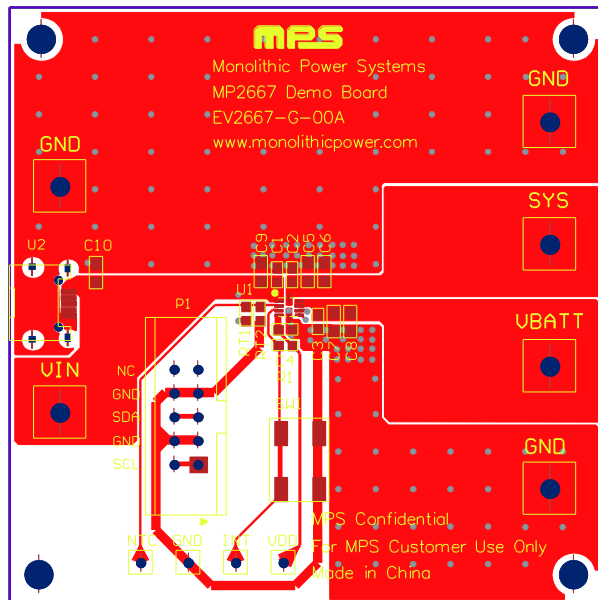


Figure 1: Top Layer

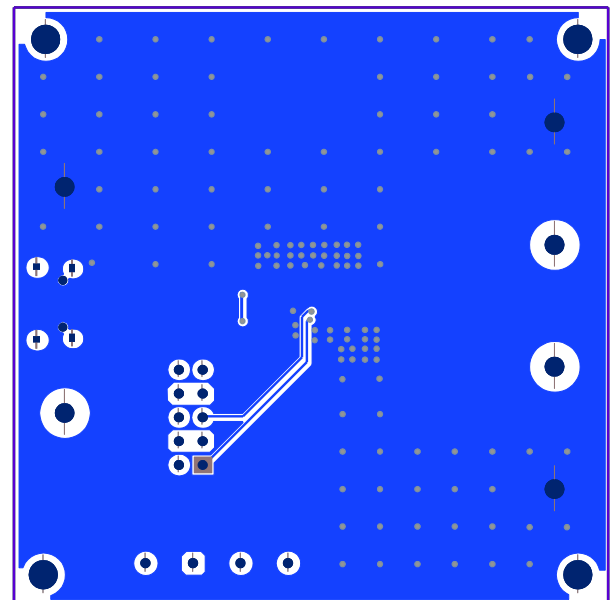


Figure 2: Bottom Layer

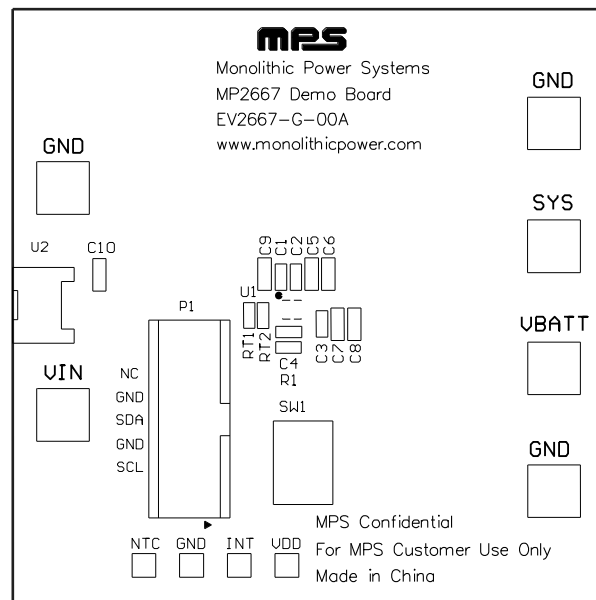


Figure 3: Top Silk Layer

## QUICK START GUIDE

This board is designed for MP2667 which is a highly-integrated single-cell Li-Ion/Li-Polymer battery charger with system power path management function. And layout accommodates most commonly used capacitors. The default function of this board is preset for charger mode and the charge full voltage is preset to 4.200V for 1 cell Li-Ion battery.

Evaluation Platform Preparation:

- 1) A computer with at least one USB port and a USB cable. The MP2667 evaluation software must be properly installed.
- 2) USB-to-I<sup>2</sup>C Communication Kit (EVKT-USBI2C-02)



**Figure 4: USB-to-I<sup>2</sup>C Communication Kit**

- 3) Software - Double-click on the “MP2667 Evaluation Kit” EXE file to run the MP2667 evaluation software. The software supports the Windows® XP and Windows 7 operating systems.

The MP2667 Evaluation Kit EXE file is available on MPS website:

<http://hz-coc-ebench/InstallationFile.aspx?categoryID=7>

GUI

Show  entries

| Name                                            | Description                                                              | Download                 |
|-------------------------------------------------|--------------------------------------------------------------------------|--------------------------|
| MP2638 Evaluation Kit                           | I2C evaluation kit software for MP2638, V1.1.7.                          | <a href="#">Download</a> |
| MP2638A Evaluation Kit                          | Evaluation kit for MP2638A, V1.0. Parts supported: MP2638A.              | <a href="#">Download</a> |
| MP2650                                          | for Charge group                                                         | <a href="#">Download</a> |
| MP2660 Evaluation Kit                           | I2C evaluation kit software for MP2660, V1.6.7. Parts supported: MP2660. | <a href="#">Download</a> |
| MP2661 Evaluation Kit                           | I2C evaluation kit software for MP2661, V1.1.5. Parts supported: MP2661. | <a href="#">Download</a> |
| MP2662 Evaluation Kit                           | I2C evaluation kit software for MP2662, V1.0.                            | <a href="#">Download</a> |
| MP2663 Evaluation Kit                           | I2C evaluation kit software for MP2663, V1.0. Parts supported: MP2663.   | <a href="#">Download</a> |
| MP2664 Evaluation Kit                           | I2C evaluation kit software for MP2664, V1.1.                            | <a href="#">Download</a> |
| <b>MP2667 Evaluation Kit</b> <small>NEW</small> | I2C evaluation kit software for MP2667, V1.0. Parts supported: MP2667.   | <a href="#">Download</a> |
| MP2669 Evaluation Kit                           | I2C evaluation kit software for MP2669, V1.0.                            | <a href="#">Download</a> |

Previous 1 2 3 4 Next

Figure 5: MP2667 Evaluation Kit EXE file on Ebench

#### 4) Original Test Setup for MP2667 in Figure6

Attach the input voltage ( $V_{IN}=5V$ ) and the input ground to the VIN and GND pins, respectively.

Attach the positive and negative ends of the load to the SYS and GND pins, respectively.

Attach the positive and negative ends of the battery ( $V_{BATT}=3 - 4.2V$ ) to the BATT and GND pins, respectively.

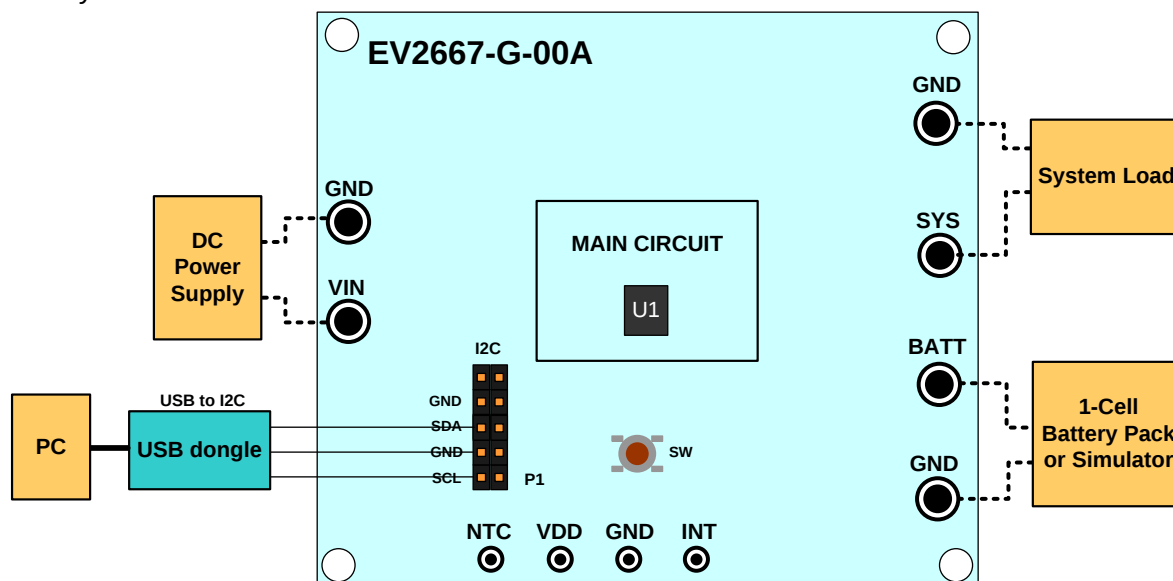


Figure 6: Test Setup for MP2667

5) Turn on the computer. Launch the MP2667 evaluation software. The main window of the software is shown in Figure 7.

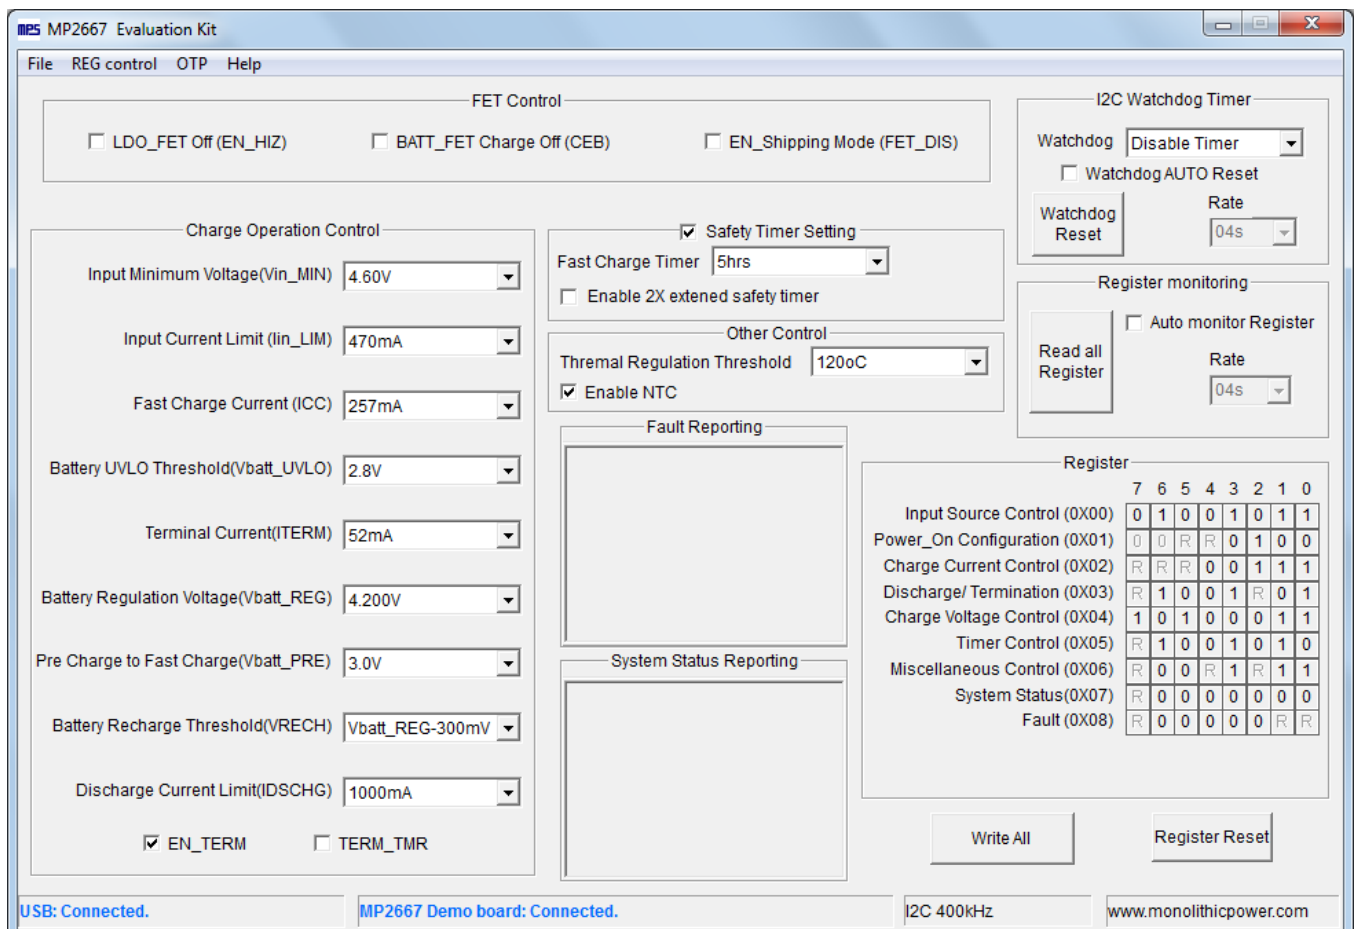


Figure 7: MP2667 evaluation interface

## Procedure

Make sure all the connections are normal – both the USB-to-I2C Communication Kit and the EV2667-G-00A are connected correctly. It is ready to run the program!

## Charger Function

Charge Operation Control

Input Minimum Voltage(Vin\_MIN)

4.60V

Input Current Limit (Iin\_LIM)

470mA

Fast Charge Current (ICC)

257mA

Battery UVLO Threshold(Vbatt\_UVLO)

2.8V

Terminal Current(ITERM)

52mA

Battery Regulation Voltage(Vbatt\_REG)

4.200V

Pre Charge to Fast Charge(Vbatt\_PRE)

3.0V

Battery Recharge Threshold(VRECH)

Vbatt\_REG-300mV

Discharge Current Limit(IDSCHG)

1000mA

☒ EN\_TERM

☐ TERM\_TMR

- Set Input Minimum Voltage at 4.60 V (the range is 3.88 - 5.08V)

Input Minimum Voltage(Vin\_MIN)

4.60V

4.60V

4.68V

4.76V

4.84V

4.92V

5.00V

5.08V

2. Set Input Current Limit to 470mA (the range is 77 – 993mA)

|                               |       |
|-------------------------------|-------|
| Input Current Limit (lin_LIM) | 470mA |
|                               | 118mA |
|                               | 345mA |
|                               | 470mA |
|                               | 540mA |
|                               | 635mA |
|                               | 734mA |
|                               | 993mA |

3. Set Fast Charge Current to 257mA (the range is 26 – 1049mA)

|                           |       |
|---------------------------|-------|
| Fast Charge Current (ICC) | 257mA |
|                           | 257mA |
|                           | 290mA |
|                           | 323mA |
|                           | 356mA |
|                           | 389mA |
|                           | 422mA |
|                           | 455mA |
|                           | 488mA |
|                           | 521mA |
|                           | 554mA |
|                           | 587mA |

4. Set BATT UVLO threshold to 2.8V (the range is 2.4 – 3.1V)

|                                    |      |
|------------------------------------|------|
| Battery UVLO Threshold(Vbatt_UVLO) | 2.8V |
|                                    | 2.7V |
|                                    | 2.8V |
|                                    | 2.9V |
|                                    | 3.0V |
|                                    | 3.1V |

5. Set Charge Terminal Current to 52mA (the range is 24 – 108mA)

|                         |       |
|-------------------------|-------|
| Terminal Current(ITERM) | 52mA  |
|                         | 24mA  |
|                         | 52mA  |
|                         | 80mA  |
|                         | 108mA |

6. Set Battery Regulation Voltage to 4.200V (the range is 3.6 - 4.545V)

|                                       |        |
|---------------------------------------|--------|
| Battery Regulation Voltage(Vbatt_REG) | 4.200V |
|                                       | 4.200V |
|                                       | 4.215V |
|                                       | 4.230V |
|                                       | 4.245V |
|                                       | 4.260V |
|                                       | 4.275V |
|                                       | 4.290V |
|                                       | 4.305V |
|                                       | 4.320V |
|                                       | 4.335V |
|                                       | 4.350V |

7. Set Pre - Charge to Fast Charge Threshold Voltage to 3.0 V (the range is 2.8 – 3.0V)

|                                      |      |
|--------------------------------------|------|
| Pre Charge to Fast Charge(Vbatt_PRE) | 3.0V |
|                                      | 2.8V |
|                                      | 3.0V |

8. Set Battery Auto-recharge Voltage to  $V_{BATT\_REG} - 300mV$  (the range is 150mV or 300mV)

|                                   |                 |
|-----------------------------------|-----------------|
| Battery Recharge Threshold(VRECH) | Vbatt_REG-300mV |
|                                   | Vbatt_REG-150mV |
|                                   | Vbatt_REG-300mV |

9. Set Battery Discharge Current Limit to 1000mA (the range is 100mA to 1600mA):

|                                 |        |
|---------------------------------|--------|
| Discharge Current Limit(IDSCHG) | 1000mA |
|                                 | 1000mA |
|                                 | 1100mA |
|                                 | 1200mA |
|                                 | 1300mA |
|                                 | 1400mA |

10. Termination Function Select

|                                             |                                   |
|---------------------------------------------|-----------------------------------|
| <input checked="" type="checkbox"/> EN_TERM | <input type="checkbox"/> TERM_TMR |
|---------------------------------------------|-----------------------------------|

**Table 1 Termination Function Selection Table**

| EN_TERM                             | TERM_TMR                            | After I <sub>BATT</sub> hit I <sub>TERM</sub> in CV mode |               |
|-------------------------------------|-------------------------------------|----------------------------------------------------------|---------------|
|                                     |                                     | Operation                                                | Charge Status |
| <input type="checkbox"/>            | x                                   | Keep CV Charge                                           | Charge        |
| <input checked="" type="checkbox"/> | <input type="checkbox"/>            | Charge Done                                              | Charge Done   |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Keep CV Charge                                           | Charge Done   |

## Others

### 1. FET Control:

**FET Control**

☐ LDO\_FET Off (EN\_HIZ)

☐ BATT\_FET Charge Off (CEB)

☐ EN\_Shipping Mode (FET\_DIS)

EN\_HIZ only controls the on/off of the LDO FET.

CEB only control the on/off of the Battery FET in charge mode.

FET\_DIS selected could turn off the Battery FET at both charge and discharge mode.

FET\_DIS unselected could not turn on Battery FET; pull INT to low by push button could turn on Battery FET when it's turned off by FET\_DIS.

### 2. Other Control.

**Other Control**

Thermal Regulation Threshold 120oC

☒ Enable NTC

### 3. Safety Timer Setting

☒ **Safety Timer Setting**

Fast Charge Timer 5hrs

☐ Enable 2X extened safety timer

### 4. I<sup>2</sup>C Watchdog Timer

**I2C Watchdog Timer**


Watchdog Disable Timer

☐ Watchdog AUTO Reset

Watchdog  
Reset

Rate  
04s

## 5. Resister Auto Monitor

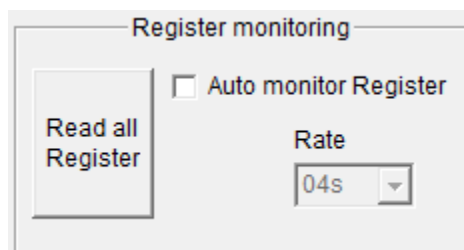

Register monitoring

☐ Auto monitor Register

Read all Register

Rate: 04s

## 6. Content of the Registers:

| Register                      |   |   |   |   |   |   |   |   |
|-------------------------------|---|---|---|---|---|---|---|---|
|                               | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Input Source Control (0X00)   | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 |
| Power_On Configuration (0X01) | 0 | 0 | R | R | 0 | 1 | 0 | 0 |
| Charge Current Control (0X02) | R | R | R | 0 | 0 | 1 | 1 | 1 |
| Discharge/ Termination (0X03) | R | 1 | 0 | 0 | 1 | R | 0 | 1 |
| Charge Voltage Control (0X04) | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |
| Timer Control (0X05)          | R | 1 | 0 | 0 | 1 | 0 | 1 | 0 |
| Miscellaneous Control (0X06)  | R | 0 | 0 | R | 1 | R | 1 | 1 |
| System Status(0X07)           | R | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Fault (0X08)                  | R | 0 | 0 | 0 | 0 | 0 | R | R |

## 7. Monitor the MP2667 operation status and Fault report

Fault Reporting

System Status Reporting

## ❖Notes❖

Please contact local FAE to apply:

1. The latest datasheet to get the other detailed description on the operation of this part
2. The “MP2667 Evaluation Kit” EXE file

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.