
Surface Mount Common Mode Choke

Schematic Diagram



Electrical Specifications at 25° C

Part Number	Winding OCL ±30% (mH)	DCR Max. (Ω)	Hi-Pot Min. V_{RMS}	Common Mode Attenuation Typ. (dB)				
				100k	500k	1M	5M	10M
F-172	4.7	1.0	1000	40	43	51	40	38

Operating Temperature Range: -40 °C to +85 °C

Designed and tested for reflow compatability.

100% incapsulated


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 44 pieces per tube

Tape & Reel Available

Physical Dimensions

inches (mm)

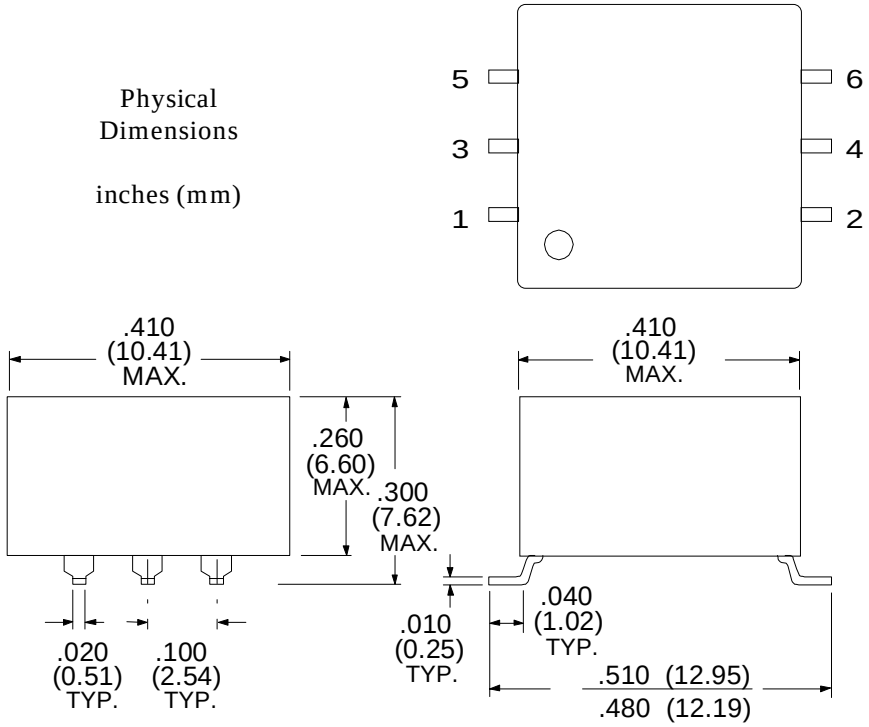

RHOMBUS P/N: F-172	
CUST P/N:	NAME:
DATE: 1/26/00	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com