
SIGNAL LINE FILTER
(1 COIL/2 LINES)

DATA LINE PROTECTION APPLICATIONS
FILTER COMMON AND DIFFERENTIAL MODE NOISE
EMI / RFI SUPPRESSION
FREQUENCY RANGE OF 1-100MHZ
DIL CONSTRUCTION FOR EASY INSTALLATION
HIGH CURRENT AND VOLTAGE ISOLATION


Electrical Specifications at 25°C

Part Number	Turns Ratio	OCL (µH min.)	L_L (µH max.)	DCR (mΩ)	Cw/w (pF max)	HI-POT V_{RMS}	I MAX. mA
F-2106	1:1	25	.2	100	15	500	100


TYPICAL ATTENUATION

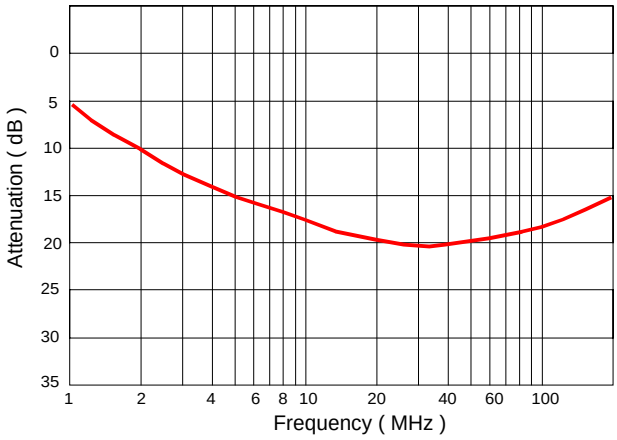


SCHEMATIC DIAGRAM

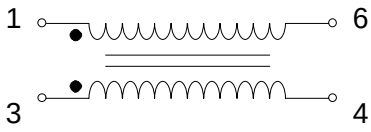

PHYSICAL DIMENSIONS
in inches (mm)

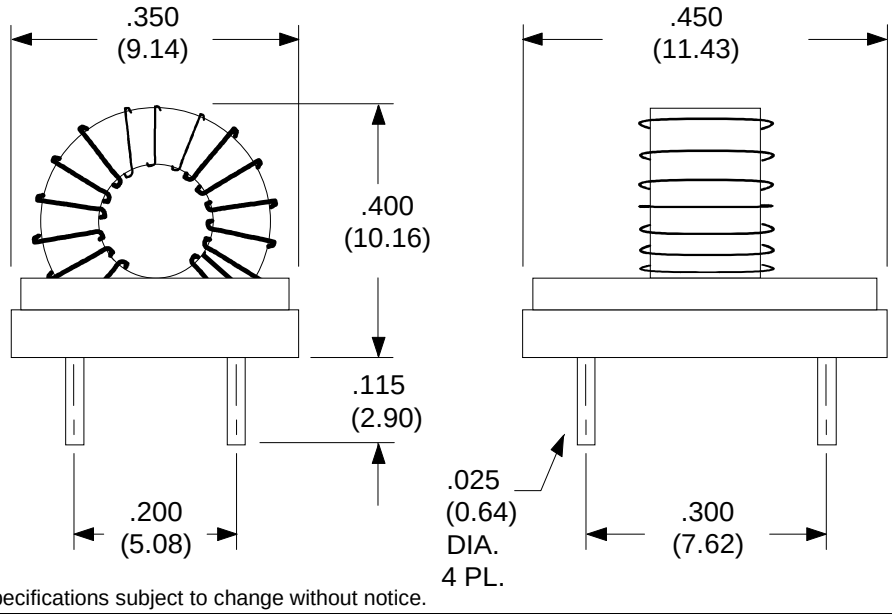

FOOT PRINT

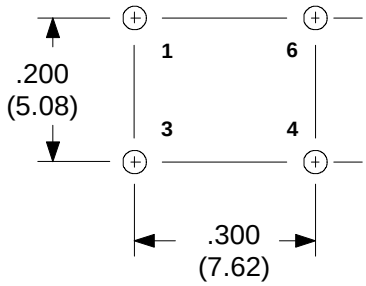

Specifications subject to change without notice.

F-2106 - 9/97

Rhombus Industries Inc.
Transformers & Magnetic Products

www.rhombus-ind.com

15801 Chemical Lane
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960
FAX: (714) 896-0971