molex
one company > a world of innovation

This document was generated on 04/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0191930281
Status: Active
Description: VersaKrimp™ Ring Tongue Terminal for 4 AWG Wire

Documents:
Drawing (PDF) RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR18689
UL	E32244

General

Product Family	Ring and Spade Terminals
Series	19193
Comments	Type I Noninsulated; Class 2
Crimp Quality Equipment	Yes
Mil-Spec	AS20659-145, MS20659-145
Product Name	VersaKrimp™
Type	Ring

Physical


Barrel Type	Closed - Brazed
Insulation	None
Material - Plating Mating	Tin
Packaging Type	Bag
Plating min: Mating (µin)	100
Plating min: Mating (µm)	2.5
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.5
Stud Size	1/2" (M12)
Termination Interface: Style	Crimp or Compression
Wire Size AWG	4

Material Info

Old Part Number	F-369-12

Reference - Drawing Numbers

Sales Drawing	SD-19193-006



Series image - Reference only

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
19193Series

Application Tooling | **FAQ**

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Putt Pump Dieless Head System	0192860065
Manual Putt Pump Hydraulic System, Die set required	0192860117
Die Set (large) for the HHLS Hydralic Crimper	0192900007
Hand Crimp Tool	0640013900

This document was generated on 04/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

SD006


Doc.# SD-19193-006

Customer Dwg:

MATERIAL: Copper
PLATING: Electro-Tin
STUD SIZE: "D" ±.005

10 - .198
14 - .265
56 - .328
38 - .390
76 - .453
12 - .515
58 - .656
34 - .781
209 = .209
413 = .413

VERSAKRIMP

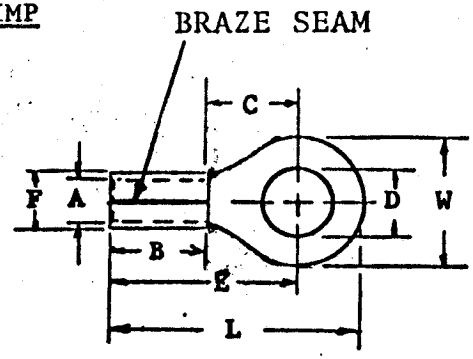

Customer Dimensions

Part No.	Wire Size	"W"	"C" Min	"E" Max	"B" Min	"L" Max	"A" Min	Stock (A) Thkns.	"F" Max	AVAILABLE STUD SIZE
F-366-	#4	.652 / .678	.520	1.028	.425	1.385	.280	REF. .075	.470	209,413 10, 14, 56, 38, 76, 12,
F-367-	#4	.465 / .485	.520	1.028	.425	1.288	.280	REF. .075	.470	10, 14, 56
F-369-	#4	.875 / .895	.989	1.497	.425	1.970	.280	REF. .075	.470	14, 56, 38, 76, 12, 58
F-370-	#4	1.250 / 1.270	.989	1.497	.425	2.158	.280	REF. .075	.470	14, 56, 38, 76, 12, 58,34

For parts to be on tape add "T" at end of part number.

ETC molex INCORPORATED

TITLE: "F" RING TONGUE TERMINAL

DIMENSIONAL TOLERANCE UNLESS OTHERWISE SPECIFIED

FRAC.	DEC.	ANG.
±	±	±

REVISION		
A	ETC 50245 11/7 Rev	

SCALE: NONE
DRWN. BY: LEM
CHKD. BY:
APPRD. BY:
DRAWING NO.:
DATE: 3/2/70