
F6406/G

LINEAR INTEGRATED CIRCUIT

2-PHASE DC-FAN MOTOR PRE-DRIVER IC



SOP-8

Lead-free: F6406L/F6406P
Halogen-free: F6406GL/F6406GP

■ DESCRIPTION

The UTC **F6406/G** is a 2-phase pre-driver IC for dc-fan motors, providing the functions of motor lock protection, auto-restart, and rotation detection signal output. UTC **F6406** is with RD option and UTC **F6406G** with FG.

■ FEATURES

* Wide supply voltage range of 2.5V to 30V
* Lock protection
* Auto-restart when the motor lock is undone
* RD(latch-type lockup detection) output (F6406)
* FG(frequency generator) output (F6406G)


■ ORDERING INFORMATION

Ordering Number			Package	Packing
Normal	Lead Free	Halogen Free		
F6406-S08-R	F6406L-S08-R	F6406P-S08-R	SOP-8	Tape Reel
F6406G-S08-R	F6406GL-S08-R	F6406GP-S08-R	SOP-8	Tape Reel


F6406L-S08-R (1)Packing Type (2)Package Type (3)Lead Plating	(1) R: Tape Reel (2) S08: SOP-8 (3) P: Halogen Free, L: Lead Free, Blank: Pb/Sn

Copyright © 2010 Unisonic Technologies Co., Ltd

■ PIN CONFIGURATION

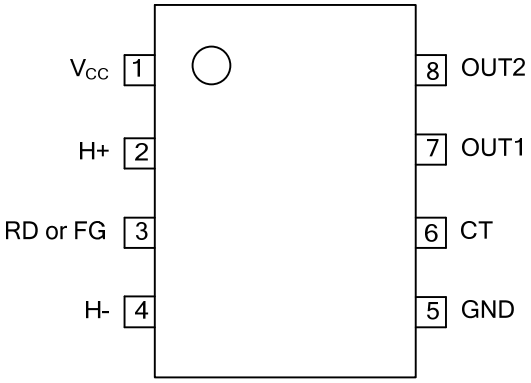

■ BLOCK DIAGRAM

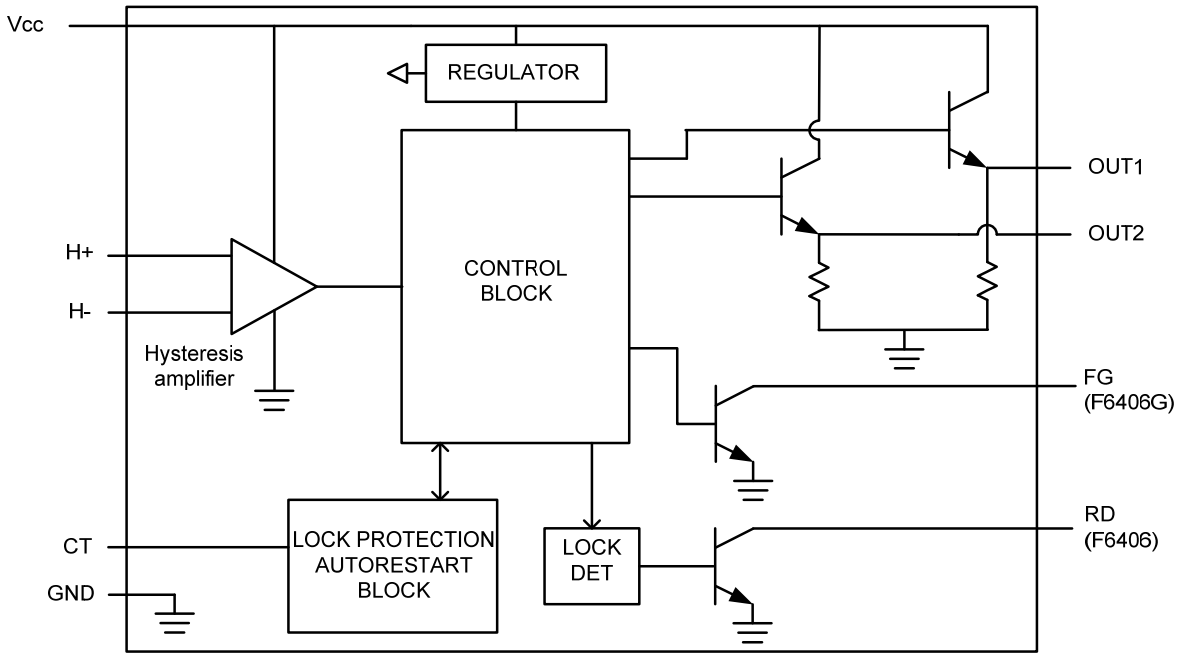

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	2.5V ~ 30V	V
Hall Input Common Mode Voltage Range	V_{HIC}	1.0 ~ Vcc-0.5	V
Circuit Current	I_{OUT}	80	mA
Power Dissipation	P_D	700	mW
Operating Ambient Temperature	T_{OPR}	-20 ~ +85	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V_{CC}=12V)


PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Current Drain	I_{CC}	In drive mode	CT=L		3.2	8.7	mA
			CT=H		3.2	5	mA
Lockup Detection Capacitor Charge Current	I_{CT1}	V_{CT}= 1.1V		2	3.45	5.25	μA
Capacitor Discharge Current	I_{CT2}	V_{CT}= 1.1V		0.35	0.8	1.45	μA
Charge/Discharge Ratio	R_{CT}	$R_{CD}=I_{CT1}/I_{CT2}$		3	4.5	8	
CT Charge Voltage	V_{CT1}			2.2	2.6	3	V
CT Discharge Voltage	V_{CT2}			0.4	0.6	0.8	V
Output High Level Voltage	V_{OL}	I_{OUT}= 10 mA		10	10.5		V
Hall Input Sensitivity	VHin	Zero peak value (including offset and hysteresis)		3		15	mV
RD Output Pin Low Voltage (F6406)	V_{RDL}	I_{RD}=5mA			0.1	0.3	V
RD Current Capacity (F6406)	I_{RD}	V_{RDL}=2V		20			mA
FG Low Voltage (F6406G)	V_{FGL}	I_{FG}=5mA			0.1	0.3	V
FG Driver Capacity (F6406G)	I_{FG}	V_{FGL}=2V		20			mA
FG Leakage Current (F6406G)	I_{FGL}	V_{FGL}=15V				50	μA

■ TYPICAL APPLICATION CIRCUIT(F6406)

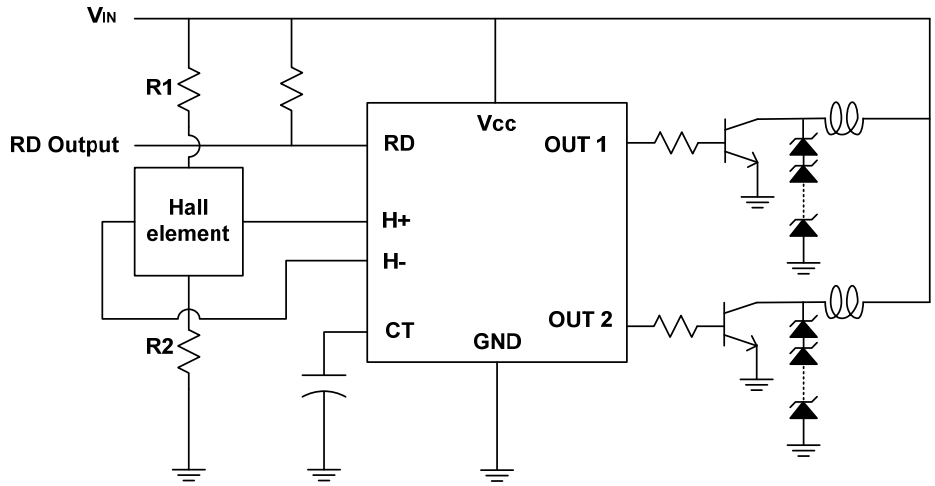

*Same value of hall bias resistors is selected for R1 and R2

■ LOCKUP PROTECTION / AUTOMATIC RECOVERY

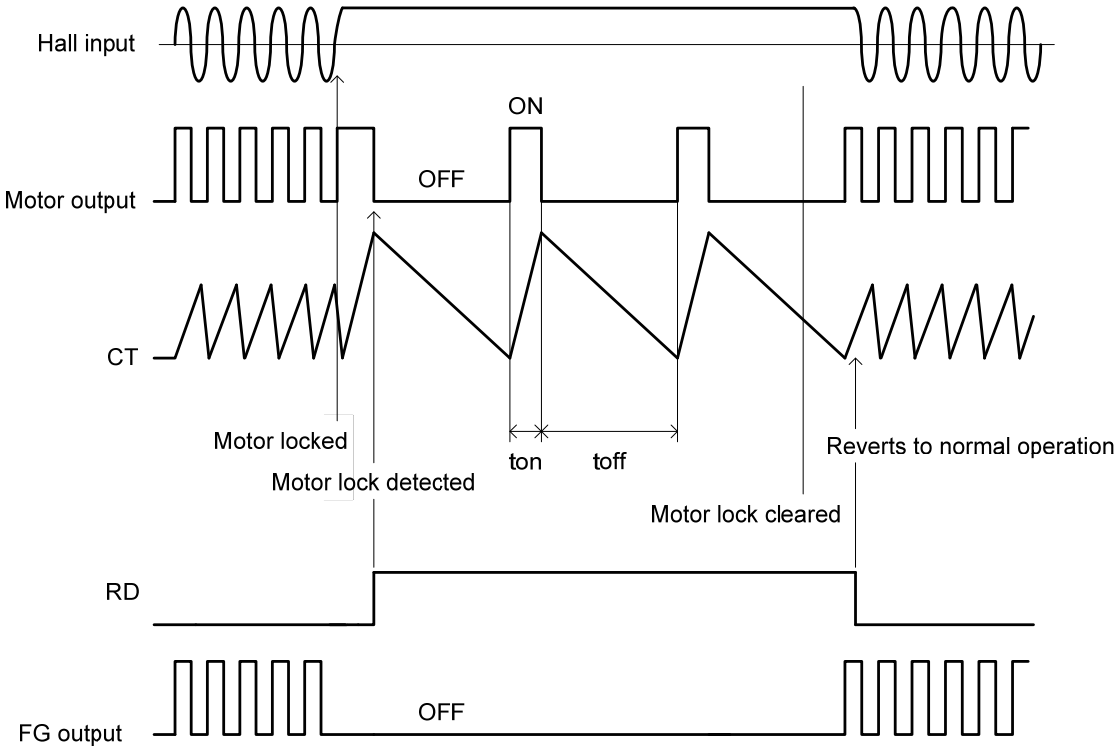

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.