Type: FB-7LG

◆ Product Description




- 8.3×8.3mm Max.(L×W), 9.0mm Max. Height.
- Operating frequency:250kHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

◆ Feature


- Variable shielded type.
- Two capacitors can be internally mounted in one section.
- Ideally used as Audio Filters(LPF, BPF, Delay Line)
- RoHS Compliance

◆ Dimensions (mm)

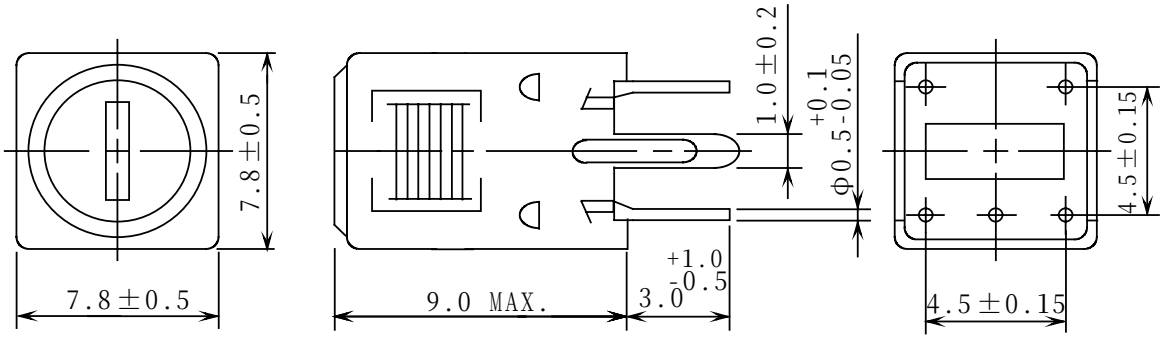

＊ Dimension does not include solder used on coil.
＊ Pin pitch should be measured at the root of terminal.

◆ Testing Circuit

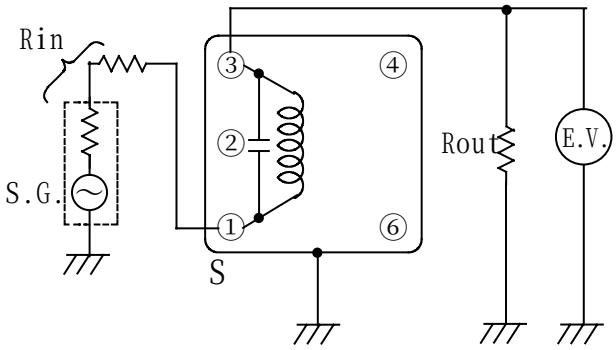

R in=Rg+R1=600Ω


R out=600Ω

Type: FB-7LG

◆ Specification (part number: 5326-T039)

Item		Specification
Input impedance	(R in)	600Ω
Output impedance	(Rout)	600Ω
Attenuation	31.5KHz	MIN.22dB

Frequency Response (Attenuation 0dB at 1KHz)

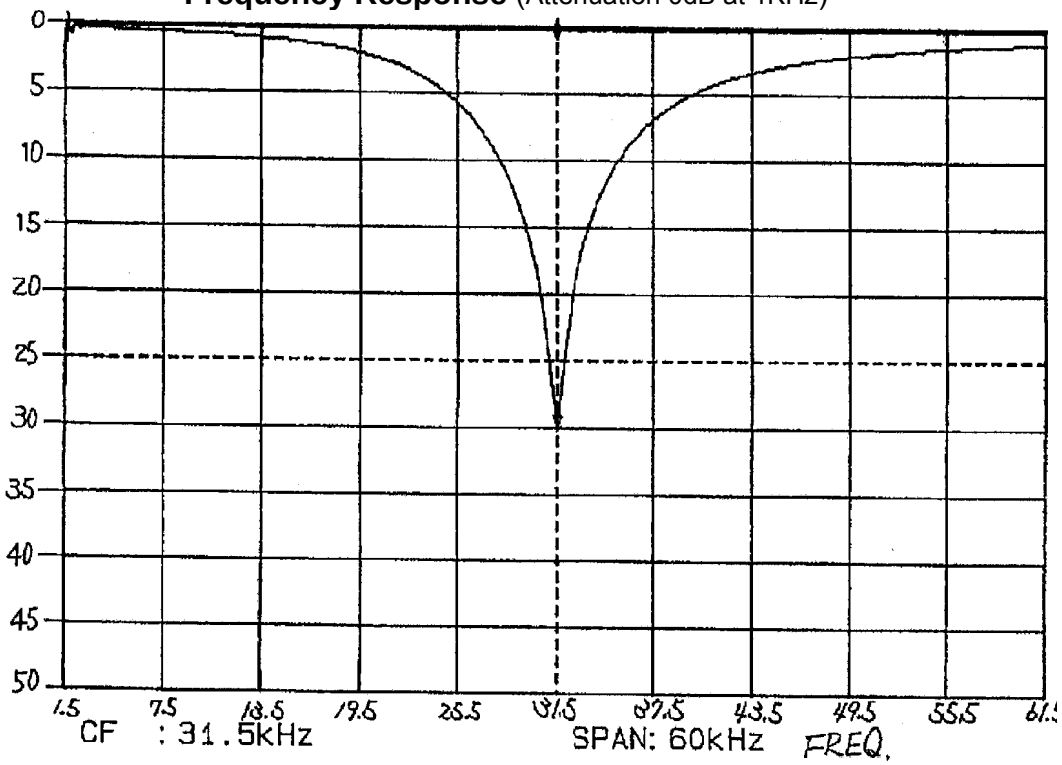

FREQ. (KHz)