
FB1000..... FB1010
FB1000L FB1010L

10 Amp. Glass Passivated Bridge Rectifier

Dimensions in mm.

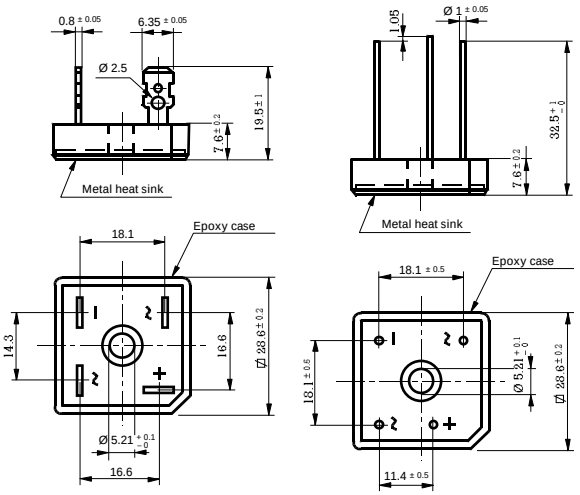

Voltage
50 to 1000 V

Current
10 A

HYPERECTIFIER®

- Glass Passivated Junction
- UL recognized under component index file number E130180
- Terminals: FASTON ①
- Terminals: WIRE LEADS ②
- Max. Mounting Torque: 25 Kg x cm

Lead and polarity identifications

High surge current capability

Maximum Ratings, according to IEC publication No. 134


		①	FB1000	FB1001	FB1002	FB1004	FB1006	FB1008	FB1010
		②	FB1000L	FB1001L	FB1002L	FB1004L	FB1006L	FB1008L	FB1010L
V_{RRM}	Peak Recurrent ReverseVoltage (V)		50	100	200	400	600	800	1000
V_{RMS}	Maximum RMS Voltage (V)		35	70	140	280	420	560	700
V_R	Recommended Input Voltage (V)		20	40	80	125	250	380	500
$I_{F(AV)}$	Max. forward current R-load: At T case = 55 °C At T case = 90 °C With Al Square Chassis (200 cm^2 x 3 mm.) Tamb = 45 °C		10 A 7.5 A 5 A						
I_{FRM}	Recurrent peak forward current		50 A						
I_{FSM}	10 ms. peak forward current		200 A						
I^2t	I^2t value for fusing (t = 10 ms)		200 A^2sec						
T_j	Operating temperature range		– 55 to + 150 °C						
T_{stg}	Storage temperature range		– 55 to + 150 °C						

Electrical Characteristics at Tamb = 25 °C

V_F	Max. forward voltage drop per element at I_F = 5 A	1.1 V
I_R	Max. reverse current per element at V_{RRM} d.c.	5 µ A
R_{thj-c}	Typical thermal resistance junction to case	2 °C/W
	Isolation voltage from case to leads	2500 Vac

Characteristic Curves

TYPICAL FORWARD CHARACTERISTIC

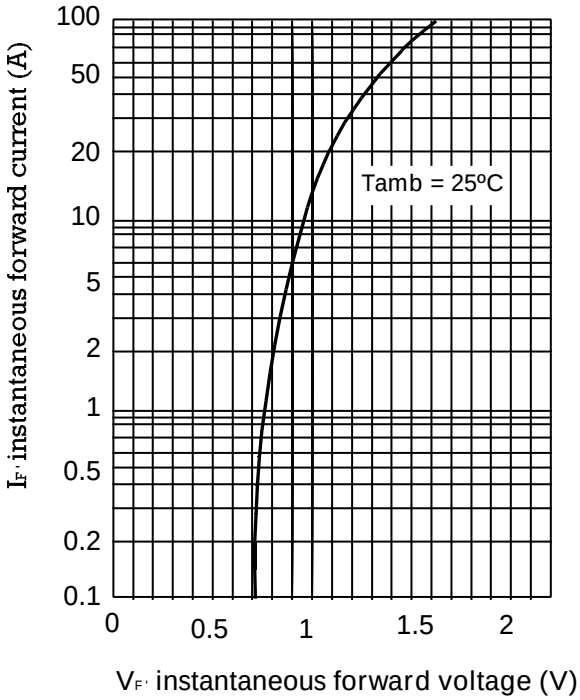

MAXIMUM NON-REPETITIVE
PEAK FORWARD SURGE CURRENT

