




FCS-5065 2MP 2MP: 1

Zoom Network Camera, 5-Megapixel, Outdoor, PoE 802.3af, Day & Night, IR LEDs, 12x, WDR

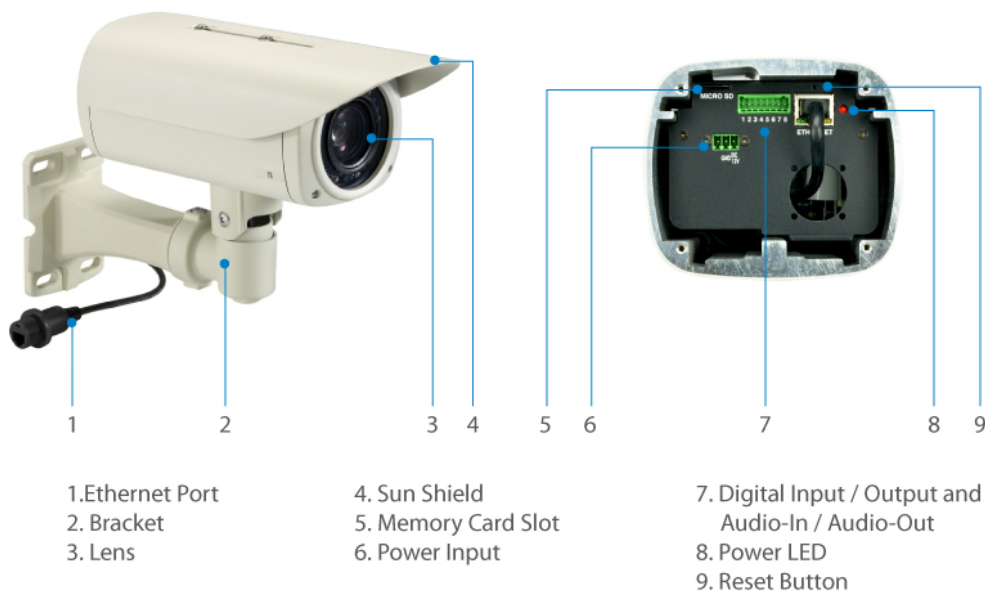

Key Features

- 2MP 2MP Micro SDHC/SDXC 2MP
- 5-Megapixel (2592 x 1944) 2MP
- 2MP 2MP 2MP (-40°C to 50°C) 2MP 2MP 2MP IP67-2MP
- 2MP 2MP 2MP 2MP WDR (2MP 2MP 2MP) 2MP
- Supports 12x optical zoom
- Vandal-proof IK10-rated housing
- 2MP 40 m 2MP 2MP 2MP 2MP LED
- 2MP: H.264/MJPEG
- 2MP 2MP 2MP 2MP IR-2MP
- 2MP 2MP 2MP: 12VDC/PoE (IEEE 802.3af)
- 2MP 64-2MP 2MP 2MP (OneSecure App 2MP)



System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

5-Megapixel 1/3" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE Port

1 x Line In

1 x Line Out

1 x Power terminal block

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Zoom, DC iris, Auto focus, f5.2-62.4mm, F1.8-3.0

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

27 Adaptive IR LEDs for illumination up to 40m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

48.4° ~ 4.8°

Pan/Tilt/Zoom:

12x Optical Zoom, Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

5M (2592x1944)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 3 (IEEE802.3af) and DC 12V / 12W (built-in heater and IR on)

Power Input: DC 12V / 802.3af PoE

Features

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Basic WDR (74 dB)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Audio:

Streaming: 2-way audio

Input/Output: line input, line output

Performance**Data Transfer Rate:**

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320x240

Minimum illumination:

Color: 0.1 lux at F1.8

B/W: 0 lux (IR LED on)

Environment**Temperature (°C):**

Operating: -40°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications**Dimensions (W x D x H mm):**

122 x 240 x 101 mm

Weight (g):

2390 g

Enclosure:

Weather proof IP67-rated housing

Vandal proof IK10-rated

Others**Approval and Compliance:**


CE, FCC, ONVIF, IP67, IK10, NEMA 4X

Deployment:

Wall Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

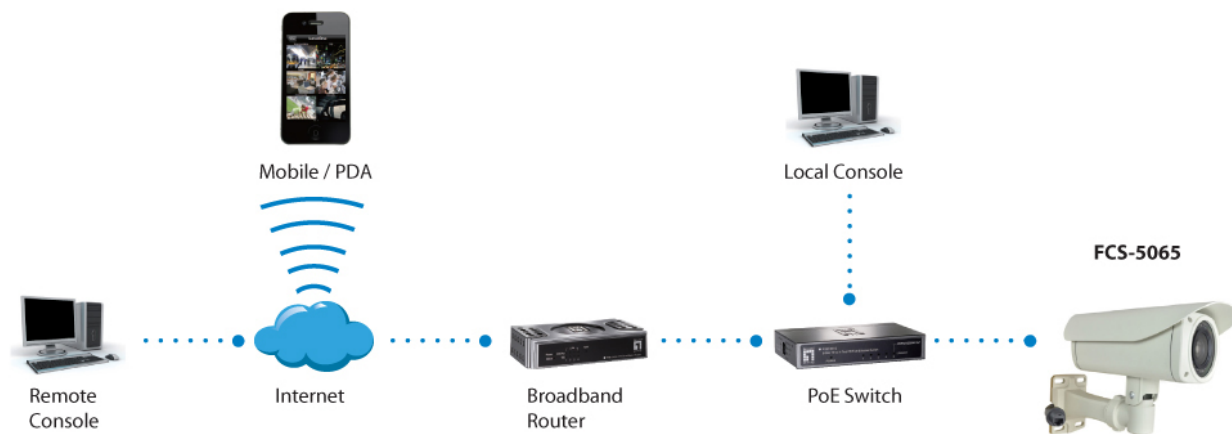

Order Information

FCS-5065

Package Contents

FCS-5065

Bracket

Mounting Kit

Screw Kit

Quick Installation Guide

Resource CD (User Manual, Utility, QIG)



CAS-2504

Pole Mount



CAS-3300

Ceiling Bracket

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.