

**Features:**

- Motor: AC Induction Motor
- Motor Protection: Thermal Protected
- Insulation Class F
- Bearing Type: Two Ball
- Connection: UL 1015 AWG 22, 400mm Wire Leads
- Rotor Material: Aluminum Alloy
- Impeller Material: Plastic UL94V-0
- Operating Temp:
Two Ball: -20°C~70°C
- Life Expectancy:
Two Ball: 70,000 Hours

**Fan-S Division**


pending



Model No.	Volt.	Freq.	Current	Power	Rated Speed	Maximum AirFlow		Maximum Static Pressure		Noise Level	Weight
	(VAC)	(Hz)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
FDA5-19072NBHW3F	115	50/60	0.70/0.60	72.0/70.0	2650/3000	6.80/7.79	240/275	1.299/2.008	33.0/51.0	70.0/73.0	1820
FDA5-19072QBHW3F	230	50/60	0.25/0.30	52.0/71.0	2800/3200	6.80/7.79	240/275	1.457/2.008	37.0/51.0	70.0/73.0	1820

Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

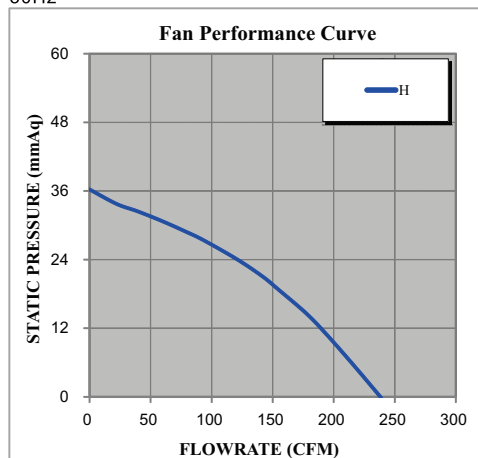

60Hz

