Inline Fuseholder, 5x20 / 6.3x32 mm

new

5x20 mm with wire leads, 8601.2001.08

5x20 mm, 8601.2000

6.3x32 mm, 8601.2005

32 VAC · 2.5 W / 6.3 A · 32 VDC

Description
- Inline Fuseholder

Applications
- Automotive applications/aftermarket
- Audio aftermarket
- Lighting aftermarket

References
General Product Information

Weblinks
Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

Technical Data

Shocksafe Category	PC2
Fuse-Link	5 x 20 or 6.3 x 32 mm
Mounting	In-line
Terminal	Wires
Rated Voltage	32 VAC , 32 VDC
Rated Current	6.3 A
Rated Power Acceptance IEC	2.5 W / 6.3 A @ Ta 23 °C
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to +85 °C
Material: Socket	Thermoplastic, UL 94V-0
Material: Terminals	Tin-Plated Brass
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Abmessungen

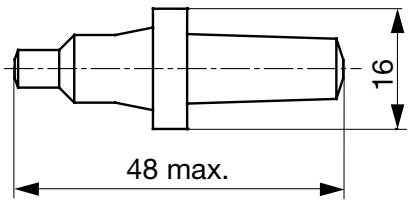

5x20 mm

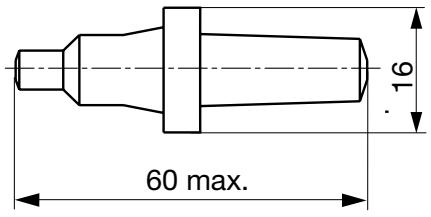

6.3x32 mm

Mounting Instruction

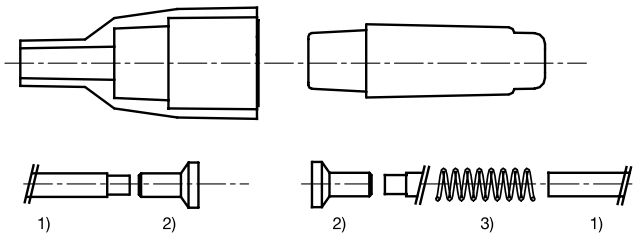

Variants

Holder	Fuse-Link	Wire	Colour Wire	Length [mm]	Order Number
●	5 x 20mm	-	-	-	8601.2000
●	5 x 20mm	18 AWG	dark pink	200	8601.2001.08
●	6.3 x 32mm	-	-	-	8601.2005
●	6.3 x 32mm	14 AWG	pink	200	8601.2005.08

Wire Length: 8"

Packaging Unit Bulk (50 pcs.)

SCHURTER ELECTRONIC COMPONENTS
The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.