ON Semiconductor®

FDPC4044

Common Drain N-Channel PowerTrench® MOSFET

30 V, 27 A, 4.3 mΩ

Features

- Max $r_{S1S2(on)}$ = 4.3 mΩ at V_{GS} = 10 V, I_{S1S2} = 27 A
- Max $r_{S1S2(on)}$ = 6.4 mΩ at V_{GS} = 4.5 V, I_{S1S2} = 23 A
- Pakage size/height: 3.3 x 3.3 x 0.8 mm
- Low inductance packaging shortens rise/fall times, resulting in lower switching losses
- MOSFET integration enables optimum layout for lower circuit inductance and reduced switch node ringing
- RoHS Compliant

General Description

This device is designed specifically as a single package solution for Li-Ion battery pack protection circuit and other ultra-portable applications. It features two common drain N-channel MOSFETs, which enables bidirectional current flow. FDPC4044 combines ON Semiconductor's advanced PowerTrench® process with state of the art packaging process to minimize the on-state resistance.

Applications

- Battery management
- Load switch
- Battery protection



Bottom

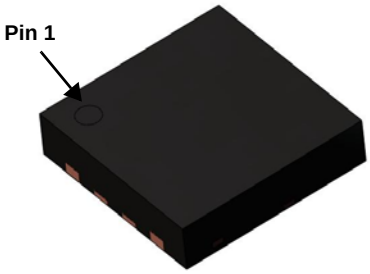

Top

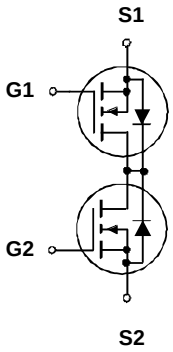

Power Clip 33

MOSFET Maximum Ratings T_A = 25 °C unless otherwise noted

Symbol	Parameter			Ratings	Units
V_{S1S2}	Source1 to Source2 Voltage			30	V
V_{GS}	Gate to Source Voltage		(Note 3)	±20	V
I_{S1S2}	Source1 to Source2 Current -Continuous	T_A = 25 °C	(Note 1a)	27	A
	-Pulsed		(Note 2)	120	
P_D	Power Dissipation	T_A = 25 °C	(Note 1a)	2.7	W
	Power Dissipation	T_A = 25 °C	(Note 1b)	1	
T_J, T_{STG}	Operating and Storage Junction Temperature Range			-55 to +150	°C

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	(Note 1a)	47	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	(Note 1b)	127	

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
40CF	FDPC4044	Power Clip 33	13 ”	12 mm	3000 units

©2013 Semiconductor Components Industries, LLC
August-2017, Rev.3

Publication Order Number:
FDPC4044/D

Electrical Characteristics T_J = 25 °C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
I_{S1S2}	Zero Gate Voltage Source1 to Source2 Current	V_{S1S2} = 24 V, V_{GS} = 0 V			1	μA
I_{GSS}	Gate to Source Leakage Current	V_{GS} = 20 V, V_{S1S2} = 0 V			100	nA
On Characteristics						
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{S1S2}, I_{S1S2} = 250 μA	1.2	1.5	3	V
$r_{S1S2(on)}$	Static Source1 to Source2 On Resistance	V_{GS} =10 V, I_{S1S2} = 27 A		3.2	4.3	mΩ
		V_{GS} = 4.5 V, I_{S1S2} = 23 A		4.6	6.4	
		V_{GS} = 10 V, I_{S1S2} = 27 A, T_J = 125 °C		4.5	7	
g_{FS}	Forward Transconductance	V_{S1S2} = 10 V, I_{S1S2} = 27 A		150		S
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{S1S2} = 15 V, V_{GS} = 0 V, f = 1 MHz		2295	3215	pF
C_{oss}	Output Capacitance			627	880	pF
C_{rss}	Reverse Transfer Capacitance			66	95	pF
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{S1S2} = 15 V, I_{S1S2} = 27 A, V_{GS} = 10 V, R_{GEN} = 6 Ω		8.5	17	ns
t_r	Rise Time			4.8	10	ns
$t_{d(off)}$	Turn-Off Delay Time			32	52	ns
t_f	Fall Time			5.2	10	ns
Q_g	Total Gate Charge	V_{S1S2} = 15 V, I_{S1S2} = 27 A, V_{G1S1} = 10 V, V_{G2S2} = 0 V		35	49	nC
Q_{gs}	Gate to Source1 Gate Charge			5.7		nC
Q_{gd}	Gate to Source2 “Miller” Charge			4.7		nC
Source1 to Source2 Diode Characteristics						
I_{fss}	Maximum Continuous Source1 to Source2 Diode Forward Current				1	A
V_{fss}	Source1 to Source2 Diode Forward Voltage	V_{G1S1} = 0 V, V_{G2S2} = 4.5 V, I_{fss} = 27 A (Note 2)		0.8	1.2	V

Notes:

1. $R_{\theta JA}$ is determined with the device mounted on a 1 in^2 pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a. 47 °C/W when mounted on a 1 in^2 pad of 2 oz copper.



b.127 °C/W when mounted on a minimum pad of 2 oz copper.

2. Pulse Test: Pulse Width < 300 us, Duty cycle < 2.0%.

3. As an N-ch device, the negative Vgs rating is for low duty cycle pulse ocurrence only. No continuous rating is implied.

Typical Characteristics T_J = 25 °C unless otherwise noted

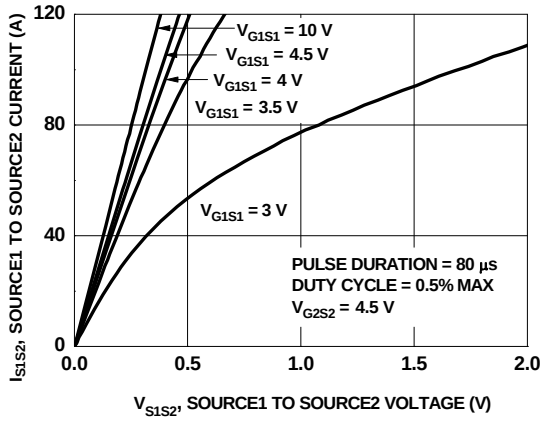

Figure 1. On-Region Characteristics

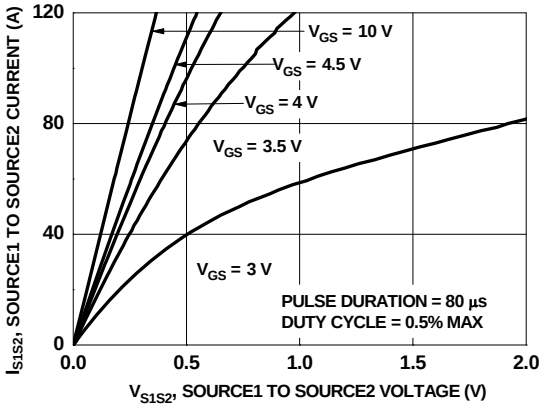

Figure 2. On-Region Characteristics

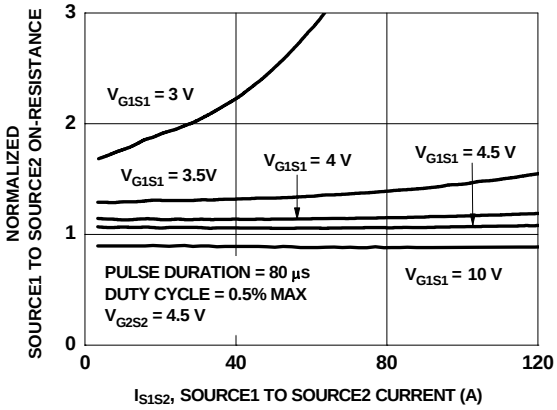

Figure 3. Normalized On-Resistance vs Source1 to Source2 Current and Gate Voltage

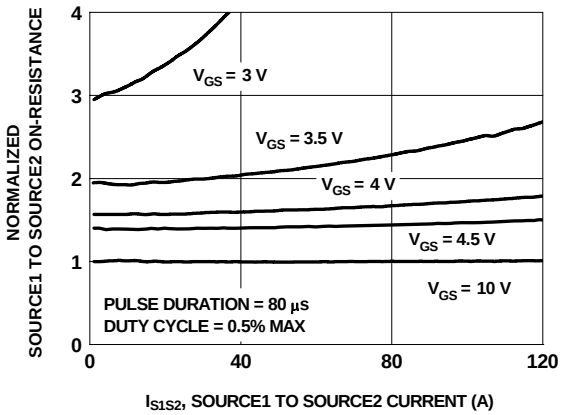

Figure 4. Normalized On-Resistance vs Source1 to Source2 Current and Gate Voltage

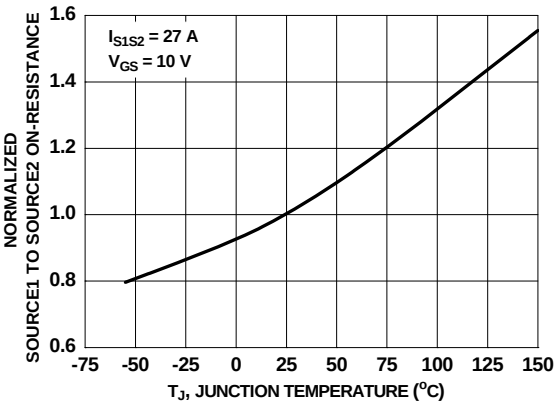

Figure 5. Normalized On-Resistance vs Junction Temperature

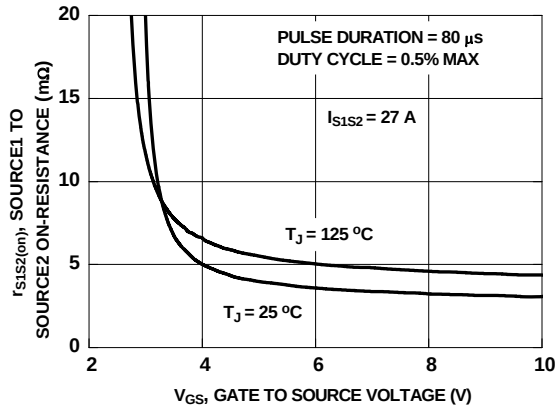

Figure 6. On-Resistance vs Gate to Source Voltage

Typical Characteristics T_J = 25 °C unless otherwise noted

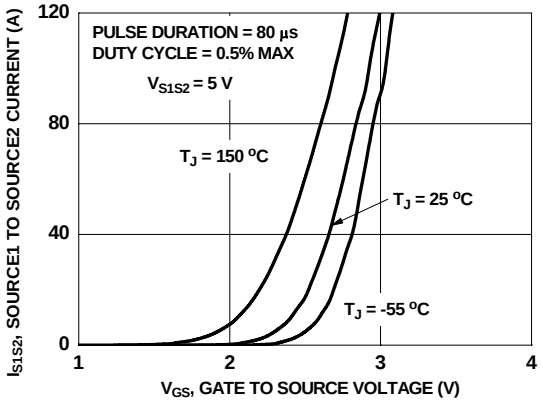

Figure 7. Transfer Characteristics

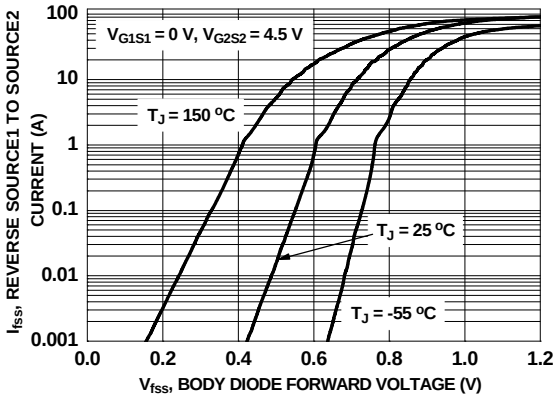

Figure 8. Source1 to Source2 Diode Forward Voltage vs Source Current

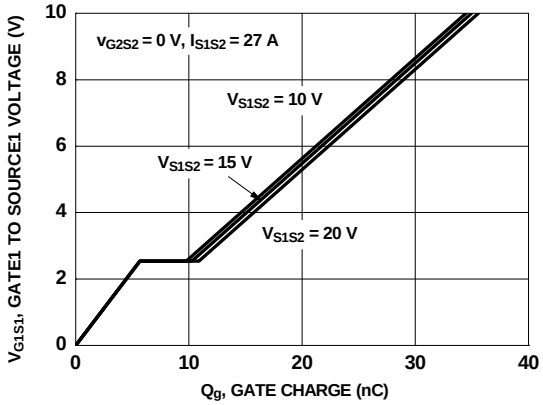

Figure 9. Gate Charge Characteristics

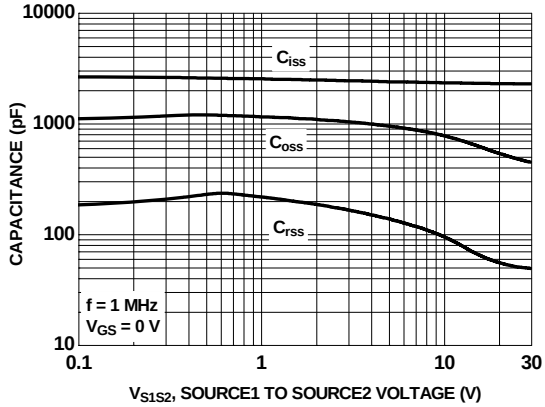

Figure 10. Capacitance vs Source1 to Source2 Voltage

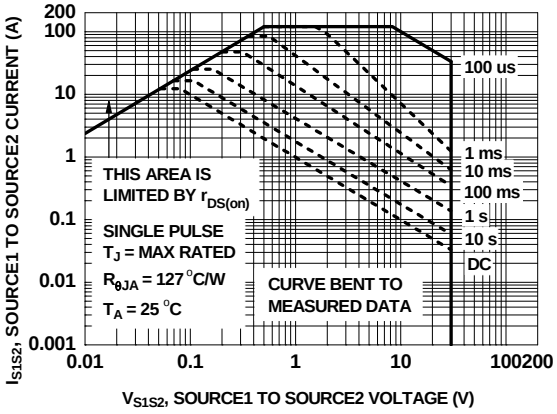

Figure 11. Forward Bias Safe Operating Area

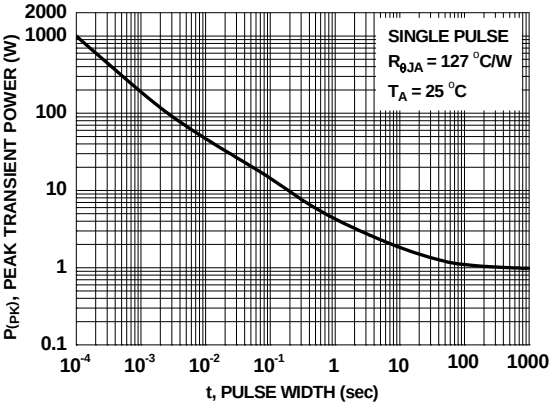

Figure 12. Single Pulse Maximum Power Dissipation

Typical Characteristics T_J = 25 °C unless otherwise noted

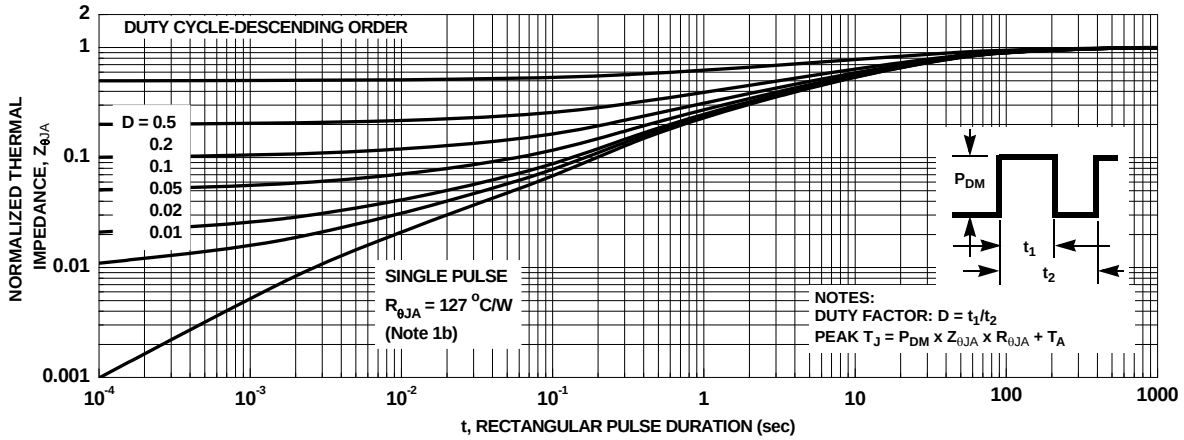

Figure 13. Junction-to-Ambient Transient Thermal Response Curve

Dimensional Outline and Pad Layout

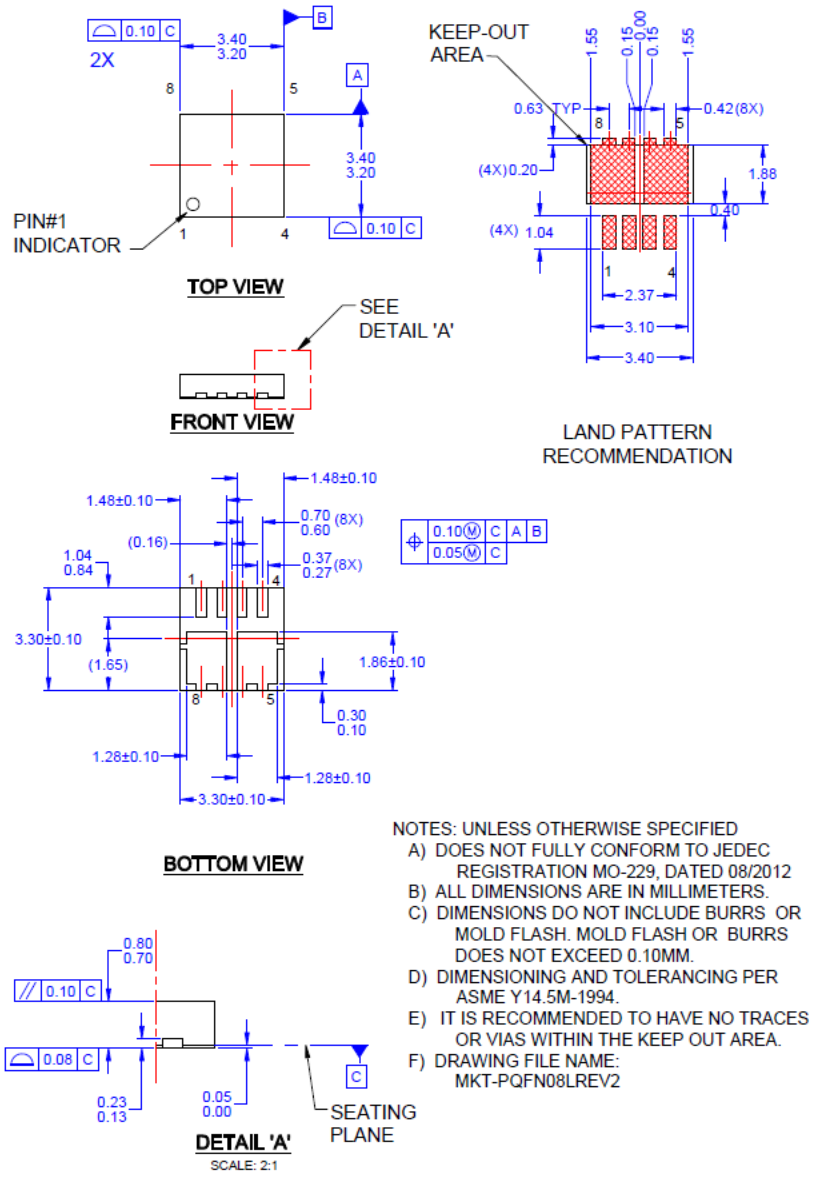

NOTES: UNLESS OTHERWISE SPECIFIED

A) DOES NOT FULLY CONFORM TO JEDEC REGISTRATION MO-229, DATED 08/2012
B) ALL DIMENSIONS ARE IN MILLIMETERS.
C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.
D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
E) IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.
F) DRAWING FILE NAME: MKT-PQFN08LREV2

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC