

(0.50 mm) .0197"

FJH-20-D-04.00-4

FJH-10-D-06.00-4

FJH SERIES

FLAT FLEXIBLE CABLE (FFC) JUMPER

SPECIFICATIONS

For complete specifications see www.samtec.com/FJH

Conductor:

Tin Plated Copper

Conductor

Resistance:

1000 Ω /km max

Insulation Resistance:

10 M Ω /km min

(conductor-to-conductor)

Dielectric Test:

400 VAC during 1 minute

(conductor-to-conductor)

Temperature Rating:

-30 °C to +80 °C

Voltage Rating:

60 VAC

Flame Resistance:

VW-1 (UL 758)

RoHS Compliant:

Yes

Mates with:

ZF5S

Double or
reversed ended

(0.50 mm)
.0197"
pitch

(4.00 mm)
.157"

FJH

NO. OF
POSITIONS

STYLE

OVERALL
LENGTHSTRIP
LENGTH


-10, -15, -20, -25,
-30, -40, -43, -50

-D
= Double End

-R
= Reversed
End

-“XX.XX”
= Specify
OVERALL LENGTH
in inches ($\pm 1/8$ inch)
(-D & -R = (50.80 mm) 2.00"
minimum)

-4
= (4.00 mm)
.157"

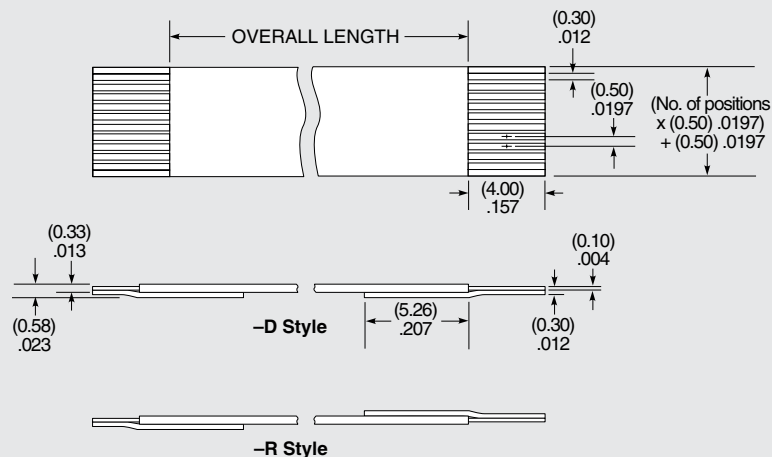

Note: Stiffener color will be blue or black at Samtec's discretion.

Note: Some sizes, styles and options are non-standard, non-returnable.