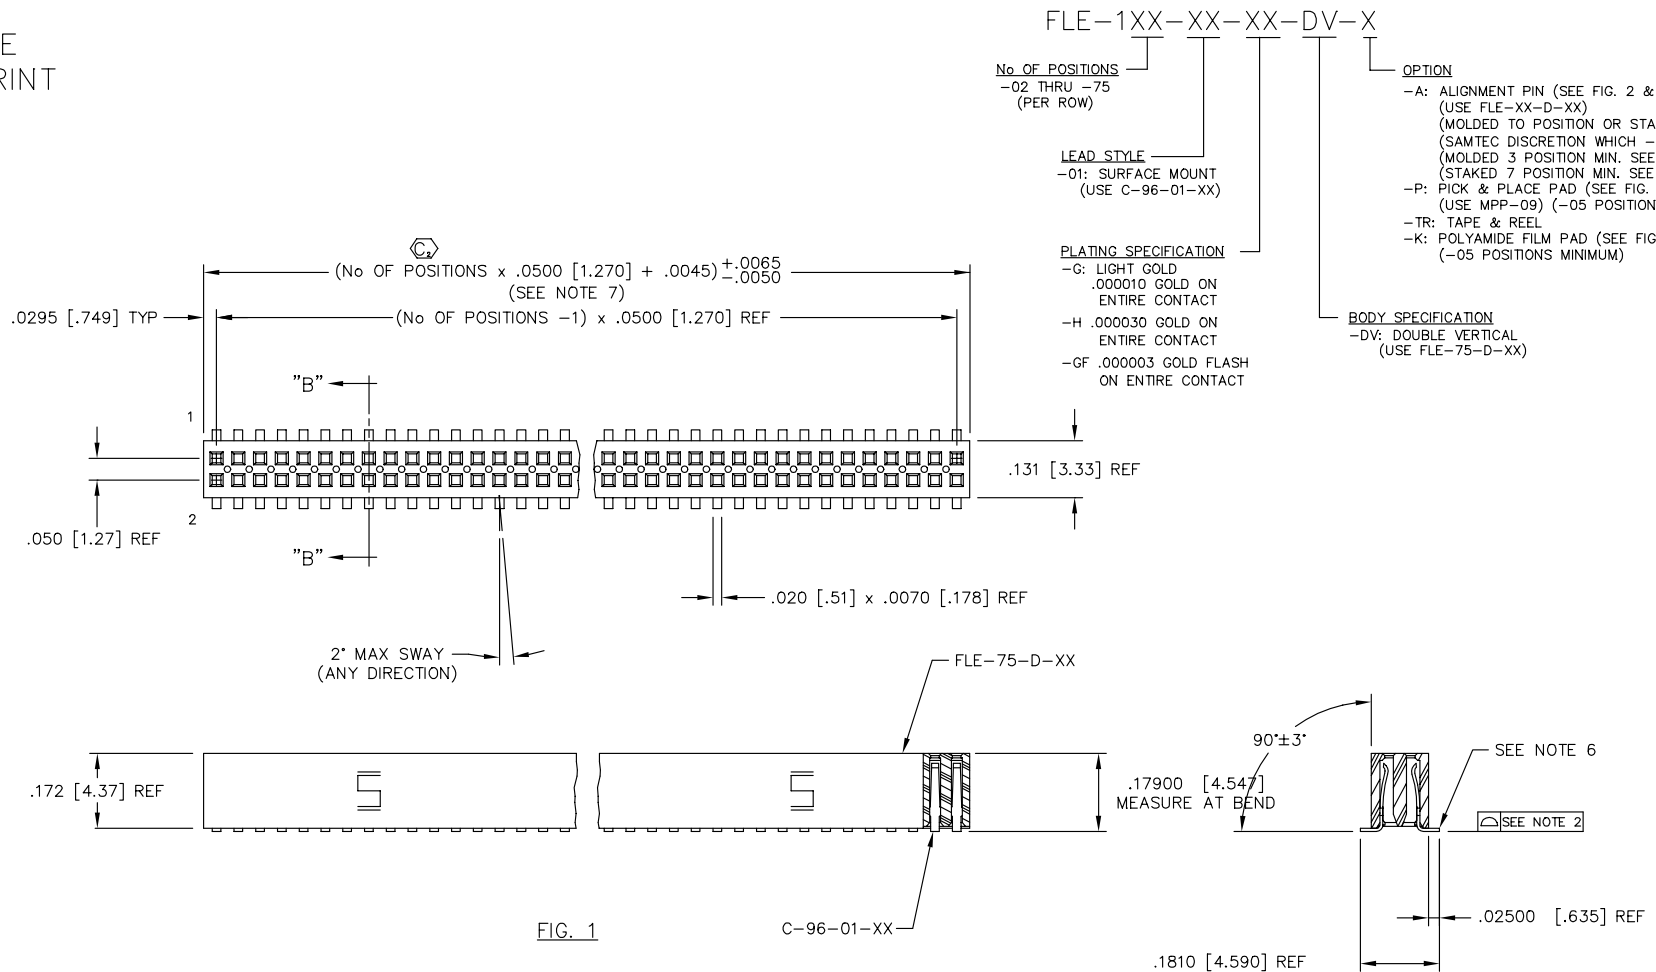


REV. V

DO NOT SCALE  
FROM THIS PRINT

## NOTES:

1. MINIMUM PUSHOUT FORCE: .5 lb.
2. COPLANARITY; POS -5 THRU -26: .004  
POS -27 THRU -75: .006
3. (C) REPRESENTS A CRITICAL DIMENSION.
4. PACKAGE POSITIONS -05 THRU -75 IN TUBES; LAYER  
PACKAGE POSITIONS -02 THRU -04.
5. FOR EVERY FINISHED PART, ONE POSITION WILL BE LOST  
WHEN CUTTING BODY TO LENGTH.
6. BURR ALLOWANCE: .003 [.08] MAX.
7. CUT FLASH TO BE .010 [.25] MAX WITH NO FLASH  
ALLOWED IN HOLES OR EXTENDING BELOW LEADS.

## PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION  
CONFIDENTIAL AND PROPRIETARY TO  
SAMTEC INC. AND SHALL NOT BE  
REPRODUCED OR TRANSFERRED TO  
OTHER DOCUMENTS OR DISCLOSED TO  
OTHERS OR USED FOR ANY PURPOSE  
OTHER THAN THAT FOR WHICH IT WAS  
OBTAINED WITHOUT THE EXPRESSED  
WRITTEN CONSENT OF SAMTEC INC.

PLOT SCALE: .175/ DIMSCALE: .200

MSC/MKTG  
FLE-MKT

# samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MADE BY:

D PURVIS 11-05-96

FLE-1XX-XX-XX-DV-X

SHEET 1 OF 2