

2-stage filter for 3-phase systems with neutral conductor

new



#### Description

- Terminals for three phases, neutral conductor and ground
- Very high symmetrical and asymmetrical attenuation loss
- In the frequency range from 10kHz up to 300MHz

#### Standards

- IEC 60939
- UL 1283, Edition 5, CSA 22.2 No. 8-M1986, @ Ta 75 °C

#### Approvals

- VDE License Number: pending
- UL License Number: E72928

#### Applications

- Voltage rating 520 VAC for world wide acceptance
- Protection against interference voltage from the mains
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters

#### References

[General Product Information](#)

#### Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Distributor-Stock-Check](#)


#### Technical Data

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Rated Current                   | 8 - 200 A                                                                                                               |
| Rated voltage                   | 300/520 VAC, 50/60 Hz                                                                                                   |
| Approval for                    | 8 - 200 A @ 50 (75) °C / 300/520 VAC;<br>50/60 Hz                                                                       |
| Overload Current                | 1.5 x I <sub>r</sub>                                                                                                    |
| Dielectric Strength for 520 VAC | 2.25 kVDC between L-L<br>1.7 kVDC between L-N<br>2.75 kVDC between L-PE<br>2.75 kVDC between N-PE<br>Test voltage 2 sec |
| Number of Filter Stages         | 2                                                                                                                       |
| Weight                          | 1.1 - 8.6 kg                                                                                                            |
| Material: Housing               | Metal                                                                                                                   |
| Sealing Compound                | UL 94V-0                                                                                                                |

|                            |                                                                   |
|----------------------------|-------------------------------------------------------------------|
| Mounting                   | Screw-on mounting on chassis                                      |
| Terminal                   | Screw Clamp                                                       |
| Operating Temperature [°C] | -25 °C to 100 °C                                                  |
| Climatic Category          | 25/100/21 acc. to IEC 60068-1                                     |
| Degree of Protection       | IP 20 acc. to IEC 60529                                           |
| Protection Class           | Suitable for appliances with protection class 1 acc. to IEC 61140 |
| MTBF                       | > 200'000 h acc. to MIL-HB-217 F                                  |


### Dimensions

#### Case 2A

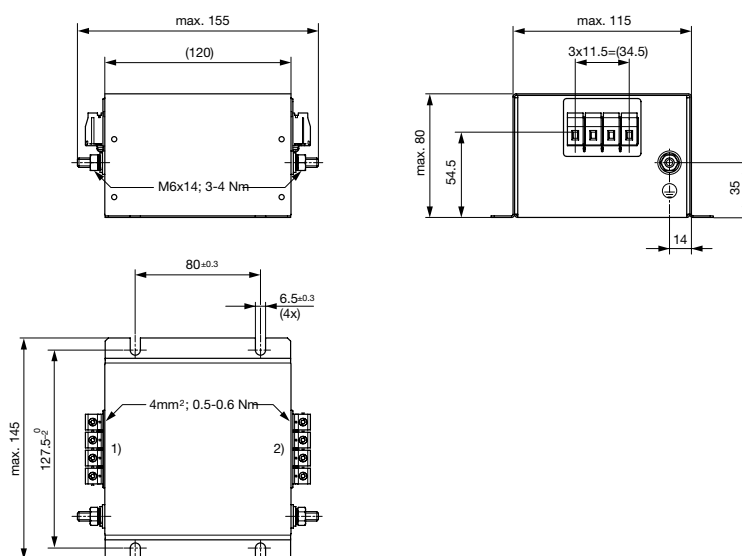


- 1) Line
- 2) Load

#### Case 2B

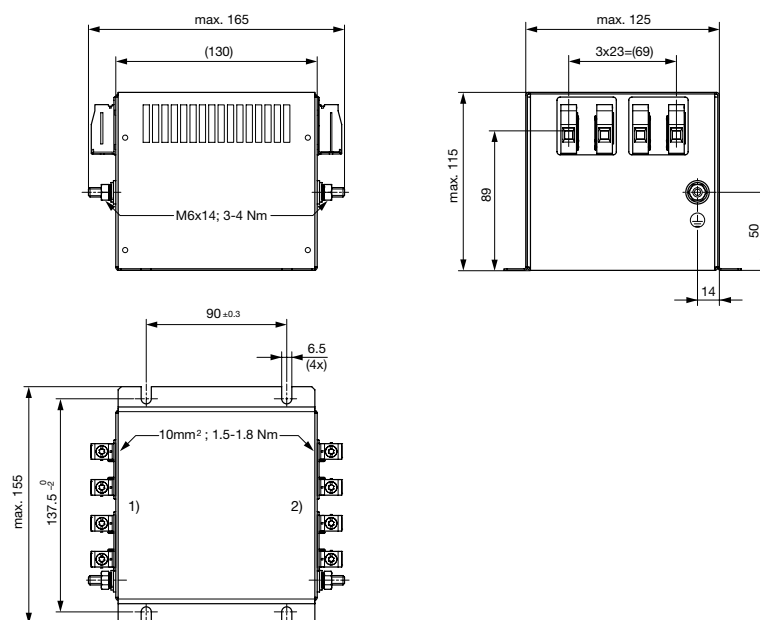

- 1) Line
- 2) Load


Case 2C

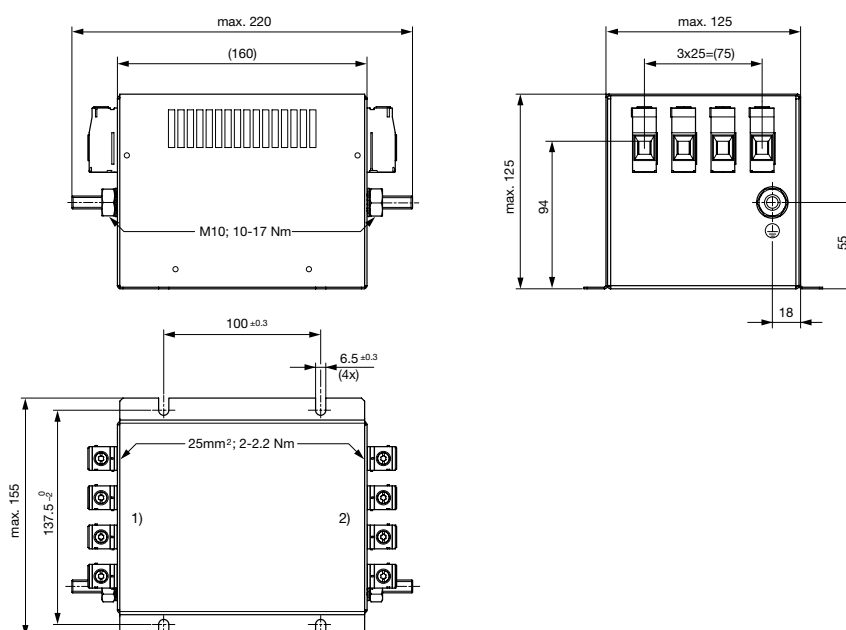

1) Line

2) Load


Case 2D

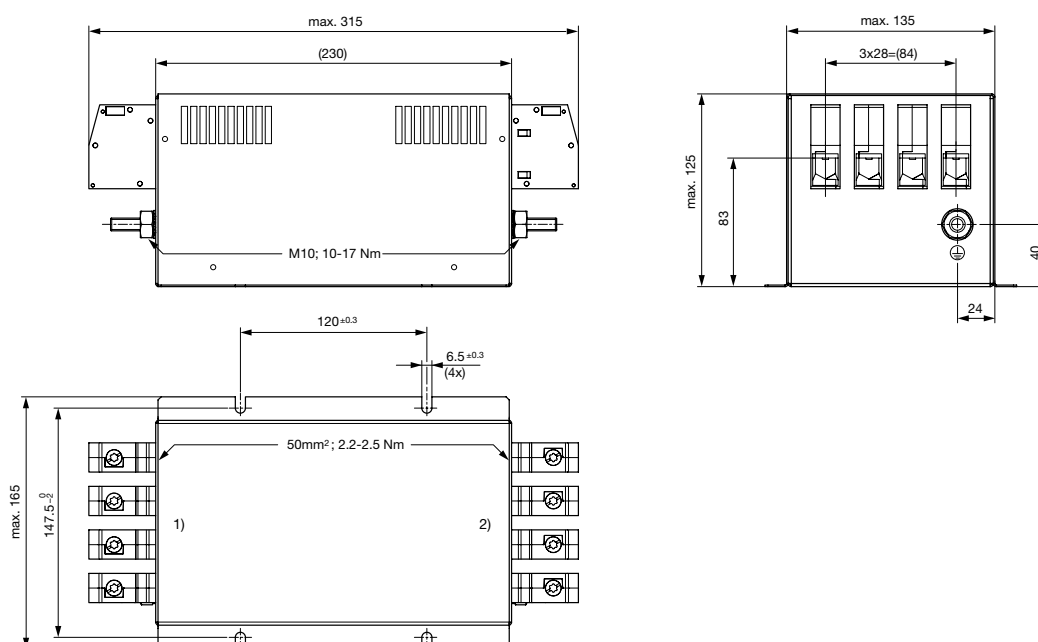

1) Line


2) Load

### Case 2E

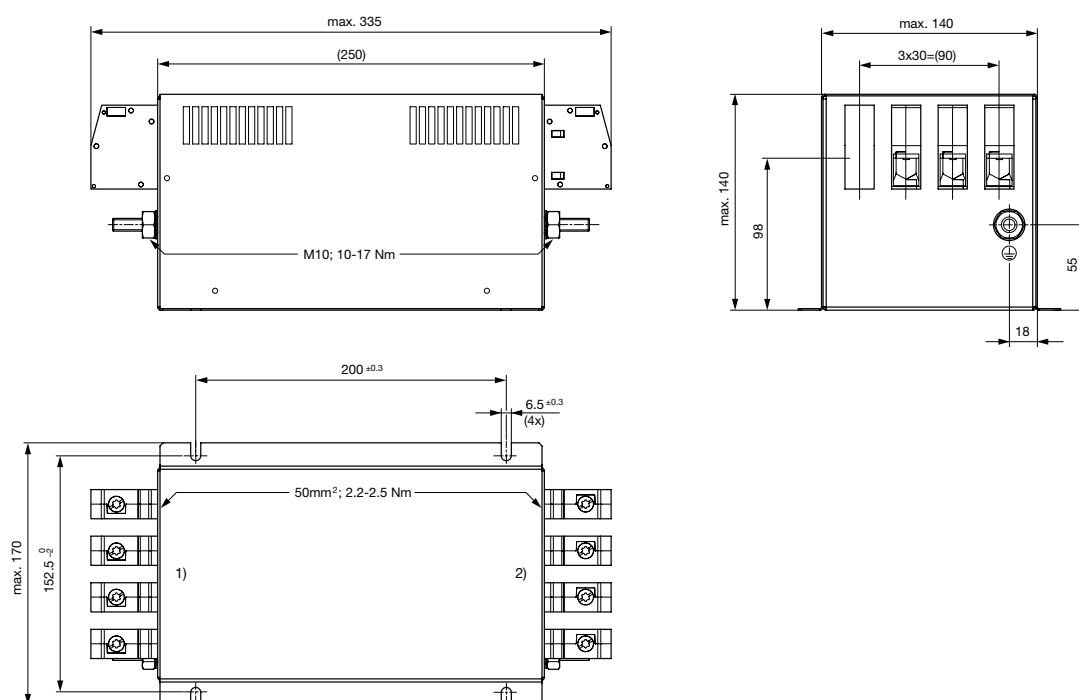

- 1) Line
- 2) Load

### Case 2F

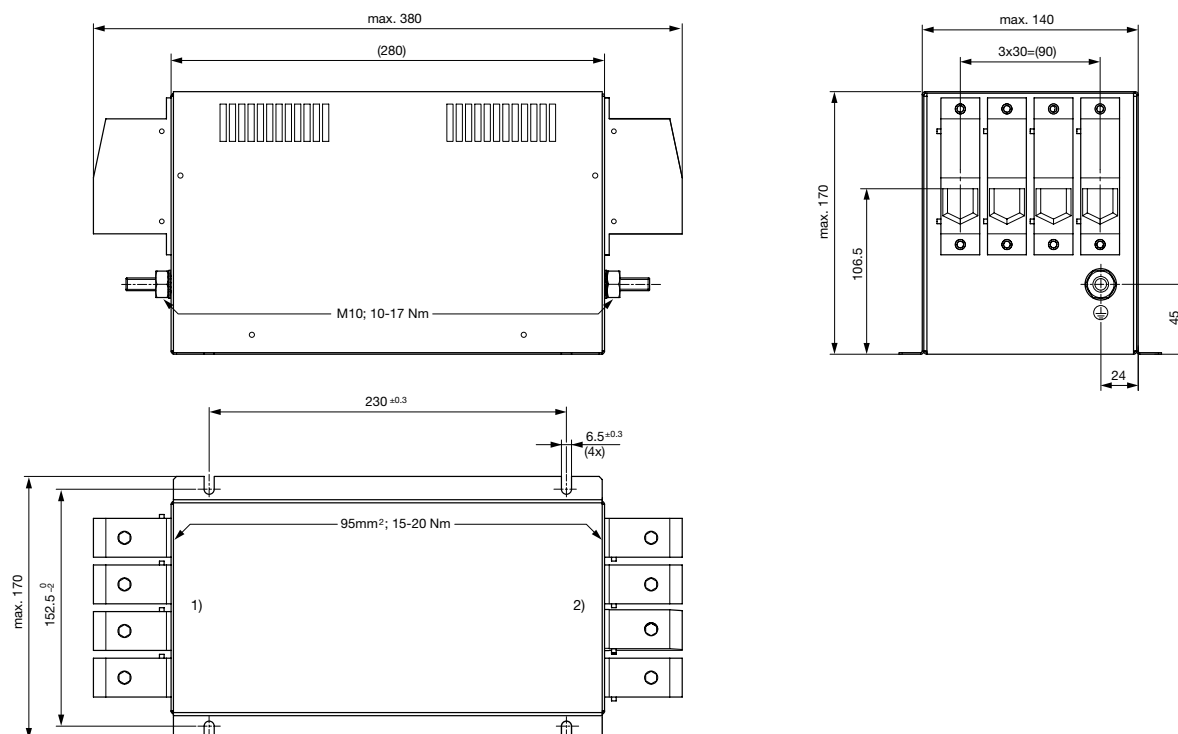


- 1) Line
- 2) Load

## Technical data to the filter components

| Rated Current<br>@ Ta 50°C (75°C) [A] | L1<br>[mH] | L2<br>[μH] | C1 [μF] | C2 [μF] | C3 [μF] | R1 [MΩ] | R2 [MΩ] | R3 [MΩ] |
|---------------------------------------|------------|------------|---------|---------|---------|---------|---------|---------|
| 8 (5)                                 | 2          | 4          | 2.2     | 2.2     | 3.4     | -       | 1       | 2       |
| 16 (11)                               | 1.3        | 12         | 2.2     | 2.2     | 3.4     | -       | 1       | 2       |
| 25 (16)                               | 1.6        | 12         | 4.7     | 4.7     | 3.4     | 1       | 1       | 2       |
| 36 (21)                               | 1          | 12         | 4.7     | 4.7     | 3.4     | 1       | 1       | 2       |
| 64 (40)                               | 0.7        | 7.5        | 4.7     | 4.7     | 3.4     | 1       | 1       | 2       |
| 80 (50)                               | 0.6        | 9          | 8.2     | 8.2     | 3.4     | 1       | 1       | 2       |
| 120 (96)                              | 0.6        | 9          | 13.6    | 13.6    | 3.4     | 0.5     | 0.5     | 2       |
| 160 (100)                             | 0.4        | 9          | 13.6    | 13.6    | 3.4     | 0.5     | 0.5     | 2       |
| 200 (140)                             | 0.3        | 9          | 13.6    | 13.6    | 3.4     | 0.5     | 0.5     | 2       |


## Diagrams

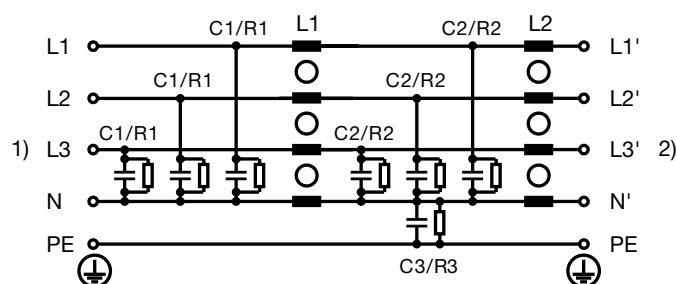

- 1) Line  
2) Load

## Derating Curves


Permissible Working Current as a Function of Ambient Temperature

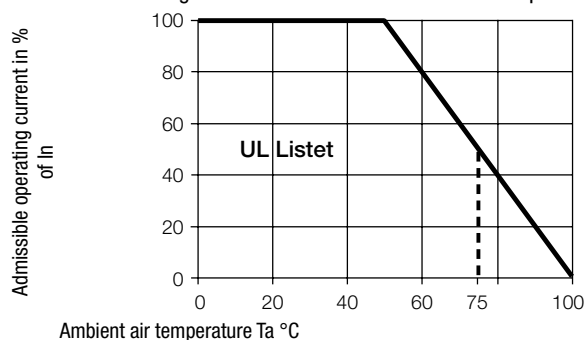


### Attenuation Loss

Industrial Version


7A

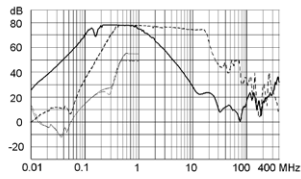


16A

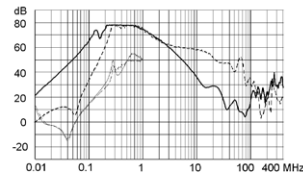


25A

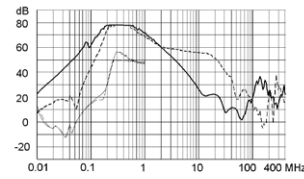


36A

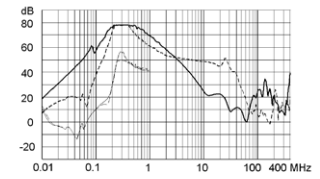


64A

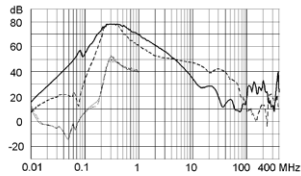


80A

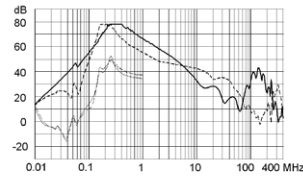


120A

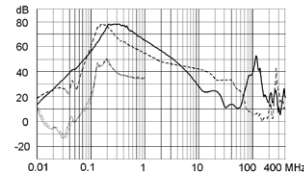

160A

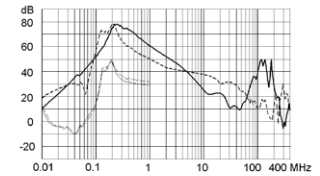

200A

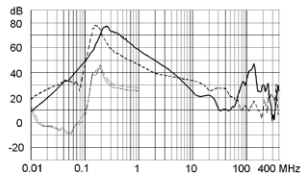

### Variants

| Rated Current<br>@ Ta 50°C (75°C) [A] | Tripped Power Dissipation [W] | Contact Resistance [mΩ] | Leakage Current [mA] <sup>1)</sup> | Weight [kg] | Screw clamps [mm <sup>2</sup> ] <sup>2)</sup> | Housing | Packaging unit [PCS] | Order Number   |
|---------------------------------------|-------------------------------|-------------------------|------------------------------------|-------------|-----------------------------------------------|---------|----------------------|----------------|
| 8 (5)                                 | 3.2                           | 12.5                    | < 1                                | 1.1         | 4                                             | 2A      | 2                    | FMBD-B92A-0812 |
| 16 (11)                               | 7                             | 6.8                     | < 1                                | 1.2         | 4                                             | 2A      | 2                    | FMBD-B92A-1612 |
| 25 (16)                               | 9.5                           | 3.8                     | < 1                                | 1.8         | 10                                            | 2B      | 2                    | FMBD-B92A-2512 |
| 36 (21)                               | 12.5                          | 2.4                     | < 1                                | 2           | 10                                            | 2B      | 2                    | FMBD-B92B-3612 |
| 64 (40)                               | 21.3                          | 1.3                     | < 1                                | 2.8         | 25                                            | 2C      | 1                    | FMBD-B92C-6412 |
| 80 (50)                               | 22.6                          | 0.88                    | < 1                                | 5.7         | 50                                            | 2D      | 1                    | FMBD-B92D-8012 |
| 120 (96)                              | 43.2                          | 0.75                    | < 1                                | 6.3         | 50                                            | 2E      | 1                    | FMBD-B92E-J212 |
| 160 (100)                             | 37.9                          | 0.37                    | < 1                                | 8           | 95                                            | 2F      | 1                    | FMBD-B92F-J612 |
| 200 (140)                             | 41.6                          | 0.26                    | < 1                                | 8.6         | 95                                            | 2F      | 1                    | FMBD-B92F-K012 |

1) Maximum leakage current under normal operating conditions, assuming that all three phases and the neutral conductor are connected to the supply and the consumer. Under this condition, the current will mainly return through the neutral line, not as earth leakage.

2) Maximum conductor cross section (wire gauge) to be used; a comparative table for AWG and mm<sup>2</sup> values can be found in the general product information [www.schurter.com/emc\\_info](http://www.schurter.com/emc_info)