TOLERANCE UNLESS SPECIFIED =	.XXX= +/- .005	.XX= +/- .015	FRACTIONS= +/- .032

FP16-375.DC2

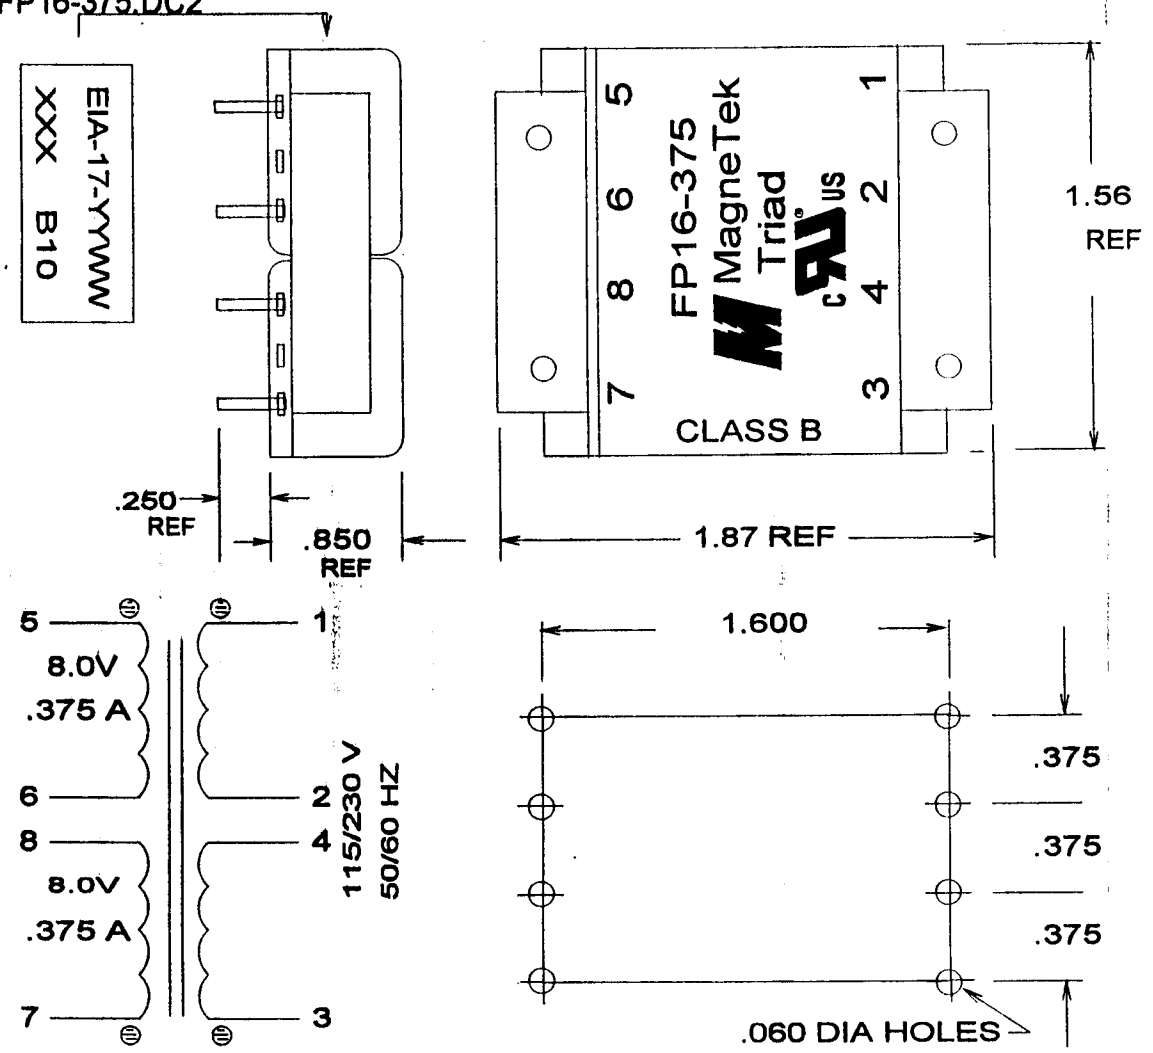

PRODUCTION TESTS

TURNS RATIO = 100%	
DC RESISTANCE IN OHMS NOM	1-2 = 353 TO 432
	3-4 = 353 TO 432
	5-6 = 3.4 TO 4.2
	7-8 = 3.4 TO 4.2
MAX EXCITATION CURRENT = .014 A	
APPLY = 230V, 60 HZ, 1-4, TIE 2+3	
1-2 = 3-4 = 115V	
EACH SEC, 10.6 TO 11.2 V	
HIPOT = 2000V, PRI'S TO SEC'S	
1500V PRI'S, SEC'S TO CORE	
500V, PRI TO PRI	
500V, SEC TO SEC	

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP16-375