

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at
www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

September 2016

FPF1504 / FPF1504L
Advanced Load Management Switch

Features

- 1.0 V to 3.6 V Input Voltage Operating Range
- Typical $R_{DS(ON)}$:
  - 15 mΩ at V_{IN}=3.3 V
  - 20 mΩ at V_{IN}=1.8 V
  - 40 mΩ at V_{IN}=1.0 V
- Slew Rate Control
- Output Discharge Function
- Low <1 µA Quiescent Current at V_{ON}=V_{IN}
- ESD Protected: 4000 V HBM, 2000 V CDM
- GPIO/CMOS-Compatible Enable Circuitry
- Active HIGH and active LOW versions

Applications

- Mobile Devices and Smart Phones
- Portable Media Devices
- Digital Cameras
- Advanced Notebook, UMPC, and MID
- Portable Medical Devices
- GPS and Navigation Equipment

Description

The FPF1504/FPF1504L are low-R_{DS} P-channel MOSFET load switches of the IntelliMAX™ family. Integrated slew-rate control prevents excessive inrush current from the supply rails with capacitive loads common in power applications. In addition, the FPF1504/FPF1504L feature output discharge capability.

The input voltage range operates from 1.0 V to 3.6 V to fulfill today's mobile device supply requirements. Switch control is by a logic input (ON pin) capable of interfacing directly with low-voltage CMOS control signals and GPIOs in embedded processors.

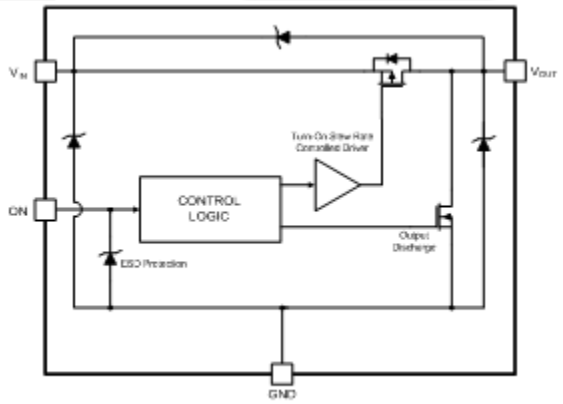


Figure 1. Block Diagram

Ordering Information

Part Number	Top Mark	Switch (Typical) At 1.8 V_{IN}	Input Buffer	Output Discharge	ON Pin Activity	Package
FPF1504UCX	G4	20 mΩ	CMOS	YES	Active HIGH	4-Ball, WLCSP, 0.5 mm Pitch
FPF1504BUCX	G4	20 mΩ	CMOS	YES	Active HIGH	4-Ball, WLCSP with Backside Laminate, 0.5 mm Pitch
FPF1504LUCX	GZ	20 mΩ	CMOS	YES	Active LOW	4-Ball, WLCSP, 0.5 mm Pitch
FPF1504LBUCX	GZ	20 mΩ	CMOS	YES	Active LOW	4-Ball, WLCSP with Backside Laminate, 0.5 mm Pitch

© 2012 Fairchild Semiconductor Corporation

Application Diagram

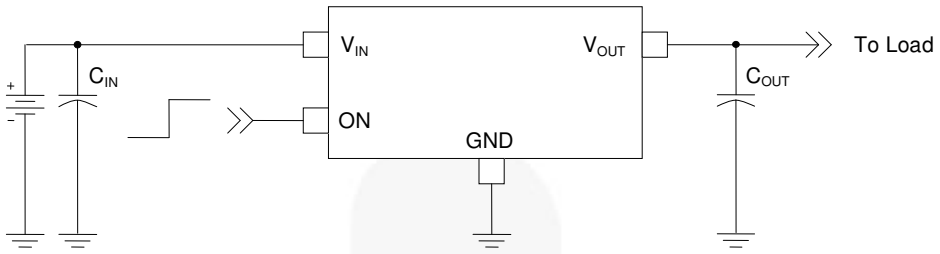


Figure 2. Typical Application

Notes:
1. C_{IN}=1 μF, X5R, 0603, for example Murata GRM185R60J105KE26.
2. C_{OUT}=1 μF, X5R, 0805, for example Murata GRM216R61A105KA01.

Pin Configurations



Figure 3. 1 x 1 mm WLCSP Bumps Facing Down




Figure 4. 1 x 1 mm WLCSP Bumps Facing Up

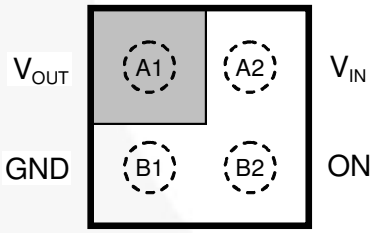


Figure 5. Pin Assignments (Top View)

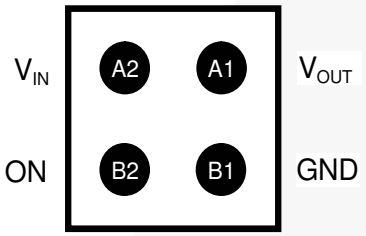


Figure 6. Pin Assignments (Bottom View)

Pin Definitions

Pin #	Name	Description
A1	V_{OUT}	Switch Output
A2	V_{IN}	Supply Input; Input to the Power Switch
B1	GND	Ground
B2	ON	ON/OFF Control

© 2012 Fairchild Semiconductor Corporation

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter		Min.	Max.	Unit
V_{IN}	V_{IN}, V_{OUT}, V_{ON} to GND		-0.3	4.0	V
I_{SW}	Maximum Continuous Switch Current			1.5	A
P_D	Power Dissipation at T_A=25°C			1.0	W
T_{STG}	Storage Junction Temperature		-65	+150	°C
T_A	Operating Temperature Range		-40	+85	°C
Θ_{JA}	Thermal Resistance, Junction-to-Ambient	1S2P with 1 Thermal Via		95	°C/W
		1S2P without Thermal Via		187	
ESD	Electrostatic Discharge Capability	Human Body Model, JESD22-A114	4		kV
		Charged Device Model, JESD22-C101	2		

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Max.	Unit
V_{IN}	Supply Voltage	1.0	3.6	V
T_A	Ambient Operating Temperature	-40	+85	°C

© 2012 Fairchild Semiconductor Corporation

Electrical Characteristics

Unless otherwise noted, V_{IN}=1.0 to 3.6 V, T_A=-40 to +85°C; typical values are at V_{IN}=3.3 V and T_A=25°C.

Symbol	Parameter		Conditions	Min.	Typ.	Max.	Units
Basic Operation							
V_{IN}	Supply Voltage			1.0		3.6	V
$I_{Q(OFF)}$	Off Supply Current	FPF1504	V_{ON}=GND, V_{OUT}=Open		0.25		µA
		FPF1504L	V_{ON}= V_{IN}, V_{OUT}=Open		0.3		
$I_{SD(OFF)}$	Off Switch Current	FPF1504	V_{ON}=GND, V_{OUT}=GND		0.25		
		FPF1504L	V_{ON}= V_{IN}, V_{OUT}=GND		0.3		
I_Q	Quiescent Current	FPF1504	I_{OUT}=0 mA, V_{IN}=3.6 V, V_{ON}=V_{IN}		0.08		
			I_{OUT}=0 mA, V_{ON}=$V_{IH(MIN)}$		0.75		
		FPF1504L	I_{OUT}=0 mA, V_{IN}=3.6 V, V_{ON}=GND		0.08		
			I_{OUT}=0 mA, V_{ON}=$V_{IL(MAX)}$		0.95		
R_{ON}	On Resistance		V_{IN}=3.3 V, I_{OUT}=200 mA, T_A=25°C		15	30	mΩ
			V_{IN}=1.8 V, I_{OUT}=200 mA, T_A=25°C		20	40	
			V_{IN}=1.5 V, I_{OUT}=200 mA, T_A=25°C		30		
			V_{IN}=1.0 V, I_{OUT}=200 mA, T_A=25°C		40	80	
			V_{IN}=1.8 V, I_{OUT}=200 mA, T_A=85°C[3]		35	50	
R_{PD}	Output Discharge Pull-Down Resistance		V_{ON}=0 V or V_{IN}, I_{OUT}=-20 mA		65	95	Ω
V_{IH}	On Input Logic High Voltage	FPF1504		0.8			V
V_{IL}	On Input Logic Low Voltage	FPF1504				0.3	
I_{ON}	On Input Leakage		V_{ON}=V_{IN} or GND			1	µA
Dynamic Characteristics							
t_{DON}	Turn-On Delay[4]	FPF1504	R_L=10 Ω, C_L=0.1 µF, V_{IN}=3.3 V, T_A=25°C		80		µs
t_R	V_{OUT} Rise Time[4]	FPF1504			130		
t_{ON}	Turn-On Time[4]	FPF1504			210		
t_{DON}	Turn-On Delay[4]	FPF1504	R_L=500 Ω, C_L=0.1 µF, V_{IN}=3.3 V, T_A=25°C		70	100	µs
		FPF1504L			95		
t_R	V_{OUT} Rise Time[4]	FPF1504			110	150	
		FPF1504L			115		
t_{ON}	Turn-On Time[4]	FPF1504			180	250	
		FPF1504L			210		

Continued on the following page…

© 2012 Fairchild Semiconductor Corporation


Electrical Characteristics (Continued)

Unless otherwise noted, V_{IN}=1.0 to 3.6 V, T_A=-40 to +85°C; typical values are at V_{IN}=3.3 V and T_A=25°C.

Symbol	Parameter		Conditions	Min.	Typ.	Max.	Units
Dynamic Characteristics (Continued)							
t_{DOFF}	Turn-Off Delay[4]	FPF1504	R_L=10 Ω, C_L=0.1 µF, V_{IN}=3.3 V, T_A=25°C		25	30	µs
t_F	V_{OUT} Fall Time[4]	FPF1504			2		
t_{OFF}	Turn-Off Time[4]	FPF1504			27		
t_{DOFF}	Turn-Off Delay[4]	FPF1504	R_L=500 Ω, C_L=0.1 µF, V_{IN}=3.3 V, T_A=25°C		25		µs
		FPF1504L			2		
t_F	V_{OUT} Fall Time[4]	FPF1504			12		
		FPF1504L			14		
t_{OFF}	Turn-Off Time[4]	FPF1504			37		
		FPF1504L			16		

Notes:
3. This parameter is guaranteed by design and characterization; not production tested.
4. t_{DON}/t_{DOFF}/t_R/t_F are defined in Figure 7.
5. Output discharge path is enabled during off.

Timing Diagram – FPF1504

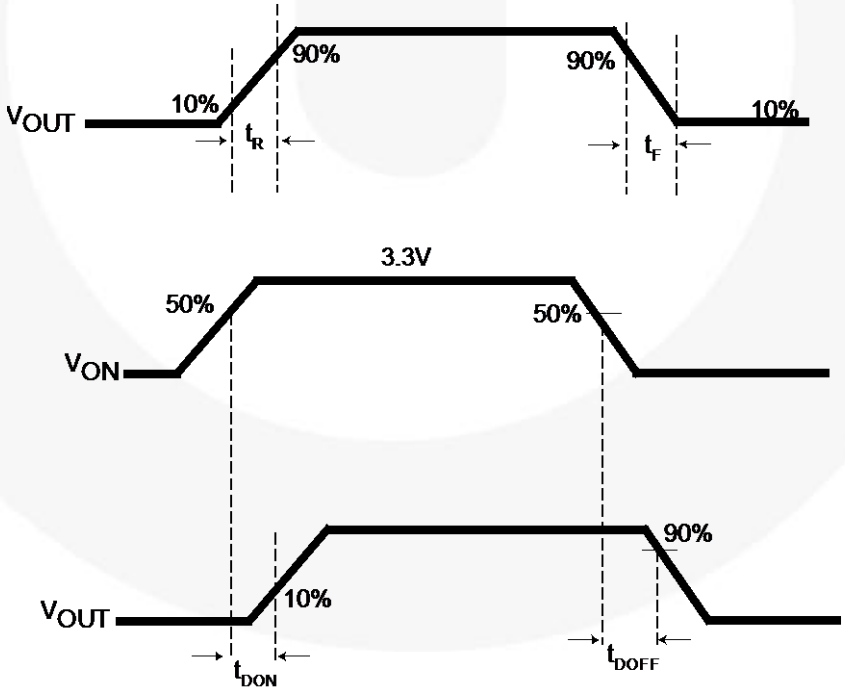

Notes:
6. t_{ON}=t_R + t_{DON}.
7. t_{OFF}=t_F + t_{DOFF}.

Figure 7. Timing Diagram for FPF1504

Typical Performance Characteristics for FPF1504

Applicable to active high version only.

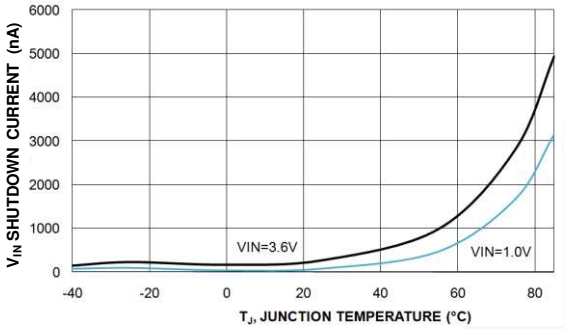


Figure 8. Shutdown Current vs. Temperature

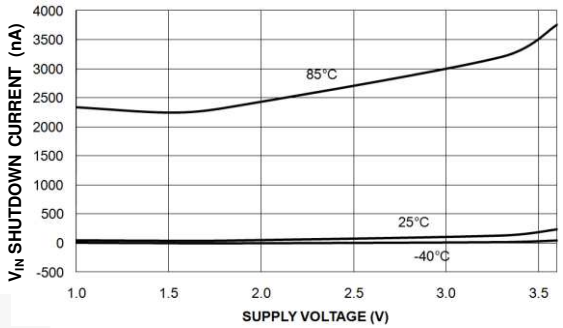


Figure 9. Shutdown Current vs. Supply Voltage

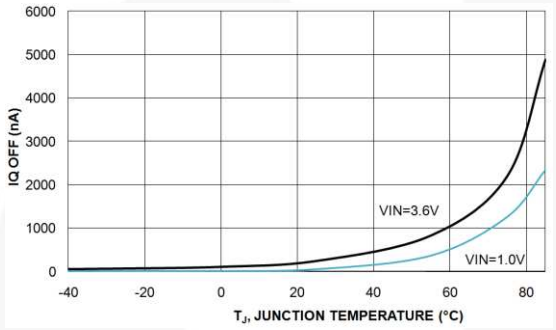


Figure 10. Off Supply Current vs. Temperature

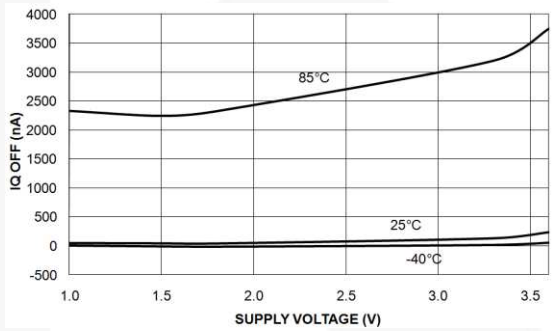


Figure 11. Off Supply Current vs. Supply Voltage

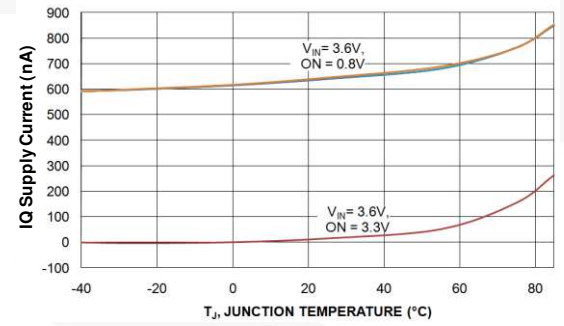


Figure 12. Quiescent Current vs. Temperature

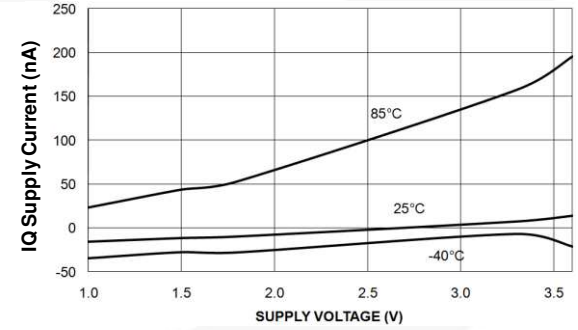


Figure 13. Quiescent Current vs. Supply Voltage (V_{ON}=V_{IN})

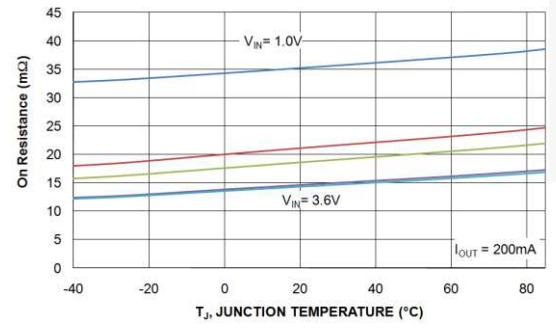


Figure 14. R_{ON} vs. Temperature

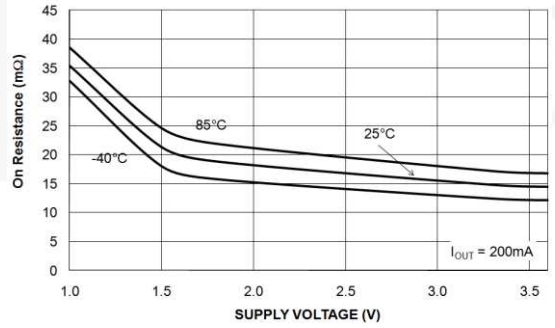


Figure 15. R_{ON} vs. Supply Voltage

© 2012 Fairchild Semiconductor Corporation

Typical Performance Characteristics for FPF1504

Applicable to active high version only.

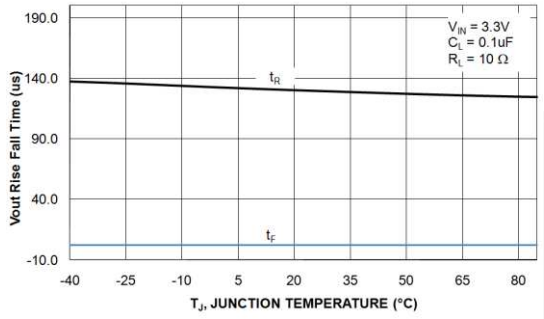


Figure 16. V_{OUT} Rise/Fall Times vs. Temperature (R_L=10 Ω)

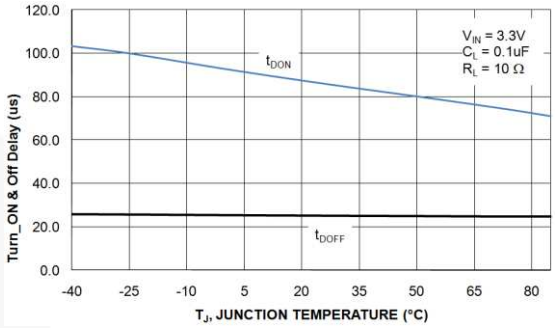


Figure 17. V_{OUT} Turn-On/Turn-Off Delays vs. Temperature (R_L=10 Ω)

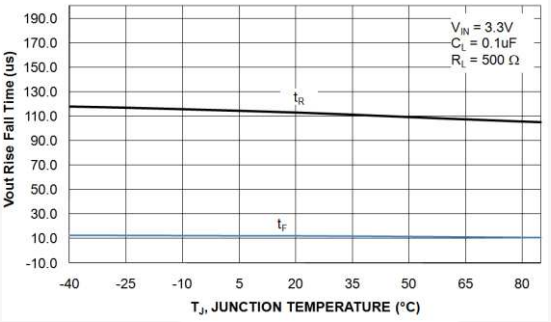


Figure 18. V_{OUT} Rise/Fall Time vs. Temperature (R_L=500 Ω)

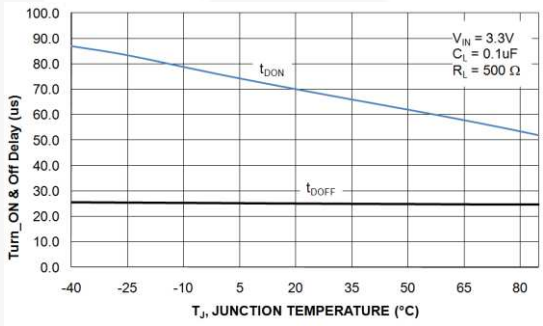


Figure 19. V_{OUT} Turn-On/Turn-Off Delays vs. Temperature (R_L=500 Ω)

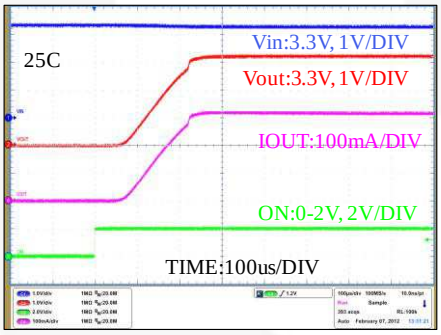


Figure 20. Turn-On Response (V_{IN}=3.3 V, C_{OUT}=0.1 µF, R_L=10 Ω)

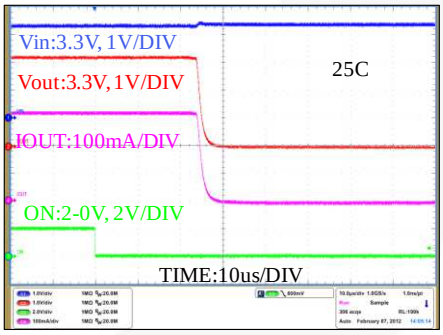


Figure 21. Turn-Off Response (V_{IN}=3.3 V, C_{OUT}=0.1 µF, R_L=10 Ω)

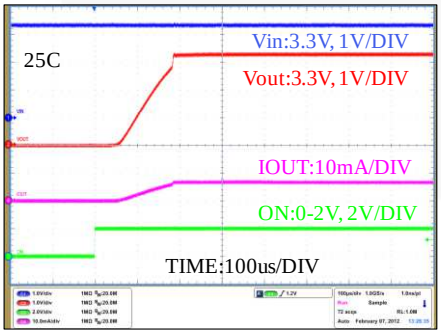


Figure 22. Turn-On Response (V_{IN}=3.3 V, C_{OUT}=0.1 µF, R_L=500 Ω)

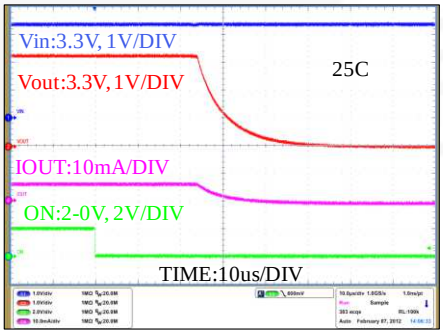


Figure 23. Turn-Off Response (V_{IN}=3.3 V, C_{OUT}=0.1 µF, R_L=500 Ω)

Application Information

Input Capacitor

IntelliMAX™ switches don't require an input capacitor. To reduce device inrush current, a 0.1 µF ceramic capacitor, C_{IN}, is recommended close to the VIN pin. A higher value of C_{IN} can be used to further reduce the voltage drop experienced as the switch is turned on into a large capacitive load.

Output Capacitor

IntelliMAX™ switches work without an output capacitor. If the applications parasitic board inductance forces V_{OUT} below GND when switching off, a 0.1 µF capacitor, C_{OUT}, should be placed between V_{OUT} and GND.

Fall Time

Device output fall time can be calculated based on RC constant of external components as follows:

$$t_F = R_L \times C_L \times 2.2 \quad (1)$$

where t_F is 90% to 10% fall time, R_L is output, load and C_L is output capacitor.

The same equation works for a device with a pull-down output resistor, then R_L is replaced by a parallel connected pull-down and external output resistor combination, as follows:

$$t_F = \frac{R_L \times R_{PD}}{R_L + R_{PD}} \times C_L \times 2.2 \quad (2)$$

where t_F is 90% to 10% fall time, R_L is output load, R_{PD} is output pull-down resistor (65 Ω typical), and C_L is the output capacitor.

Recommended Land Pattern and Layout

For best thermal performance and minimal inductance and parasitic effects, it is recommended to keep input and output traces short and the capacitors as close to the device as possible. Below is a recommended layout for this device to achieve optimum performance.

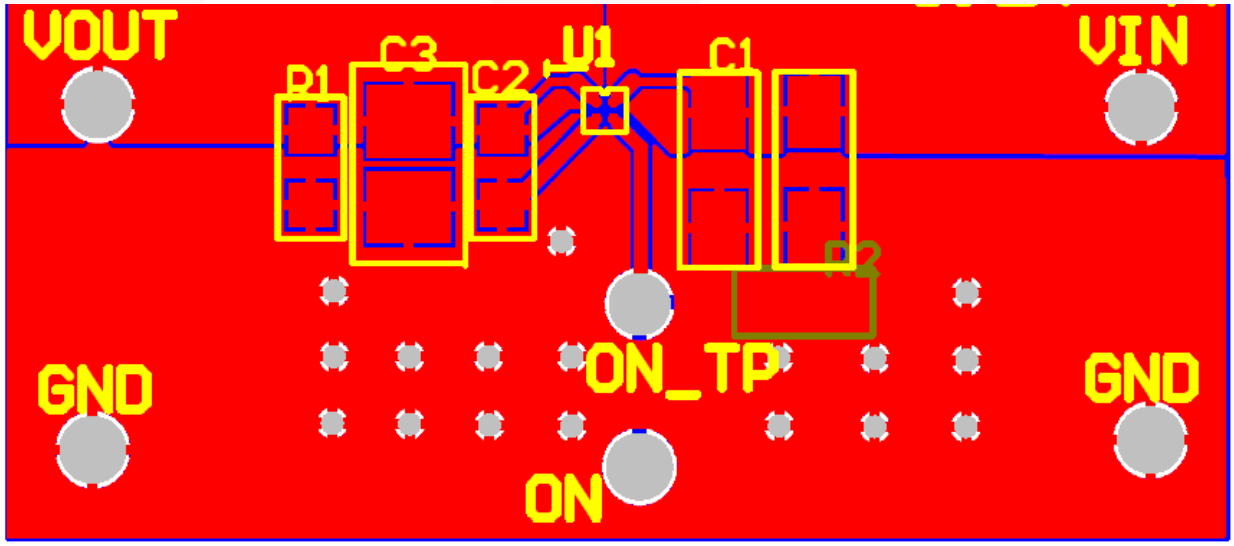


Figure 24. Recommended Land Pattern and Layout


© 2012 Fairchild Semiconductor Corporation

The following information applies to the WLCSP package dimensions on the next page:


Product-Specific Dimensions

Product	D	E	X	Y
FPF1504UCX	960 µm ±30 µm	960 µm ±30 µm	0.230 mm	0.230 mm
FPF1504BUCX				
FPF1504LUCX				
FPF1504LBUCX				


© 2012 Fairchild Semiconductor Corporation

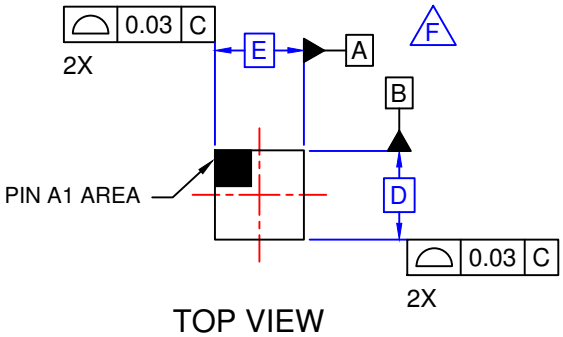


TOP VIEW

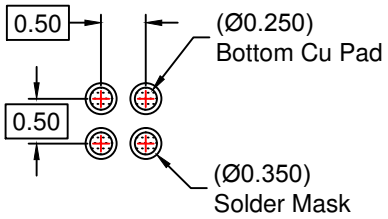

RECOMMENDED LAND PATTERN
(NSMD PAD TYPE)

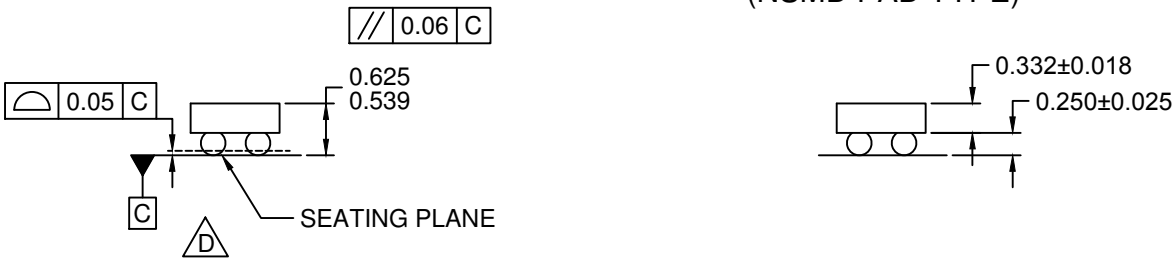

SIDE VIEWS

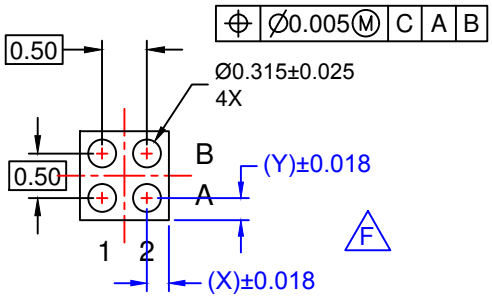

BOTTOM VIEW

NOTES:

A. NO JEDEC REGISTRATION APPLIES.

B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.

D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.

E. PACKAGE NOMINAL HEIGHT IS 582 MICRONS ±43 MICRONS (539-625 MICRONS).

F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.

G. DRAWING FILENAME: MKT-UC004ABrev3.

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative