FAIRCHILD
SEMICONDUCTOR TM

FPN530
FPN530A



TO-226

NPN Low Saturation Transistor

These devices are designed for high current gain and low saturation voltage with collector currents up to 3.0 A continuous. Sourced from Process NC.

Absolute Maximum Ratings* TA = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{CEO}	Collector-Emitter Voltage	30	V
V_{CBO}	Collector-Base Voltage	60	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current - Continuous	3.0	A
T_J, T_{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:
1) These ratings are based on a maximum junction temperature of 150 degrees C.
2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics TA = 25°C unless otherwise noted

Symbol	Characteristic	Max	Units
		FPN530 / FPN530A	
P_D	Total Device Dissipation	1.0	W
$R_{\theta JC}$	Thermal Resistance, Junction to Case	50	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	125	°C/W

© 1999 Fairchild Semiconductor Corporation

NPN Low Saturation Transistor
(continued)

Electrical Characteristics
TA = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions		Min	Max	Units
OFF CHARACTERISTICS						
BV_{CEO}	Collector-Emitter Breakdown Voltage	I_C = 10 mA, I_B = 0		30		V
BV_{CBO}	Collector-Base Breakdown Voltage	I_C = 100 µA, I_E = 0		60		V
BV_{EBO}	Emitter-Base Breakdown Voltage	I_E = 100 µA, I_C = 0		5.0		V
I_{CBO}	Collector Cutoff Current	V_{CB} = 30 V, I_E = 0 V_{CB} = 30 V, I_E = 0, T_A = 100°C			100 10	nA µA
I_{EBO}	Emitter Cutoff Current	V_{EB} = 4.0 V, I_C = 0			100	nA
ON CHARACTERISTICS*						
h_{FE}	DC Current Gain	I_C = 100 mA, V_{CE} = 2.0 V	**530** **530A**	100 250		
		I_C = 1.0 A, V_{CE} = 2.0 V		120		
		I_C = 2.0 A, V_{CE} = 2.0 V		80		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C = 1.0 A, I_B = 100 mA	**530** **530A**		300 250	mV mV
		I_C = 2.0 A, I_B = 200 mA			450	mV
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	I_C = 1.0 A, I_B = 100 mA			1.25	V
$V_{BE(on)}$	Base-Emitter Saturation Voltage	I_C = 1.0 A, V_{CE} = 2.0 V			1.0	V
SMALL SIGNAL CHARACTERISTICS						
C_{obo}	Output Capacitance	V_{CB} = 10 V, I_E = 0, f = 1.0 MHz			50	pF
F_T	Transition Frequency	I_C = 100 mA, V_{CE} = 5.0 V, f = 100 MHz		150		MHz

*Pulse Test: Pulse Width ≤ 300 µs, Duty Cycle ≤ 2.0%

Typical Characteristics

Base-Emitter Saturation Voltage vs Collector Current

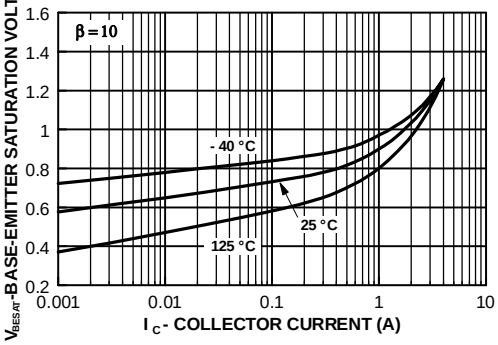

Base-Emitter On Voltage vs Collector Current

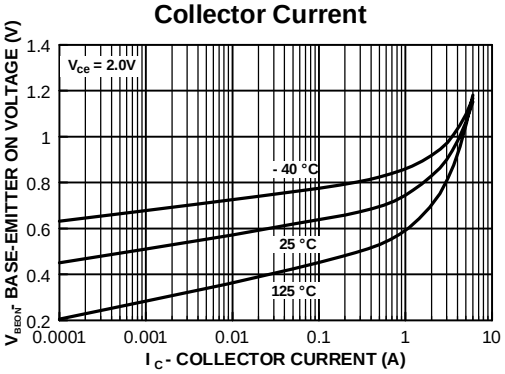

Collector-Emitter Saturation Voltage vs Collector Current

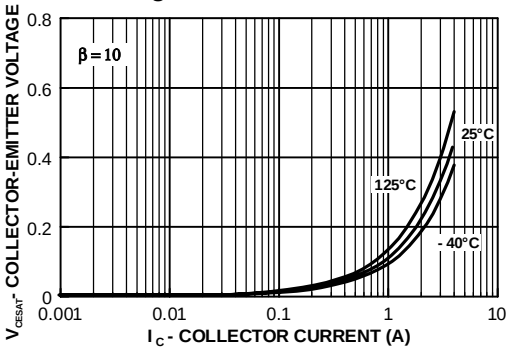

Input/Output Capacitance vs Reverse Bias Voltage

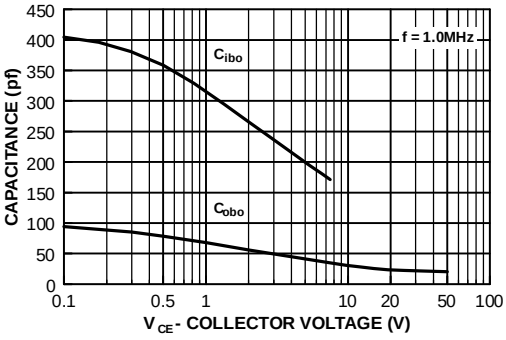

Current Gain vs Collector Current

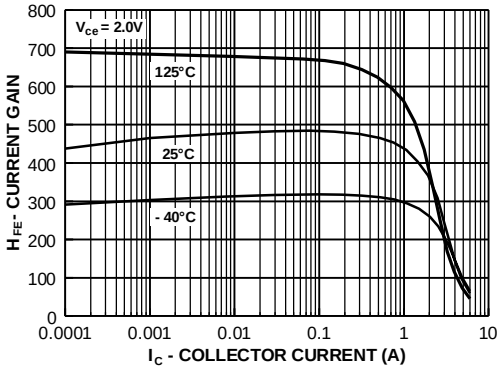

Power Dissipation vs Ambient Temperature

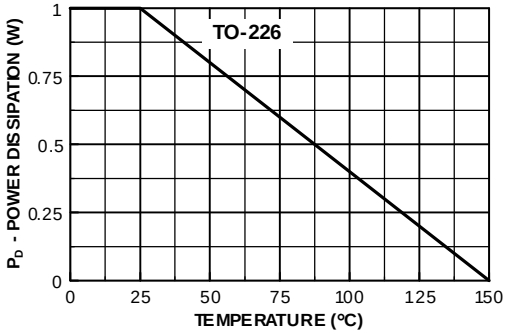

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™
Bottomless™
CoolFET™
CROSSVOLT™
DOME™
E^2CMOS^{TM}
EnSigna™
FACT™
FACT Quiet Series™
FAST®
FASTr™
GlobalOptoisolator™
GTO™
HiSeC™
ISOPLANAR™
MICROWIRE™
OPTOLOGIC™
OPTOPLANAR™
PACMAN™
POP™
PowerTrench®
QFET™
QS™
QT Optoelectronics™
Quiet Series™
SILENT SWITCHER®
SMART START™
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SyncFET™
TinyLogic™
UHC™
VCX™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.
As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.