

FR301 THRU FR307


FAST RECOVERY RECTIFIER
Reverse Voltage: 50 to 1000 Volts
Forward Current:3.0Amperes

FEATURES


- Low leakage
- Low forward voltage drop
- High current capability
- High current surge
- High reliability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU

MECHANICAL DATA

- Case: JEDEC DO-201AD molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.041 OUNCE,1.18 grams



DO-201AD

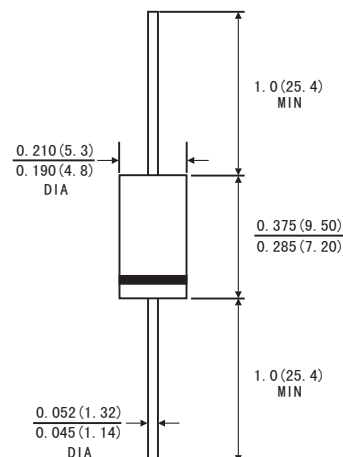

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.Single phase ,half wave ,60Hz,resistive or inductive load. For capacitive load,derate current by 20%.)

		Symbols	FR 301	FR 302	FR 303	FR 304	FR 305	FR 306	FR 307	Units
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current		I(AV)	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	150							Amps
Maximum Instantaneous Forward Voltage at 3.0A		V _F	1.3							Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25°C	I _R	10							μA
	T _A =100°C		150							
Maximum reverse recovery time(Note1)		t _{rr}	150				250	500		ns
Typical junction capacitance(Note2)		C _J	60							pF
Operating junction and storage temperature range		T _J T _{STG}	-55 to+125 -55 to+150							°C

Note: 1. Test conditions: $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$.

2. Measured at 1MHz and applied reverse voltage of 4.0 Volts D.C.

RATINGS AND CHARACTERISTIC CURVES FR301 THRU FR307

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

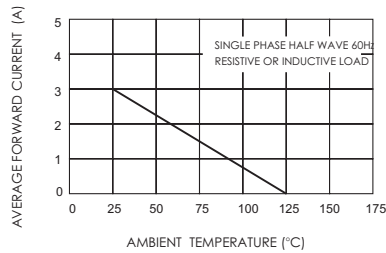


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

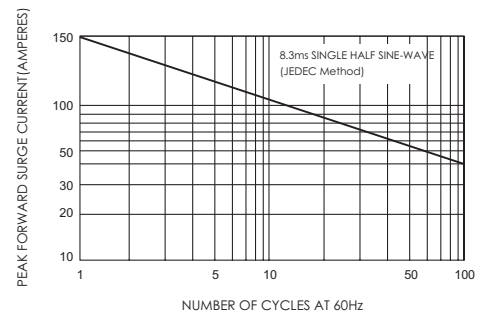


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

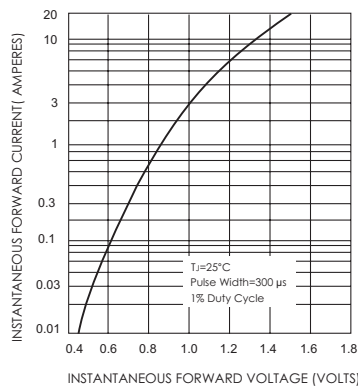


FIG.4-TYPICAL JUNCTION CAPACITANCE


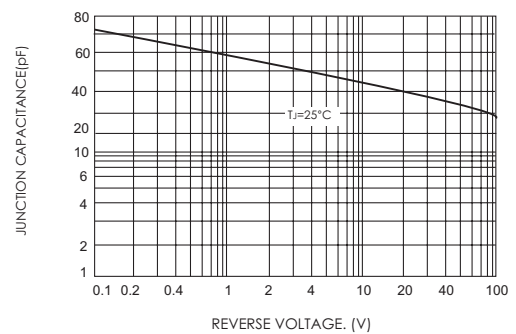


FIG.5-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES: 1. Rise Time=7ns max. input Impedance=1 megohm 22pF
2. Rise Time=10ns max. source Impedance=50 ohms

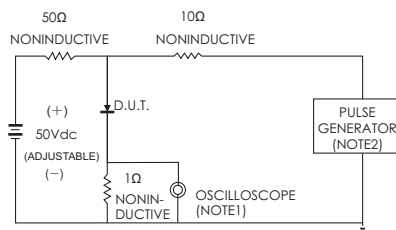