
TOLERANCE UNLESS SPECIFIED =	.XXX= +/- .005	.XX= +/- .015	FRACTIONS= +/- .032

FS29-35.DC2

YYWW = YEAR, WEEK
XXX = SITECODE

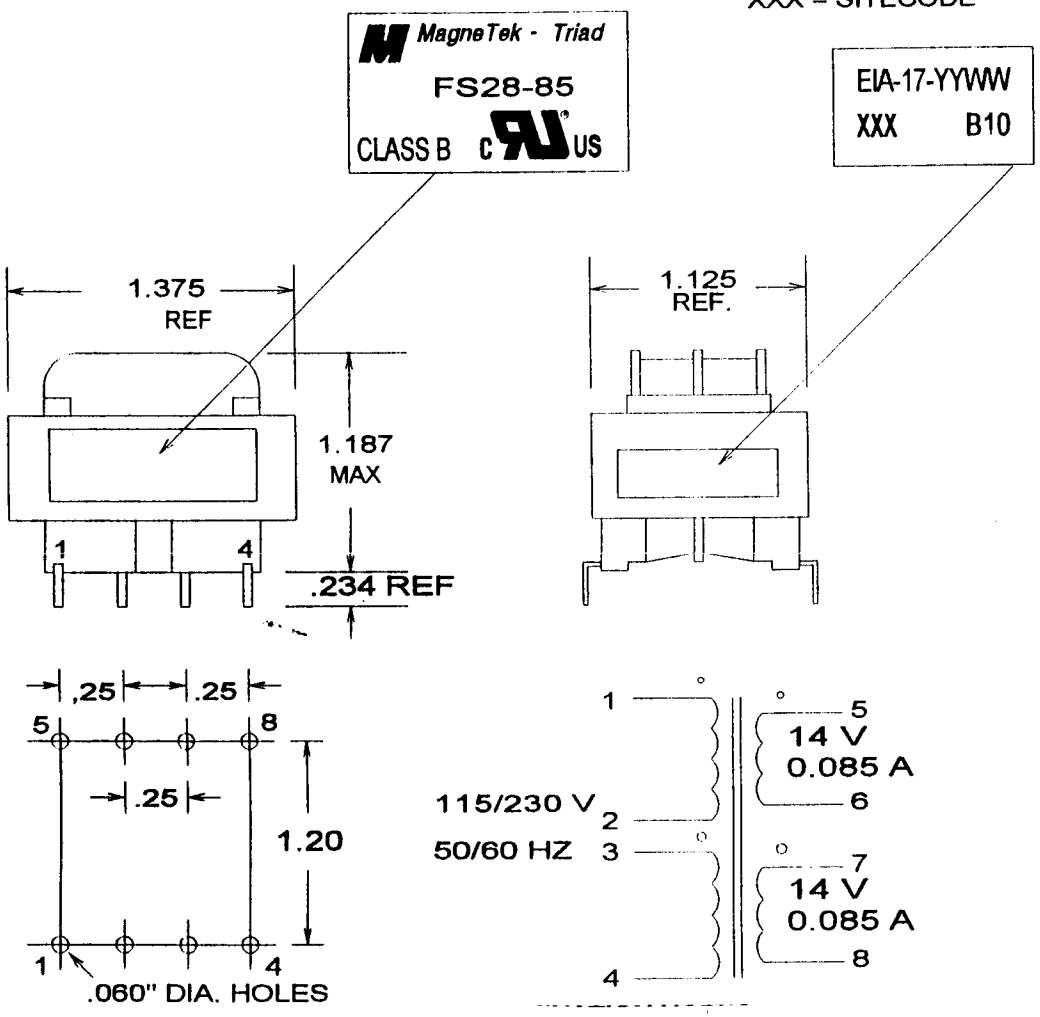

PRODUCTION TESTS

DC RESISTANCE IN OHMS	1-2 = 675 TO 815
	3-4 = 825 TO 970
	5-6 =16.8 TO 20.6
	7-8 = 20.5 TO 25.1

MAX EXCITATION CURRENT = 0.010 A

APPLY = 230V 60 HZ, 1-4, TIE 2+3

OPEN CIRCUIT VOLTAGE:

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 17.5 TO 18.5 V

HIPOT: 2500V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

CONTINUITY: PRIMARY 100%

IMPREGNATION NOTES = 2 HOUR PREHEAT

PINS MUST BE FREE OF IMPREG.

MagneTek

METHOD	MARKING
1 X 1	SEE LABEL DETAIL ABOVE

PART NO. FS28-85