

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
20V	25mΩ@4.5V	6A
	32mΩ@2.5V	

Feature

- Advanced trench process technology
- High density cell design for ultra low on-resistance

Application


- Battery protection
- Switching application

Package




SOT-23-6L

Circuit diagram

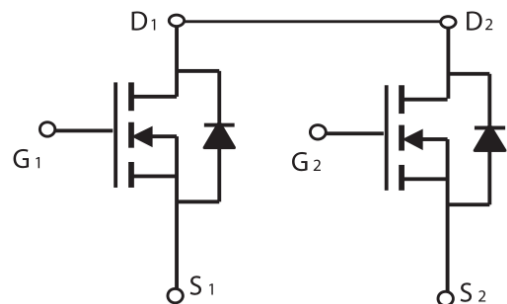

Marking



Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	6	A
Pulsed Drain Current	I_{DM}	25	A
Power Dissipation	P_D	1.5	W
Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Electrical characteristics (Ta=25 °C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =20V,V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±12V, V _{DS} = 0V			±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.5		1.2	V
Drain-source on-resistance ¹⁾	R _{DS(on)}	V _{GS} =4.5V, I _D =6.0A		18	25	mΩ
		V _{GS} =2.5V, I _D =5.0A		23	32	
Forward transconductance ¹⁾	g _{FS}	V _{DS} =5V, I _D =7A	9			S
Dynamic characteristics ²⁾						
Input Capacitance	C _{iss}	V _{DS} =8V,V _{GS} =0V,f =1MHz		800		pF
Output Capacitance	C _{oss}			155		
Reverse Transfer Capacitance	C _{rss}			125		
Total Gate Charge	Q _g	V _{DS} =10V,V _{GS} =4.5V,I _D =4A		11		nC
Gate-Source Charge	Q _{gs}			2.3		
Gate-Drain Charge	Q _{gd}			2.5		
Turn-on delay time	t _{d(on)}	V _{DD} =10V,V _{GS} =4V, I _D =1A,,R _{GEN} =10Ω		13		nS
Turn-on rise time	t _r			54		
Turn-off delay time	t _{d(off)}			18		
Turn-off fall time	t _f			11		
Source-Drain Diode characteristics						
Diode Forward voltage	V _{DS}	V _{GS} =0V, I _S =4.0A			1.2	V

Notes:

 1) Pulse Test: Pulse Width < 300 μs , Duty Cycle $\leq 2\%$.

2) Guaranteed by design, not subject to production testing.

Typical Characteristics

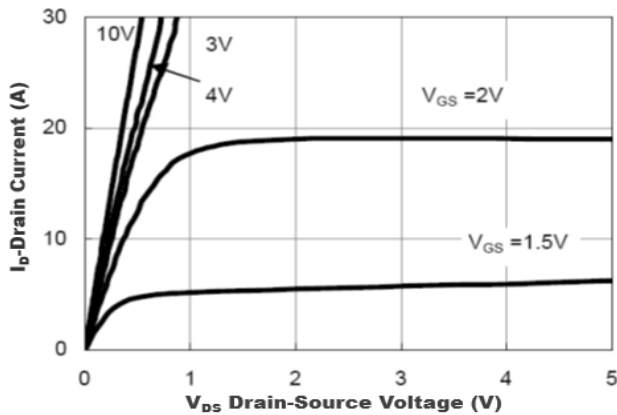


Figure1. Output Characteristics

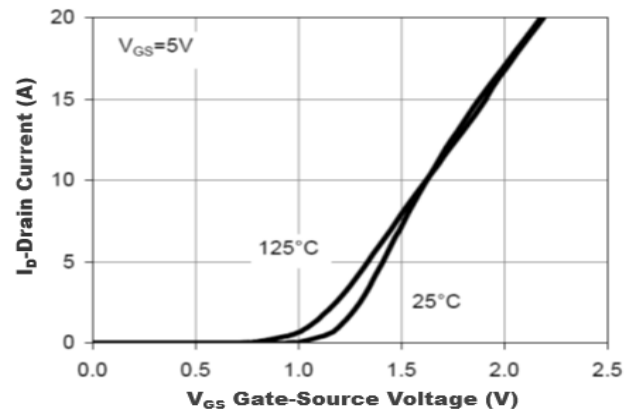


Figure2. Transfer Characteristics

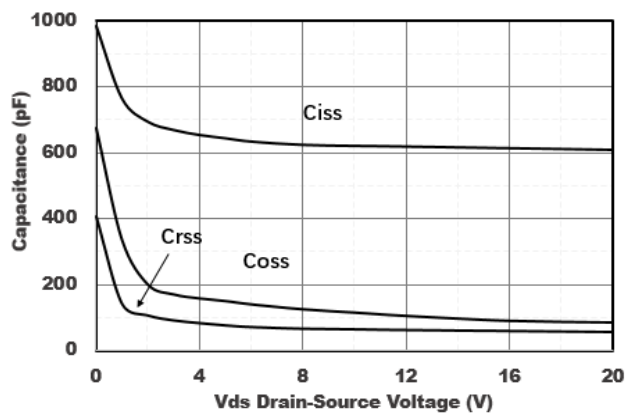


Figure3. Capacitance Characteristics

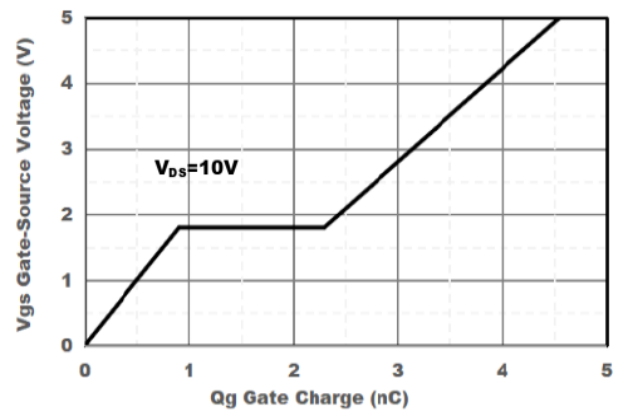


Figure4. Gate Charge

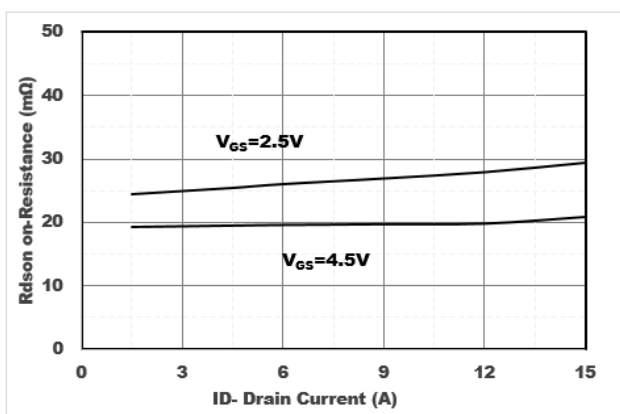


Figure5. Drain-Source on Resistance


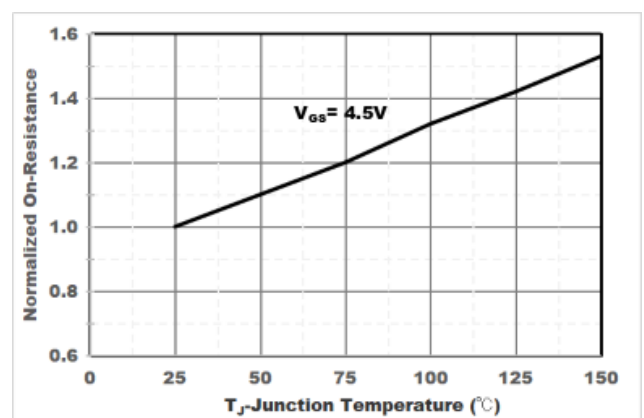


Figure6. Drain-Source on Resistance

SOT-23-6L Package Information

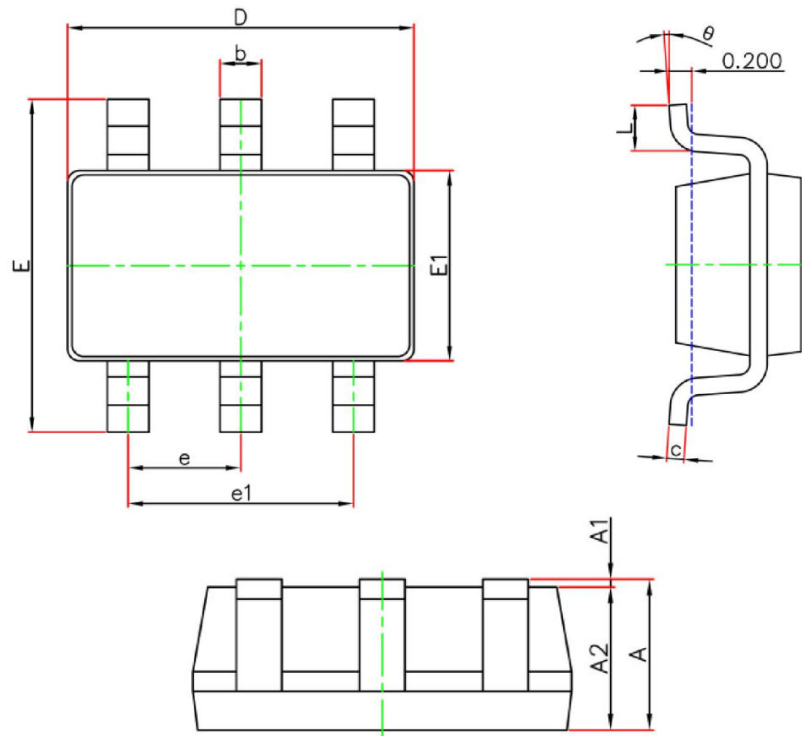

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	2.650	2.950	0.104	0.116
E1	1.500	1.700	0.059	0.067
e	0.950 (BSC)		0.037 (BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°