
40Amp Schottky Barrier Rectifier

FST4050 – FST4060

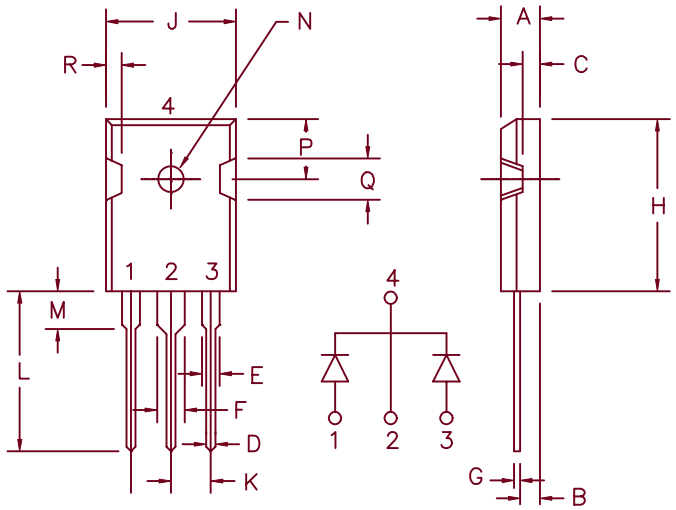

Similar to TO–247AD

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
FST4050	50V	50V
FST4060	60V	60V

- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- 150°C Junction Temperature
- V_{RRM} 50 to 60 Volts

Electrical Characteristics

Average Forward Current per pkg.	$I_{F(AV)}$ 40 Amps	T_C = 122°C, Square wave, $R_{\theta JC}$ = 1.0°C/W
Average Forward Current per leg	$I_{F(AV)}$ 20 Amps	T_C = 122°C, Square wave, $R_{\theta JC}$ = 2.0°C/W
Maximum Surge Current per leg	I_{FSM} 400 Amps	8.3ms, half sine
Max. Peak Forward Voltage per leg	V_{FM} .70 Volts	I_{FM} = 20A, T_J = 125°C*
Max. Peak Forward Voltage per leg	V_{FM} .80 Volts	I_{FM} = 20A, T_J = 25°C*
Max. Peak Reverse Current per leg	I_{RM} 100 mA	V_{RRM}, T_J = 125°C*
Max. Peak Reverse Current per leg	I_{RM} 10 mA	V_{RRM}, T_J = 25°C
Typical Junction Capacitance per leg	C_J 920 pF	V_R = 5.0V, T_J = 25°C

*Pulse test: Pulse width 300 usec. Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	−55°C to +175°C
Operating junction temp range	T_J	−55°C to +150°C
Max thermal resistance per leg	$R_{\theta JC}$	2.0°C/W
Max thermal resistance per pkg.	$R_{\theta JC}$	1.0°C/W
Mounting Torque		10 inch pounds maximum (4–40 screws)
Weight		.22 ounces (6.36 grams) typical

COLORADO Microsemi
800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469–2161
FAX: (303) 466–3775
www.microsemi.com

2–3–00 Rev. 1

FST4050 – FST4060

Figure 1
Typical Forward Characteristics – Per Leg

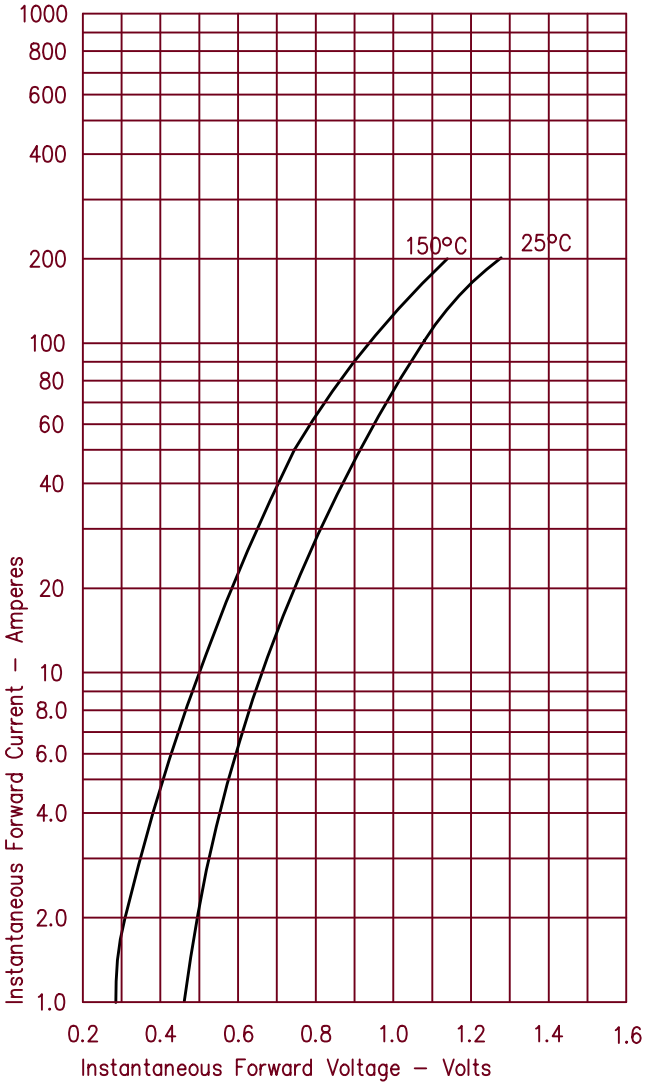


Figure 2
Typical Reverse Characteristics – Per Leg

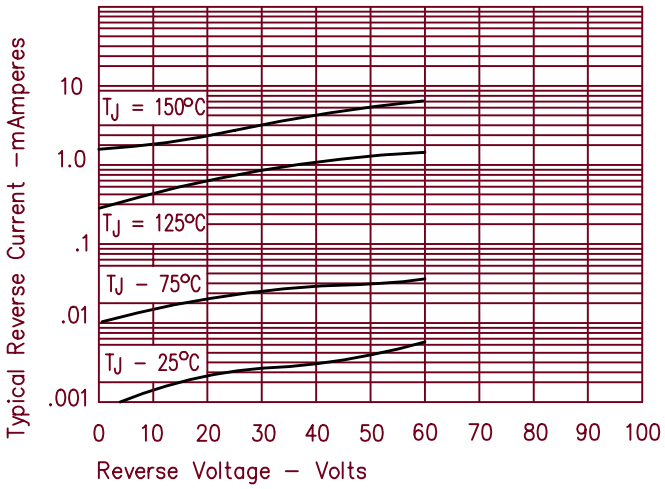


Figure 3
Typical Junction Capacitance – Per Leg

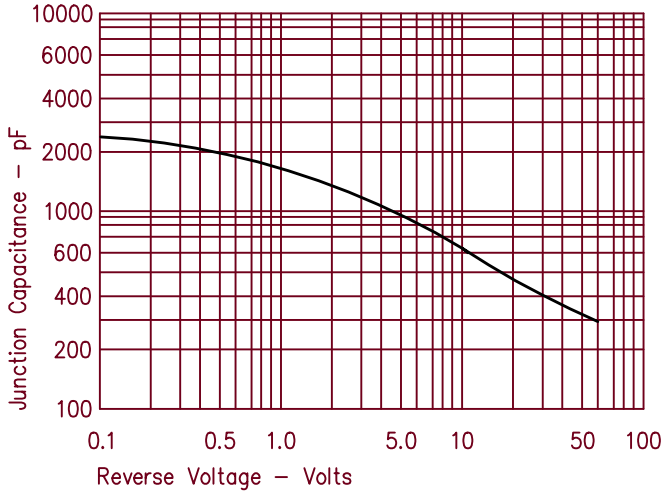


Figure 4
Forward Current Derating – Per Leg

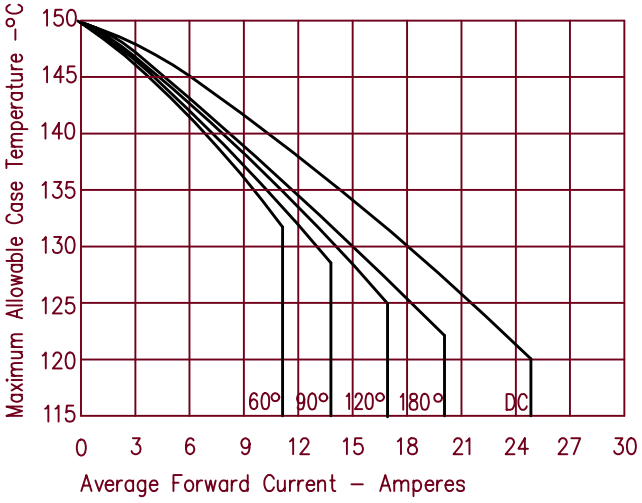


Figure 5
Maximum Forward Power Dissipation – Per Leg

