
FT300DL

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15


Phase Control SCR
300 Amperes Avg
200-1200 Volts

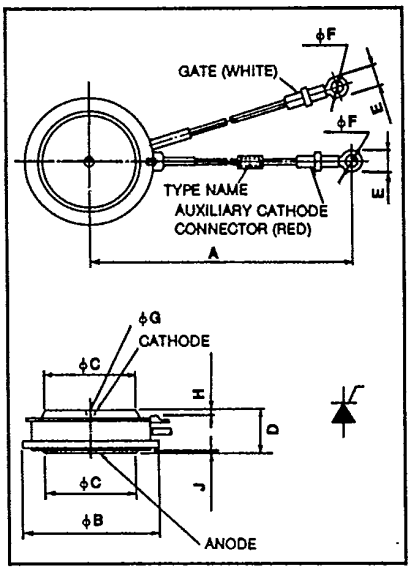

FT300DL
Outline Drawing

Dimensions	Inches	Metric
A	12.60 ± .30	320 ± 8
ϕB	1.968 Max	50 Max
ϕC	1.220	31
D	.57 ± .02	14.5 ± 0.5
E	.30	7.5
ϕF	.169	4.3
ϕG[1]	.138	3.5
H	.04 Min	1.0 Min
J	.02 Min	.04 Min

[1]Depth .04 in. or 1 mm

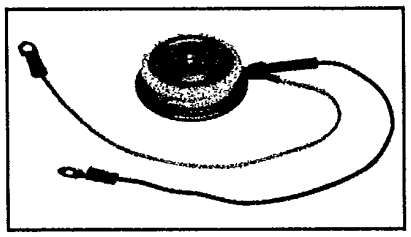

FT300DL
Phase Control SCR
300 Amperes/200-1200 Volts

Description
Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

Features:
- ☐ Low On-State Voltage
- ☐ High di/dt
- ☐ High dv/dt
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I^2t Ratings

Applications:
- ☐ Power Supplies
- ☐ Battery Chargers
- ☐ Motor Control
- ☐ Light Dimmers
- ☐ VAR Generators

Ordering Information
Example: Select the complete eight or nine digit part number you desire from the table – i.e. FT300DL-16 is a 800 Volt, 300 Ampere Phase Control SCR.

Type	Voltage*		Current
	V_{DRM} V_{RRM}	Code	I_T (avg)
FT300DL	200	-4	300
	300	-6	
	400	-8	
	500	-10	
	600	-12	
	800	-16	
	1000	-20	
	1200	-24	

*Voltage classes 8, 12, 16, and 24 are standard; others are special products

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT300DL
Phase Control SCR
300 Amperes Avg/200-1200 Volts

Absolute Maximum Ratings

	Symbol	FT300DL	Units
RMS On-State Current	$I_{T(RMS)}$	470	Amperes
Average On-State Current	$I_{T(av)}$	300	Amperes
Peak One-Cycle Surge (Non Repetitive) On-State Current (60Hz)	I_{TSM}	8000	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{TSM}	7300	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive)	di/dt	500	Amperes/μs
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	200	Amperes/μs
I^2t (for Fusing), one cycle at 60Hz	I^2t	2.7×10^5	A^2sec
Peak Gate Power Dissipation	P_{GM}	10	Watts
Average Gate Power Dissipation	$P_{G(av)}$	5	Watts
Storage Temperature	T_{STG}	−40 to 150	°C
Operating Temperature	T_J	−40 to 125	°C
Mounting Force①		800 to 1000	lb.
Mounting Force①		360 to 450	kg

Electrical and Thermal Characteristics


Characteristics	Symbol	Test Conditions	FT300DL	Units
Voltage—Blocking State Maximums				
Forward Leakage, Peak	I_{DRM}	T_J = 125°C, V_{DRM} applied	30	mA
Reverse Leakage, Peak	I_{RRM}	T_J = 125°C, V_{RRM} applied	30	mA
Current—Conducting State Maximums				
Peak On-State Voltage	V_{TM}	I_{TM} = 940A, T_J = 125°C	1.50	Volts
Switching				
Min. Critical dv/dt exponential to V_{DRM}	dv/dt	T_J = 125°C, V_D = ½V_{DRM}	200	V/μsec
Thermal				
Maximum Thermal Resistance,① double sided cooling Junction to Sink	$R_{\theta JS}$		.09	°C/Watt
Gate—Maximum Parameters				
Gate Current to Trigger	I_{GT}	V_D = 6V, T_J = 25°C, R_L = 2Ω	200	mA
Gate Voltage to Trigger	V_{GT}	V_D = 6V, T_J = 25°C, R_L = 2Ω	2.5	Volts
Non-Triggering Gate Voltage	V_{GDM}	T_J = 125°C, V_D = ½V_{DRM}	.20	Volts
Peak Forward Gate Current	I_{GTM}		4	Amperes
Peak Reverse Gate Voltage	V_{GRM}		5	Volts

① Consult recommended mounting procedures.


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT300DL
Phase Control SCR
300 Amperes Avg/200-1200 Volts


MAXIMUM ON-STATE CHARACTERISTICS

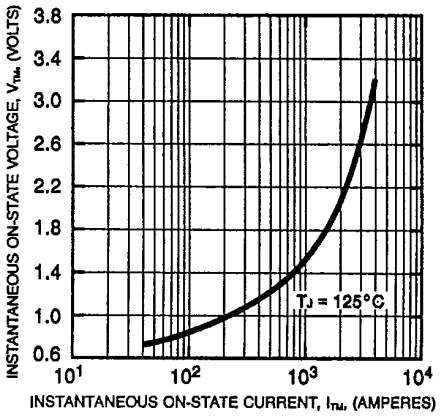


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO SINK)

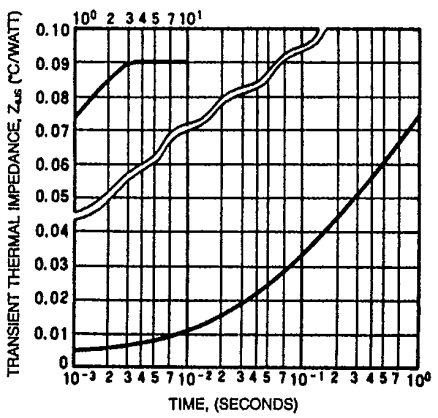


MAXIMUM ALLOWABLE SINK TEMPERATURE (SINUSOIDAL WAVEFORM)

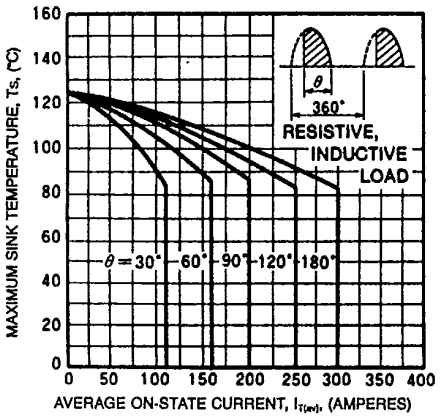


MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)

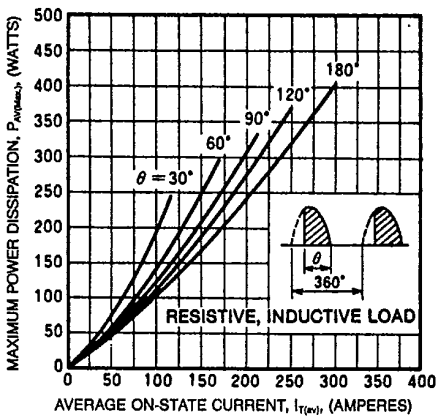

MAXIMUM ALLOWABLE SINK TEMPERATURE (RECTANGULAR WAVEFORM)

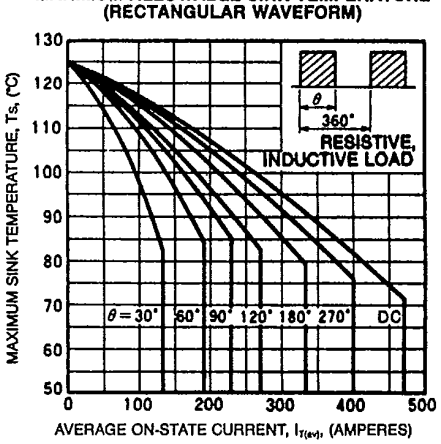


MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)

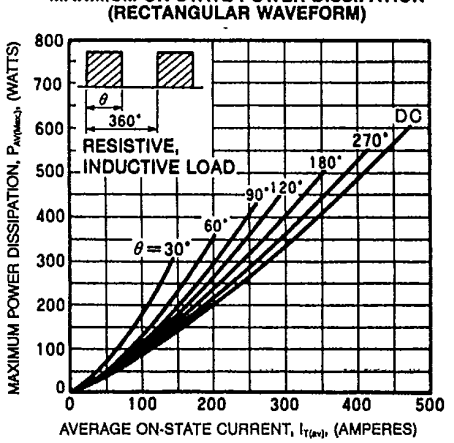


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT300DL
Phase Control SCR
300 Amperes Avg/200-1200 Volts


MAXIMUM ALLOWABLE SURGE ON-STATE CURRENT (NON-REPETITIVE)

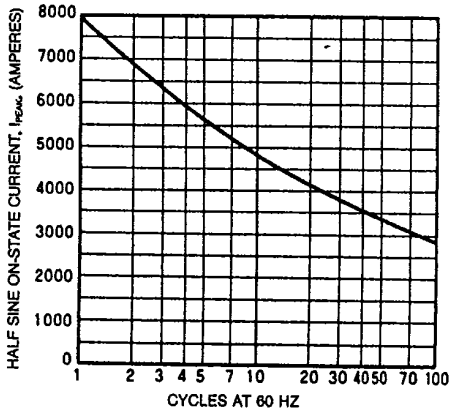

TURN-ON AND DELAY TIME

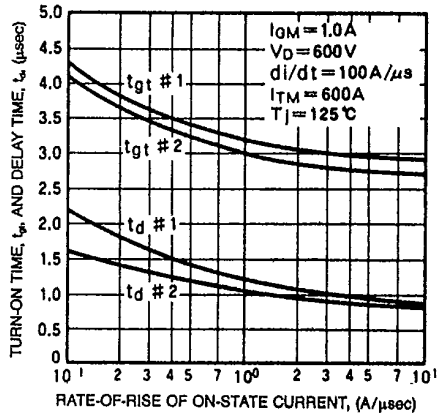

GATE TRIGGER CURRENT VS. PULSEWIDTH (TYPICAL)

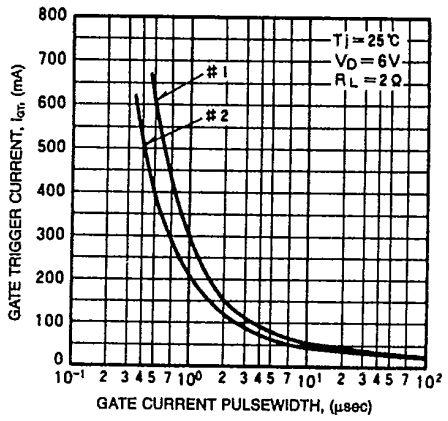

GATE CHARACTERISTICS

