

BATTERY DRIVE, FTP-60D Series

2" HIGH SPEED THERMAL PRINTER

FTP-62DMCL101, Easy Loading Method

■ OVERVIEW

The easy loading FTP-60D MCL Series is ultra compact high speed, battery driven thermal printer, printing on 2-inch wide paper (58mm) where platens are removable. Our original platen removal mechanism improved paper loading and maintenance.

The FTP-60D MCL series can be used for a variety of applications, such as portable terminals, POS, banking terminals, and measurement and medical equipment.



FTP-62D series

■ HIGHLIGHTS

- **Easy loading type**
Our unique platen removal mechanism improved paper loading and maintenance.
- **Ultra compact**
Height 19 mm, width 69.5 mm, depth 46 mm for the 2 inch model.
- **High speed printing**
It can print at 100 mm/s (at 9.5VDC) maximum.
- **High resolution printing**
8 dots/mm of resolution printing is possible.
- **RoHS compliant**

■ PART NUMBERS

Item		Part Number
Printer mechanism		FTP-62DMCL101 (2-inch wide paper: 58mm) without platen open detect switch
LSI for driving		TBA TBA
Interface Board	Parallel	TBA (Centronics)
	Serial	TBA (RS 232C)
	USB	TBA (V2.0)
Interface Cables	Parallel	FTP-628Y20 2
	Serial	FTP-628Y30 2
	USB	FTP-629Y301
Power cable	Head, motor, logic	FTP-628Y402

■ SPECIFICATIONS

Item	Specifications
Part number	FTP-628DMCL101
Printing method	Thermal-line dot method
Dot structure	384 dots/line
Dot pitch (Horizontal)	0.125 mm (8 dots/mm)—Dot density
Dot pitch (Vertical)	0.125 mm (8 dots/mm)—Line feed pitch
Effective printing area	48 mm
Number of columns	ANK 32 columns/line (maximum 12x 24 dot font)
Paper width	58 mm ⁺⁰ ₋₁
Paper thickness	60 to 85 μ m (some paper in this range may not be used because of paper characteristics)
Printing Speed	Maximum 100mm/sec. (800 dot line/sec.) at 9.5V
Character types	Alphanumeric, katakana: 159 types International and special characters: 195 types JIS Kanji level 1, level 2, non-Kanji (supported only when Kanji CG is mounted): about 6800 types
Character, dimensions (H×W), number of columns	12 × 24 dots, (1.5 × 3.0mm), 32 columns: ANK 24 × 24 dots, (3.0 × 3.0mm), 16 columns: ANK, Kanji 8 × 16 dots, (1.0 × 2.0 mm), 48 columns: ANK 16 × 16 dots, (2.0 × 2.0 mm), 24 columns: ANK, Kanji

■ SPECIFICATIONS

Item		Specification
		FTP-62DMCL101
Interface		Conforms to RS232C / USB
Operating Voltage	For print head	4.2 VDC to 9.5 V, average current 0.87A (0.93), peak value Printing ratio: 12.5%, printing speed 75mm/sec. at 7.2 V
	For motor	4.2 to 9.5VDC, 1A maximum
	For logic	3.0 to 5.25VDC, 0.1 A maximum
Dimensions	Printer mechanism	69.5 x 46 x 19mm (WxDxH)
	Interface board	TBA
Weight	Printer mechanism	Approximately 29g
	Interface board	TBA
Head life		Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 25% or less)
Operating environment	Operating temperature*	0°C to +50°C
	Operating humidity	20 to 85% RH (no condensation)
	Storage temperature	-20°C to +60°C (paper not included)
	Storage humidity	5 to 95% RH (no condensation)
Detection function	Head temperature detection	Detected by thermistor
	Paper out/mark detection	Detected by photo-interrupter
Recommended thermal sensitive paper		High sensitive paper: TF60KS-E4 (Nippon Paper)
		Standard paper: TK50KS-E (Nippon Paper) PD150R (Oji Paper) FTP-020P0701 (58mm)
		Medium life storage paper: TK60KS-F1 (Nippon Paper) FTP-020P0704 (58mm) PD170R (Oji Paper) P220VBB-1 (Mitsubishi Paper)
		Long life storage paper: PD160R-N (Oji Paper) AFP-235 (Mitsubishi Paper) TP50KJ-R (Nippon Paper) HA220AA (Nippon Paper)


*+5°C to +40°C printing density assurance range (-25 to 70°C capability)

■ FUNCTION

	Item		Item
1.	Test print function	8.	Mark detection function
2.	Paper out detection	9.	MCU operation abnormality detection
3.	Paper near end detection	10.	Power ON/OFF sequence protection
4.	Thermal head temperature abnormality detection	11.	Motor over-current protection
5.	Blow-out fuse detection	12.	Hardware timer
6.	Head voltage abnormality detection		
7.	Motor power saving function		

■ DIMENSIONS

1. Printer mechanism: 2- inch

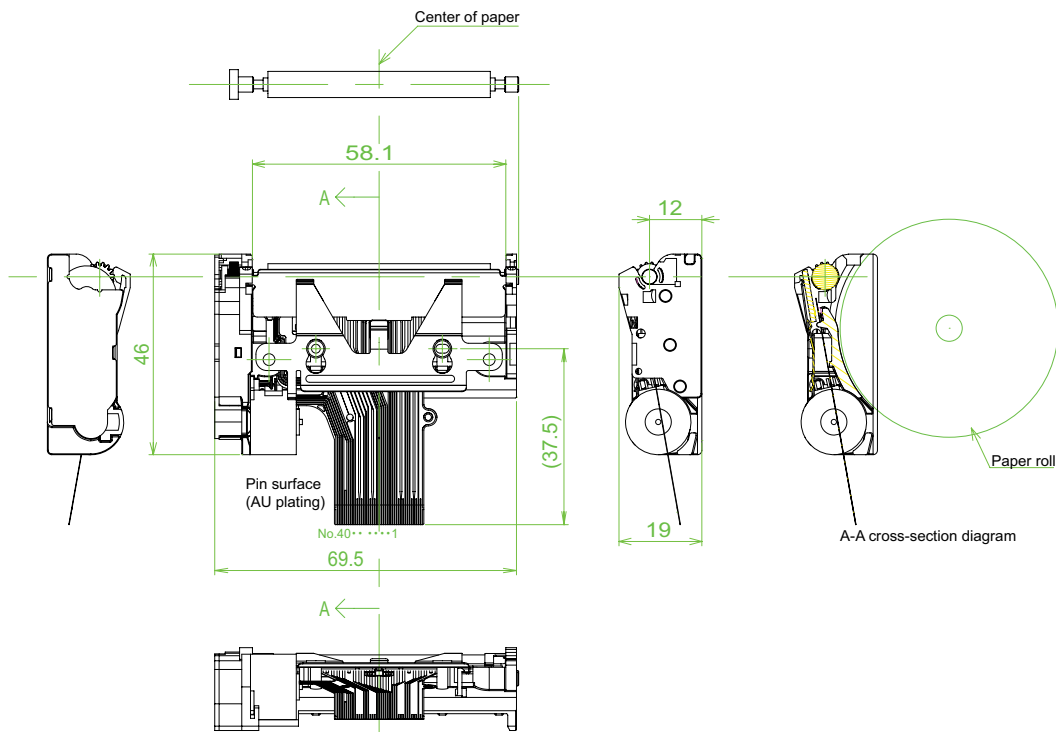

Unit: mm

Note: 1. Dimensions are nominal value (tolerance ± 5 unless otherwise specified).
2. Dimension listed in () is for reference

■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS

FTP-628 MCL101

Thermal head, control circuit side connector: 54104-4031 Molex or equivalent product

No.	Symbol	I/O	Signal Name
1	N.C.	-	No connection
2	N.C	-	
3	VH	I	Head drive power
4	VH	I	
5	VH	I	
6	VH	I	
7	DI	I	Data in
8	CLK	I	Clock
9	GND	-	Head ground
10	GND	-	
11	GND	-	
12	GND	-	
13	STB6	I	Strobe 6
14	STB5	I	Strobe 5
15	STB4	I	Strobe 4
16	Vdd	I	Logic power
17	TM	O	Thermistor
18	TM	O	
19	STB3	I	Strobe 3
20	STB2	I	Strobe 2
21	STB1	I	Strobe 1
23	GND	-	Head ground
24	GND	-	
25	GND	-	
26	/LAT	I	/ Data latch
27	DO	O	Data out
28	VH	I	Head drive power
29	VH	I	
30	VH	I	
31	VH	I	
32	N.C.	-	No connection
33	PHK	-	Cathode for photo interrupter
34	VSEN	I	Paper sensor power
35	PHE	O	Emitter for photo interruptor
36	N.C.	-	No connection
37	MT /A	I	Excitation signal A
38	MT /A	I	Excitation signal A
39	MT /B	I	Excitation signal B
40	MT /B	I	Excitation signal B

Do not plug or unplug the FPC when power is on.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141 8630, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@fcl.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcsl@fcsl.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. March 3, 2011.