

# POWER RELAY


## 1 POLE—16A (CADMIUM FREE CONTACTS TYPE)

### FTR-K2 SERIES

RoHS compliant

#### ■ FEATURES

- SPST-NO 16A
- HIGH ISOLATION  
Insulation Distance: Minimum 6mm between coil and contact  
Dielectric Strength: 4KV  
Surge Strength: 10KV
- TV-5 rating
- HEAT RESISTANCE, FLAMMABILITY  
Class B (130° C) insulation, flammability 94V-0
- CADMIUM FREE CONTACT FOR ECO-PROGRAM
- SAFETY STANDARDS  
UL, CSA, VDE approved, SEMKO (pending)  
UL/CSA TV-5 rating approved
- RoHS compliant since date code: 0437L2  
Please see page 8 for more information

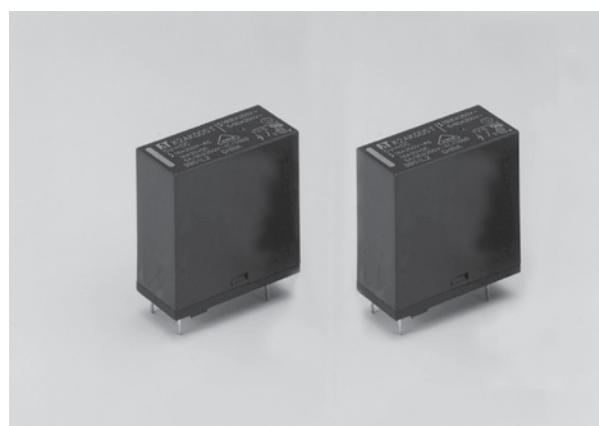

#### ■ ORDERING INFORMATION

[Example]      FTR-K2    A   K   012   T   -( )  
                     (a)    (b) (c)   (d)   (e)    (f)

|     |                      |                             |            |            |
|-----|----------------------|-----------------------------|------------|------------|
| (a) | Series name          | FTR-K2: FTR-K2 series (16A) |            |            |
| (b) | Contact arrangement  | A: 1 Form A (SPST-NO)       |            |            |
| (c) | Coil type            | K: Standard (530mW)         |            |            |
| (d) | Coil nominal voltage | 005 : 5DC                   | 012 : 12DC | 048 : 48DC |
|     |                      | 006 : 6DC                   | 018 : 18DC |            |
|     |                      | 009 : 9DC                   | 024 : 24DC |            |
| (e) | Contact material     | T: Silver-tin oxide (TV-5)  |            |            |
| (f) | Option               | OK: 1.0mm wide contact gap  |            |            |

# FTR-K2 Series

## ■ PART NUMBERS

Standard: 530 mW

| Ordering Part Number | Series | Contact  | Coil Power | Coil Voltage | Contact Material                    |
|----------------------|--------|----------|------------|--------------|-------------------------------------|
| FTR-K2AK005T         | FTR-K2 | 1 form A | K: 530mW   | 5            | T: Silver tin oxide<br>(TV-5 rated) |
| FTR-K2AK006T         |        |          |            | 6            |                                     |
| FTR-K2AK009T         |        |          |            | 9            |                                     |
| FTR-K2AK012T         |        |          |            | 12           |                                     |
| FTR-K2AK018T         |        |          |            | 18           |                                     |
| FTR-K2AK024T         |        |          |            | 24           |                                     |
| FTR-K2AK048T         |        |          |            | 48           |                                     |

## ■ COIL DATA CHART

Standard Type (530mW)

| Coil Voltage | Nominal Voltage (VDC) | Max. Coil Voltage* <sup>1</sup> | Coil Resistance (±10%) | Must Operate Voltage* <sup>2</sup> | Must Release Voltage* <sup>2</sup> |
|--------------|-----------------------|---------------------------------|------------------------|------------------------------------|------------------------------------|
| 005          | 5                     | 8.5 VDC                         | 47 Ω                   | 3.5 VDC                            | 0.25 VDC                           |
| 006          | 6                     | 10.2 VDC                        | 68 Ω                   | 4.2 VDC                            | 0.3 VDC                            |
| 009          | 9                     | 15.3 VDC                        | 155 Ω                  | 6.3 VDC                            | 0.45 VDC                           |
| 012          | 12                    | 20.4 VDC                        | 270 Ω                  | 8.4 VDC                            | 0.6 VDC                            |
| 018          | 18                    | 30.6 VDC                        | 610 Ω                  | 12.6 VDC                           | 0.9 VDC                            |
| 024          | 24                    | 40.8 VDC                        | 1,110Ω                 | 16.8 VDC                           | 1.2 VDC                            |
| 048          | 48                    | 81.6 VDC                        | 4,400 Ω                | 33.6 VDC                           | 2.4 VDC                            |

Note: All values in the table are measured at 20°C.

\*1: No contact current at 20°C

\*2: Specified values are subject to pulse wave voltage

# FTR-K2 Series

## ■ SPECIFICATIONS

|            |                                   |                   |                                            |
|------------|-----------------------------------|-------------------|--------------------------------------------|
| Item       |                                   |                   | FTR-K2AK ( )T                              |
| Contact    | Arrangement                       |                   | 1 form A (SPST-NO)                         |
|            | Material                          |                   | Silver tin oxide                           |
|            | Resistance (initial)              |                   | Maximum 100 mΩ (at 6VDC, 1A)               |
|            | Rating (resistive)                |                   | 250 VAC / 30 VDC / 16A                     |
|            | Maximum Carrying Current          |                   | 16A                                        |
|            | Maximum Switching Rating          |                   | 4000VA / 480W                              |
|            | Maximum Switching Voltage         |                   | 400VAC / 300VDC                            |
|            | Minimum Switching Load*           |                   | 100 mA, 5 VDC                              |
| Coil       | Nominal Power (20°C)              |                   | 530 mW                                     |
|            | Operate Power (20°C)              |                   | 260 mW                                     |
|            | Operating Temperature             |                   | -40°C to +70°C (no frost)                  |
| Time Value | Operate Time (at nominal voltage) |                   | Maximum 15 ms                              |
|            | Release Time (at nominal voltage) |                   | Maximum 5 ms                               |
| Life       | Mechanical                        |                   | 2 x 10 <sup>6</sup> operations minimum     |
|            | Electrical                        | AC Contact rating | 100 x 10 <sup>3</sup> operations min.      |
|            |                                   | DC Contact Rating | 100 x 10 <sup>3</sup> operations minimum   |
|            |                                   | Lamp load (TV-5)  | 25 x 10 <sup>3</sup> operations minimum    |
| Other      | Vibration Resistance              | Misoperation      | 10 to 55 Hz, at double amplitude of 1.5 mm |
|            |                                   | Endurance         | 10 to 55Hz, at double amplitude of 1.5 mm  |
|            | Shock Resistance                  | Misoperation      | 200m/s <sup>2</sup> (11±1ms)               |
|            |                                   | Endurance         | 1,000m/s <sup>2</sup> (11±1ms)             |
|            | Weight                            |                   | Approximately 13g                          |

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

# FTR-K2 Series

## ■ INSULATION

| Item                                               |                   | FTR-K2                      | Note                     |
|----------------------------------------------------|-------------------|-----------------------------|--------------------------|
| Resistance (initial)                               |                   | Minimum 1,000 MΩ 1 min.     | at 500 VDC               |
| Dielectric Strength                                | open contacts     | 1,000 VAC (50/60 Hz) 1 min. |                          |
|                                                    | coil and contacts | 4,000 VAC (50/60 Hz) 1 min. |                          |
| Surge Voltage (coil and contact)                   |                   | 10,000 V                    | 1.2 x 50μs standard wave |
| Clearance/Creepage                                 |                   | 6 mm / 6 mm                 |                          |
| Insulation (DIN EN61810-1 VDE0435)                 |                   |                             |                          |
| Voltage                                            |                   | 250 V                       |                          |
| Pollution                                          |                   | 2                           |                          |
| Isolation material group                           |                   | III a                       |                          |
| Isolation category / Reference voltage (VDE 0110b) |                   | B / 250 V                   |                          |





## ■ SAFETY STANDARDS

| Type  | Compliance                                          | Contact rating                                                                                                    |
|-------|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| UL    | UL 508<br>E63614                                    | Flammability: UL 94-V0 (plastics)<br>16A, 30VDC (resistive)<br>16A, 125VAC (resistive)<br>10A, 277VAC (resistive) |
| CSA   | C22.2 No. 14<br>LR 40304                            | 1/2 HP, 125VAC<br>1 HP, 277VAC<br>TV-5, 120 VAC<br>Pilot duty: A300                                               |
| VDE   | 0435, 0860                                          | 16A, 250 VAC (cosØ=1)<br>8A, 250 VAC cosØ=0.4)<br>18A, 30 VDC (0ms)<br>250VAC 5/80A inrush                        |
| SEMKO | EN 61058-1: 1992 AND A1<br>EN 61095:1993 and A1+A11 | 250 VAC, 10 (3) or 5/80<br>40T70                                                                                  |



Complies with CQC, NEMKO, DEMKO, FIMKO,

# FTR-K2 Series

## CHARACTERISTIC DATA

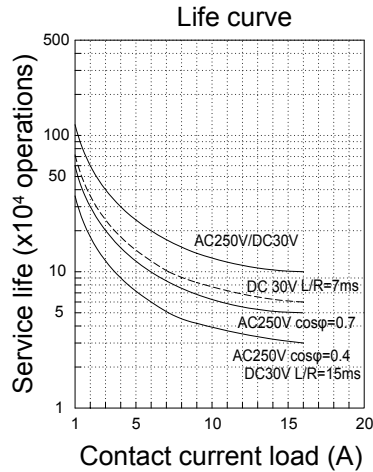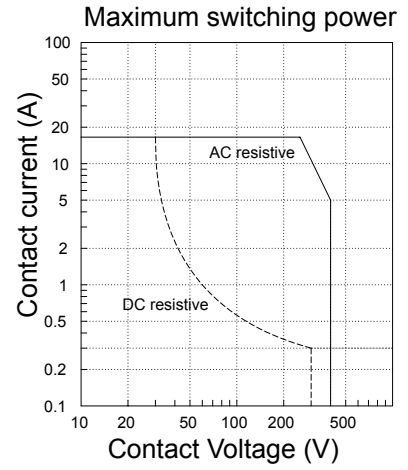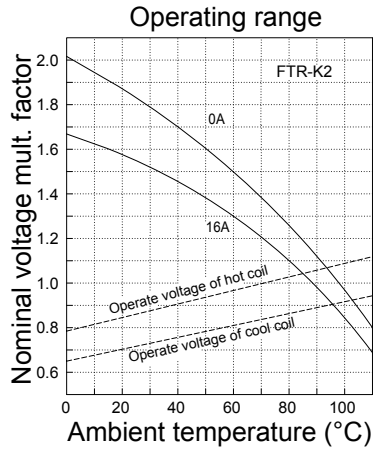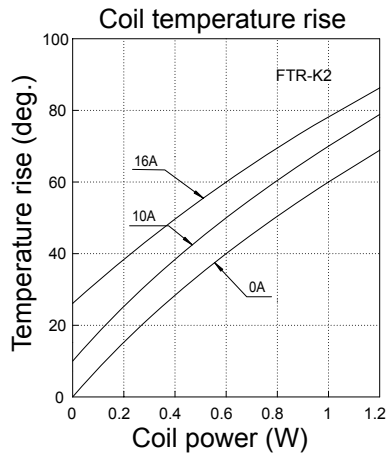


## REFERENCE DATA

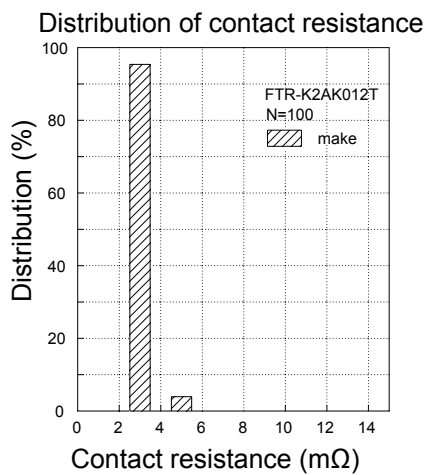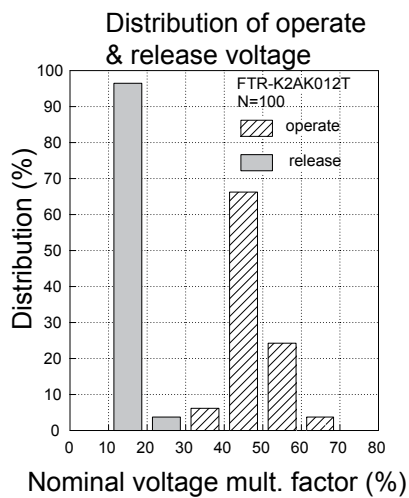


# FTR-K2 Series

## ■ DIMENSIONS


- **Dimensions**

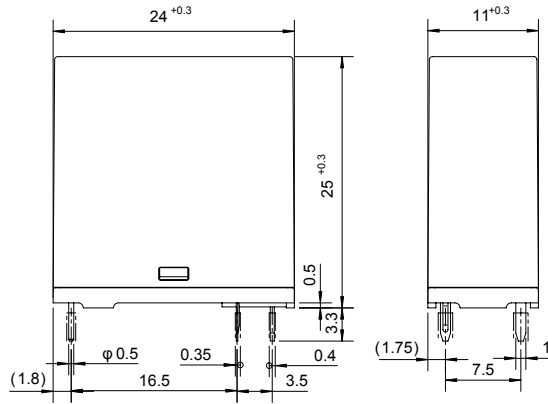

- Schematics (BOTTOM VIEW)



● **PC board mounting  
hole layout  
(BOTTOM VIEW)**

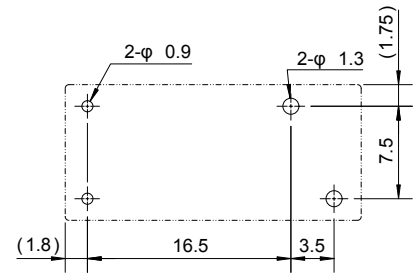

Unit: mm (in.)

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

#### Reflow Solder condition

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevice/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcsl@fcal.fujitsu.com](mailto:fcsl@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. October 20, 2008.