To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

FY5AEJ-03


HIGH-SPEED SWITCHING USE
Nch/Pch POWER MOSFET


FY5AEJ-03



- 4V DRIVE
- V_{DSS} ..... ±30V
- $r_{DS\ (ON)\ (MAX)}$ 30/65mΩ
- I_D 5/–4A

OUTLINE DRAWING Dimensions in mm

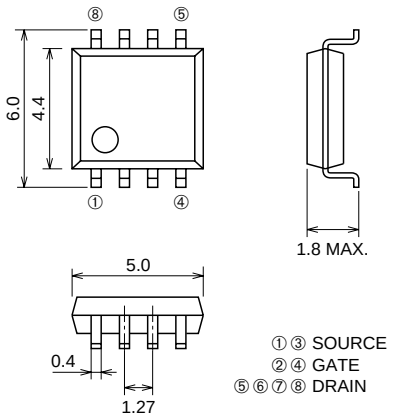

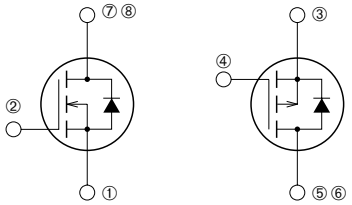

SOP-8

APPLICATION

Motor control, Lamp control, Solenoid control,
DC-DC converter, Li-ionbattery, notebook p/c, etc

MAXIMUM RATINGS (Tc = 25°C)

Symbol	Parameter	Conditions	Ratings		Unit
			n-ch	p-ch	
V_{DSS}	Drain-source voltage	V_{GS} = 0V	30	–30	V
V_{GSS}	Gate-source voltage	V_{DS} = 0V	±20	±20	V
I_D	Drain current		5	–4	A
I_{DM}	Drain current (Pulsed)		35	–28	A
I_{DA}	Avalanche current (Pulsed)	L = 10µH	5	–4	A
I_S	Source current		1.5	–1.5	A
I_{SM}	Source current (Pulsed)		6.0	–6.0	A
P_D	Maximum power dissipation		1.6	1.7	W
T_{ch}	Channel temperature		–55~+150		°C
T_{stg}	Storage temperature		–55~+150		°C
—	Weight	Typical value	0.07		g

RENESAS
Renesas Technology Corp.

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

FY5AEJ-03

HIGH-SPEED SWITCHING USE
Nch/Pch POWER MOSFET

ELECTRICAL CHARACTERISTICS (Tch = 25°C)

N-ch

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
$V_{(BR)\ DSS}$	Drain-source breakdown voltage	I_D = 1mA, V_{GS} = 0V	30	—	—	V
I_{GSS}	Gate-source leakage current	V_{GS} = ±20V, V_{DS} = 0V	—	—	±0.1	μA
I_{DSS}	Drain-source leakage current	V_{DS} = 30V, V_{GS} = 0V	—	—	0.1	mA
$V_{GS\ (th)}$	Gate-source threshold voltage	I_D = 1mA, V_{DS} = 10V	1.0	1.5	2.0	V
$r_{DS\ (ON)}$	Drain-source on-state resistance	I_D = 5A, V_{GS} = 10V	—	23	30	mΩ
$r_{DS\ (ON)}$	Drain-source on-state resistance	I_D = 2A, V_{GS} = 4V	—	40	55	mΩ
$\lvert y_{fs} \rvert$	Forward transfer admittance	I_D = 5A, V_{DS} = 10V	—	9	—	S
C_{iss}	Input capacitance	V_{DS} = 10V, V_{GS} = 0V, f = 1MHz	—	550	—	pF
C_{oss}	Output capacitance		—	220	—	pF
C_{rss}	Reverse transfer capacitance		—	115	—	pF
$t_{d\ (on)}$	Turn-on delay time	V_{DD} = 15V, I_D = 2A, V_{GS} = 10V, R_{GEN} = R_{GS} = 50Ω	—	12	—	ns
t_r	Rise time		—	20	—	ns
$t_{d\ (off)}$	Turn-off delay time		—	40	—	ns
t_f	Fall time		—	40	—	ns
V_{SD}	Source-drain voltage	I_S = 1.5A, V_{GS} = 0V	—	0.75	1.10	V
$R_{th\ (ch-a)}$	Thermal resistance	Channel to ambiet	—	—	78.1	°C/W
t_{rr}	Reverse recovery time	I_S = 1.5A, di_S/dt = –50A/μs	—	100	—	ns

P-ch

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
$V_{(BR)\ DSS}$	Drain-source breakdown voltage	I_D = 1mA, V_{GS} = 0V	–30	—	—	V
I_{GSS}	Gate-source leakage current	V_{GS} = ±20V, V_{DS} = 0V	—	—	±0.1	μA
I_{DSS}	Drain-source leakage current	V_{DS} = –30V, V_{GS} = 0V	—	—	–0.1	mA
$V_{GS\ (th)}$	Gate-source threshold voltage	I_D = –1mA, V_{DS} = –10V	–1.5	–2.0	–2.5	V
$r_{DS\ (ON)}$	Drain-source on-state resistance	I_D = –4A, V_{GS} = –10V	—	50	65	mΩ
$r_{DS\ (ON)}$	Drain-source on-state resistance	I_D = –2A, V_{GS} = –4V	—	90	135	mΩ
$\lvert y_{fs} \rvert$	Forward transfer admittance	I_D = –4A, V_{DS} = –10V	—	6	—	S
C_{iss}	Input capacitance	V_{DS} = –10V, V_{GS} = 0V, f = 1MHz	—	870	—	pF
C_{oss}	Output capacitance		—	230	—	pF
C_{rss}	Reverse transfer capacitance		—	110	—	pF
$t_{d\ (on)}$	Turn-on delay time	V_{DD} = –15V, I_D = –2A, V_{GS} = –10V, R_{GEN} = R_{GS} = 50Ω	—	10	—	ns
t_r	Rise time		—	10	—	ns
$t_{d\ (off)}$	Turn-off delay time		—	60	—	ns
t_f	Fall time		—	30	—	ns
V_{SD}	Source-drain voltage	I_S = –1.5A, V_{GS} = 0V	—	–0.88	–1.20	V
$R_{th\ (ch-a)}$	Thermal resistance	Channel to ambiet	—	—	73.5	°C/W
t_{rr}	Reverse recovery time	I_S =1.5A, di_S/dt = 50A/μs	—	100	—	ns


PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

FY5AEJ-03


HIGH-SPEED SWITCHING USE
Nch/Pch POWER MOSFET

PERFORMANCE CURVES (N-ch)


POWER DISSIPATION DERATING CURVE

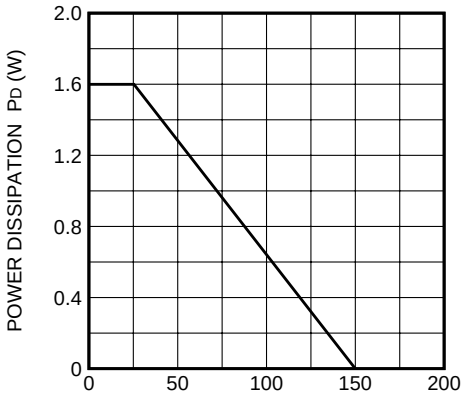


MAXIMUM SAFE OPERATING AREA

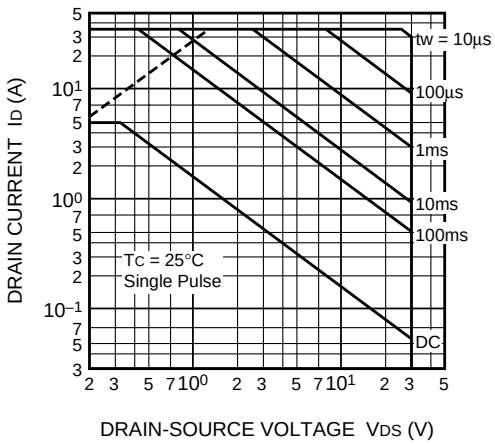


OUTPUT CHARACTERISTICS (TYPICAL)

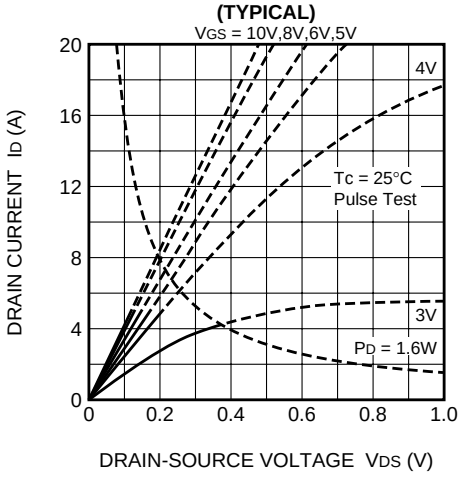


OUTPUT CHARACTERISTICS (TYPICAL)

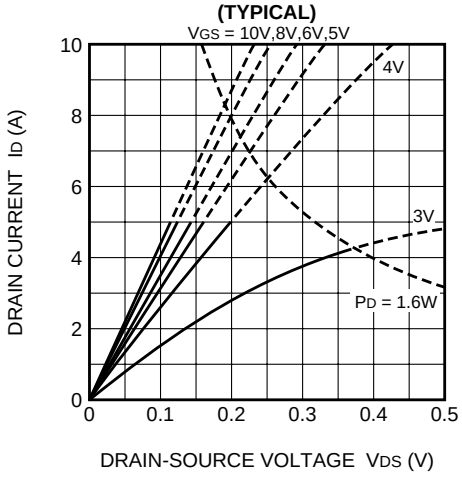

ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

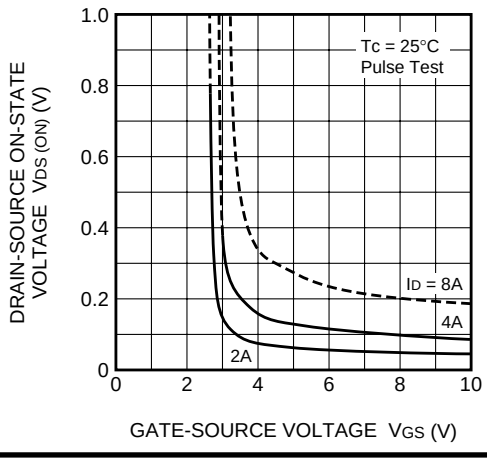

ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

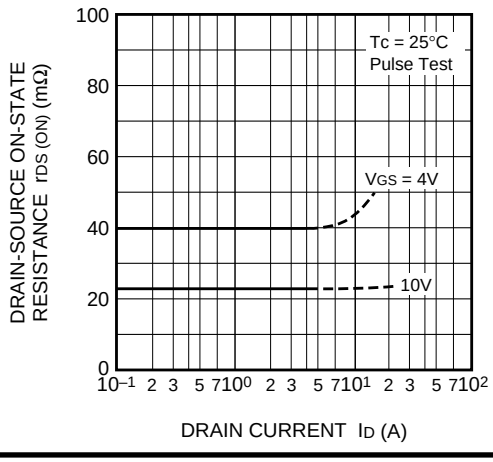


RENESAS
Renesas Technology Corp.

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.


FY5AEJ-03

HIGH-SPEED SWITCHING USE
Nch/Pch POWER MOSFET


TRANSFER CHARACTERISTICS (TYPICAL)

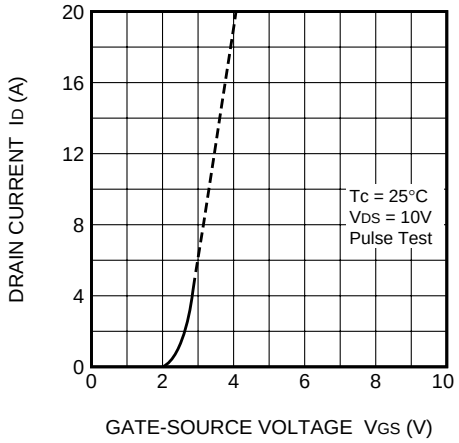


FORWARD TRANSFER ADMITTANCE VS.DRAIN CURRENT (TYPICAL)

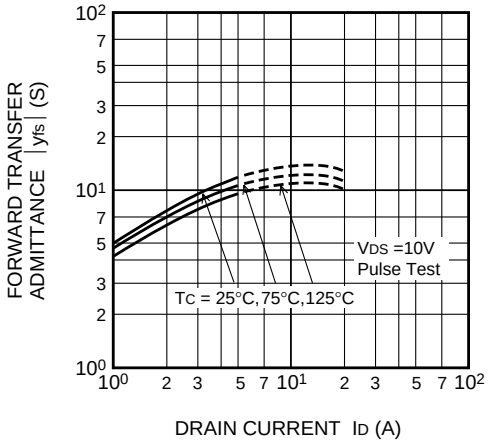


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

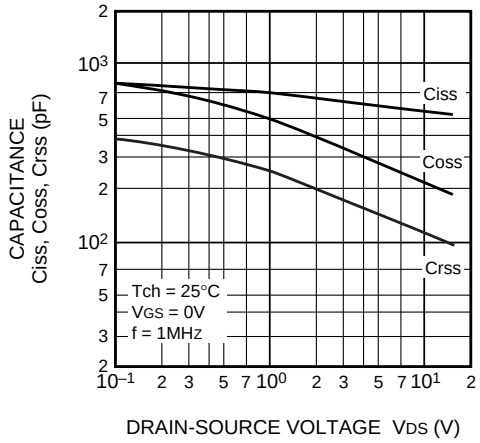


SWITCHING CHARACTERISTICS (TYPICAL)

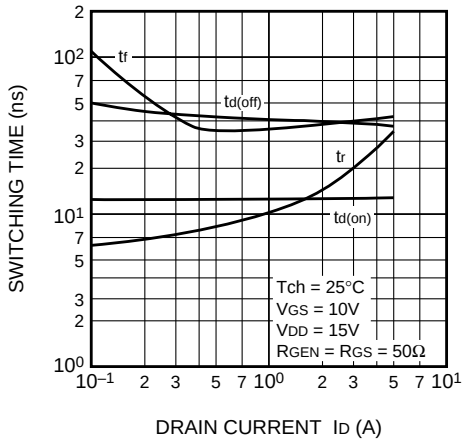

GATE-SOURCE VOLTAGE VS.GATE CHARGE (TYPICAL)

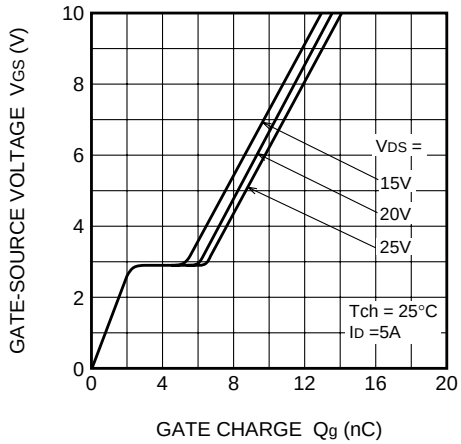


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

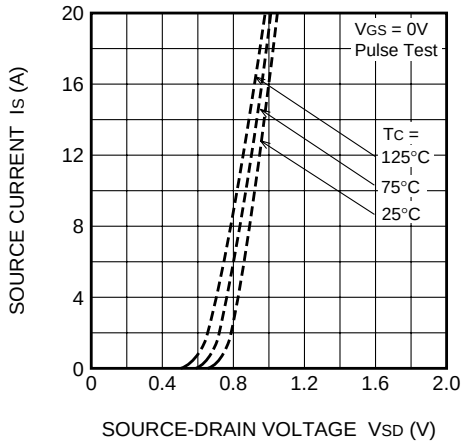


RENESAS
Renesas Technology Corp.

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.


ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

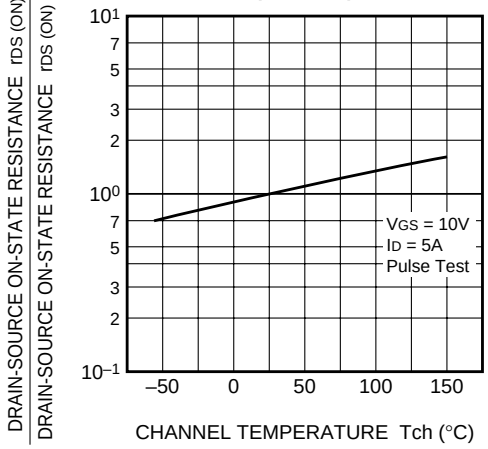


THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

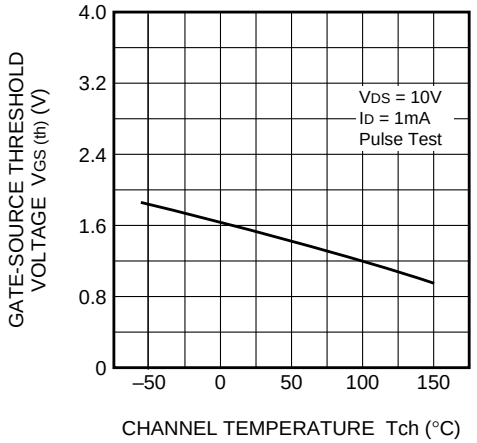

BREAKDOWN VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

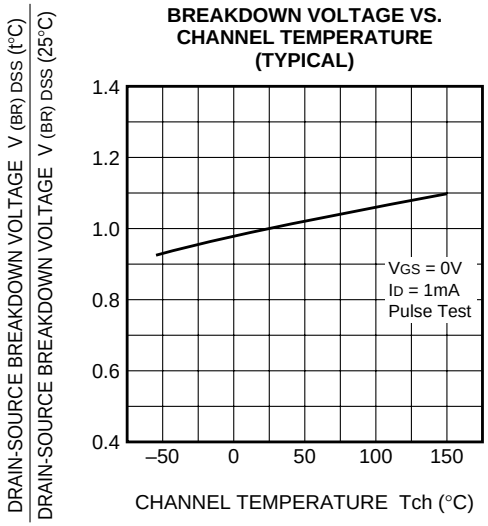

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

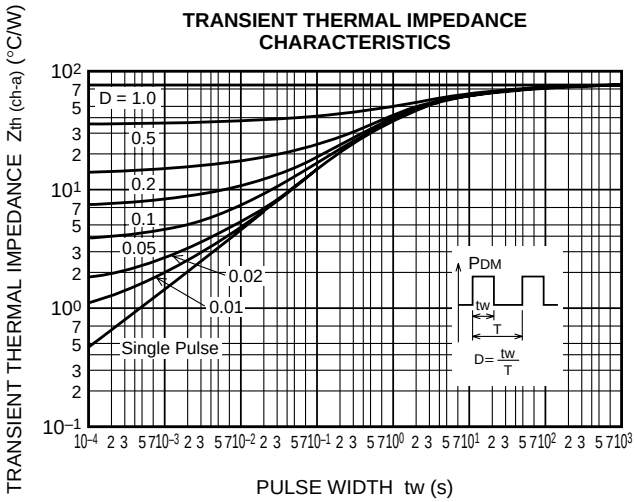

RENESAS
Renesas Technology Corp.


PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

FY5AEJ-03


HIGH-SPEED SWITCHING USE
Nch/Pch POWER MOSFET

PERFORMANCE CURVES (P-ch)


POWER DISSIPATION DERATING CURVE

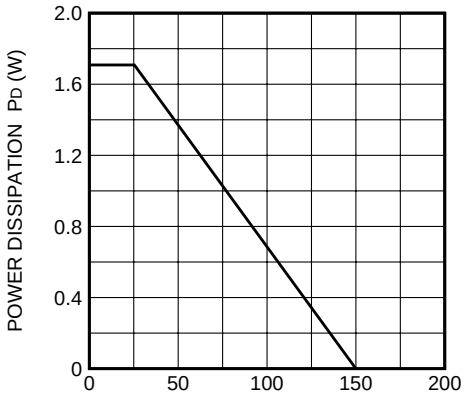


MAXIMUM SAFE OPERATING AREA

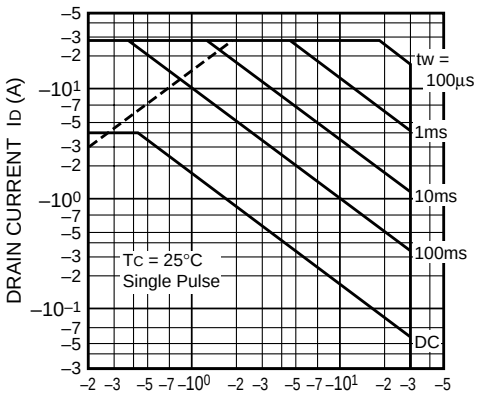


OUTPUT CHARACTERISTICS (TYPICAL)

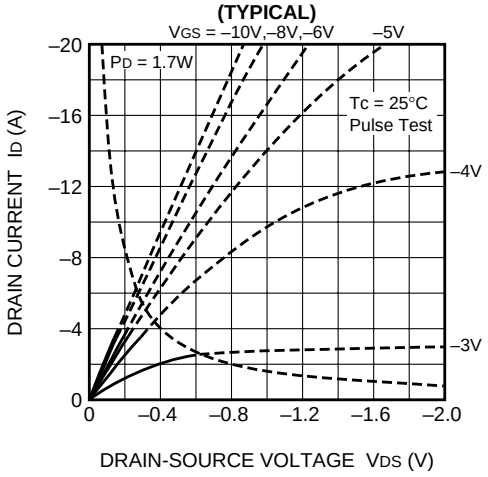


OUTPUT CHARACTERISTICS (TYPICAL)

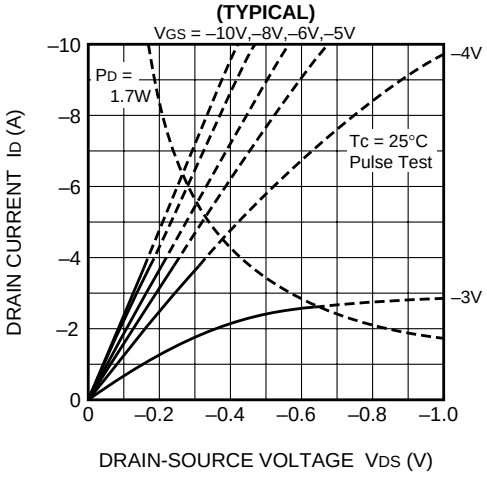

ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

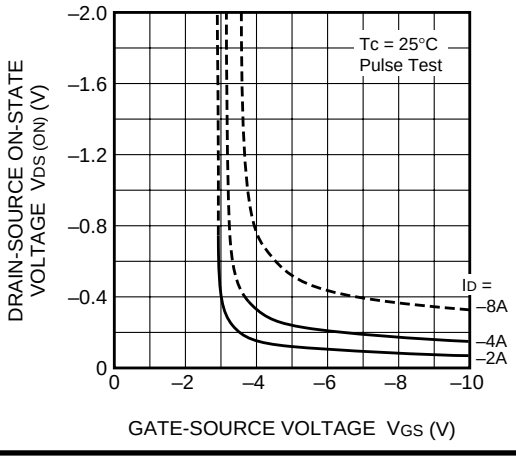

ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

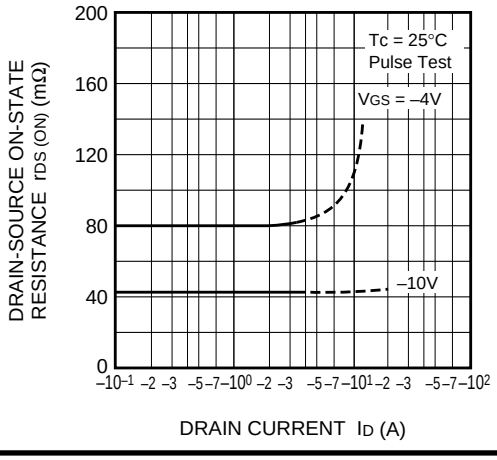


RENESAS
Renesas Technology Corp.

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.


FY5AEJ-03

HIGH-SPEED SWITCHING USE
Nch/Pch POWER MOSFET


TRANSFER CHARACTERISTICS (TYPICAL)

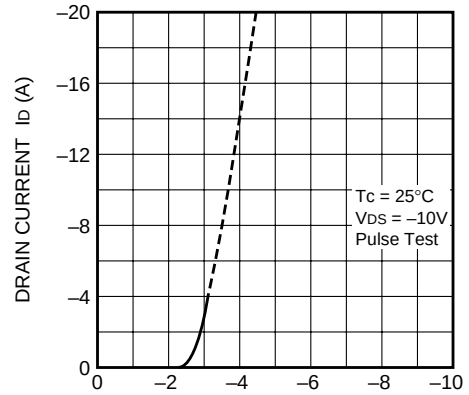


FORWARD TRANSFER ADMITTANCE VS.DRAIN CURRENT (TYPICAL)

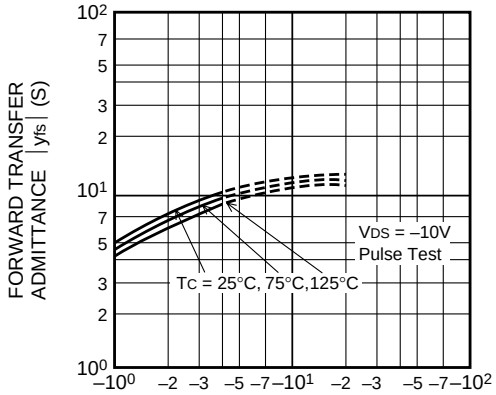


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

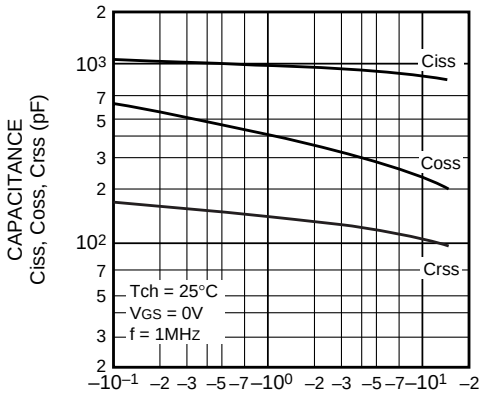


SWITCHING CHARACTERISTICS (TYPICAL)

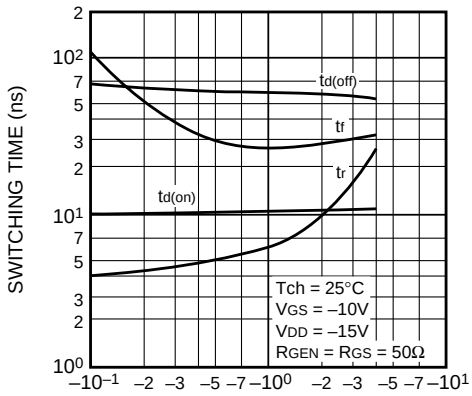

GATE-SOURCE VOLTAGE VS.GATE CHARGE (TYPICAL)

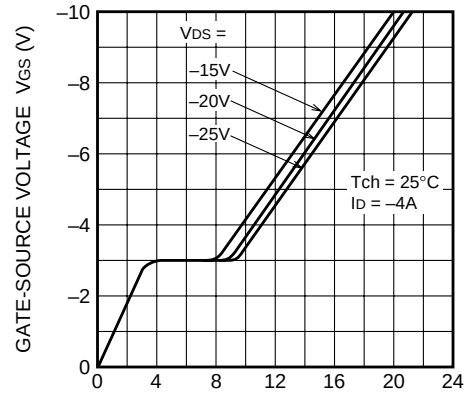


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

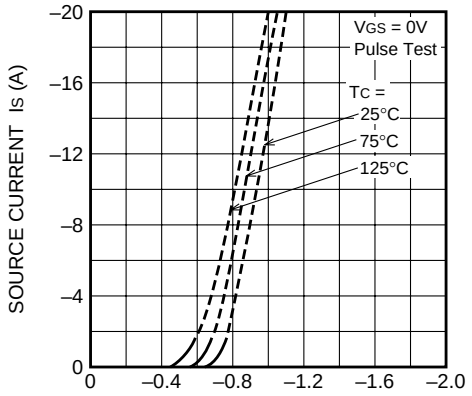


PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.


ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

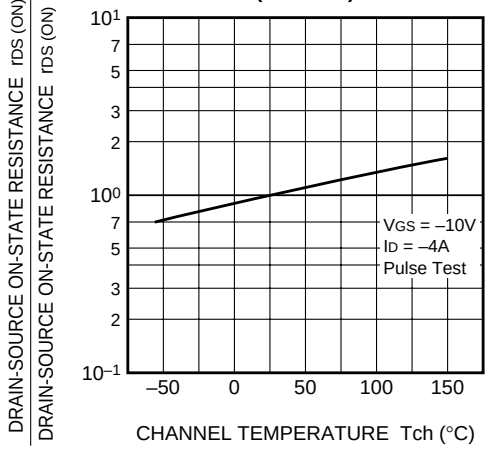


THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

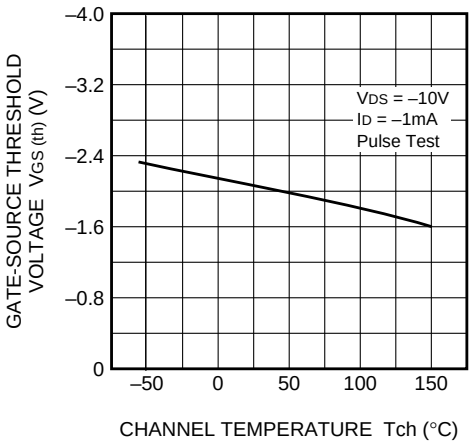

BREAKDOWN VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

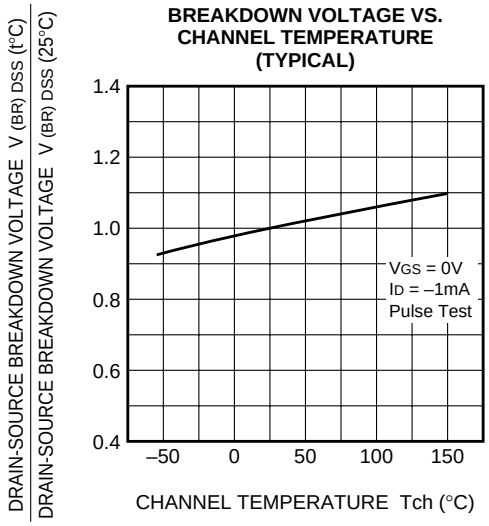

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

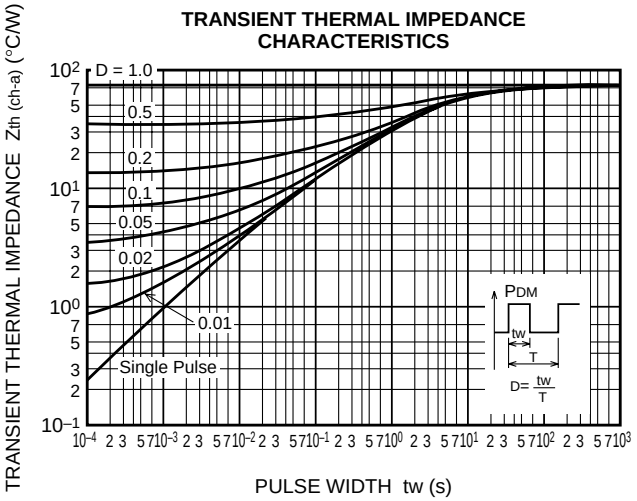

RENESAS
Renesas Technology Corp.