


GaAsP photodiode

Diffusion type

Red sensitivity extended type

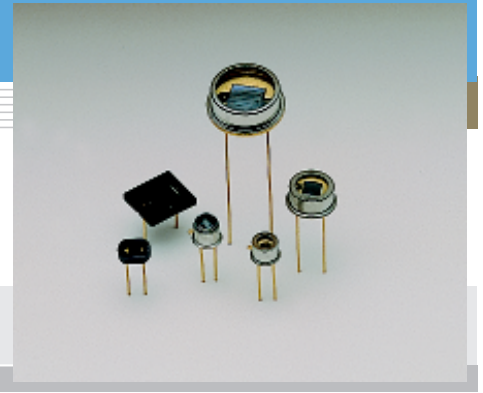

Features

- Low dark current
- High stability
- Red sensitivity extended type

Applications

- Analytical instruments
- Color identification

■ General ratings / Absolute maximum ratings


Type No.	Dimensional outline/ Window material *	Package	Active area size (mm)	Effective active area (mm ²)	Absolute maximum ratings		
					Reverse voltage VR Max. (V)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)
G1735	①/K	TO-18	1.3 × 1.3	1.66	5	-30 to +80	-40 to +85
G1736	②/K	TO-5	2.7 × 2.7	7.26			
G1737	③/K	TO-8	5.6 × 5.6	29.3			
G1738	④/R	Ceramic	1.3 × 1.3	1.66			
G1740	⑤/R	Ceramic	5.6 × 5.6	29.3			
G3297	⑥/L	TO-18	1.3 × 1.3	1.66			

■ Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)


Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λ_p (nm)	Photo sensitivity S (A/W)			Short circuit current Isc 100 k		Dark current Id Max.		Temp. coefficient of Id Tcid (times/°C)	Rise time tr VR=0 V RL=1 k Ω (μ s)	Terminal capacitance Ct VR=0 V f=10 kHz (pF)	Shunt resistance Rsh VR=10 mV		NEP (W/Hz ^{1/2})
			λ_p	GaP LED 560 nm	He-Ne laser 633 nm			VR=10 mV (pA)	VR=1 V (pA)				Min. (G Ω)	Typ. (G Ω)	
G1735	400 to 760	710	0.4	0.22	0.29	0.2	0.25	2	20	1.07	0.5	250	5	25	2.0×10^{-15}
G1736						0.8	1.1	5	50		1.8	1200	2	15	3.2×10^{-15}
G1737						4	5	10	100		10	4500	1	5	4.5×10^{-15}
G1738						0.2	0.25	2	20		0.5	250	5	25	2.0×10^{-15}
G1740						4	5	10	100		10	4500	1	5	4.5×10^{-15}
G3297						1.5	1.8	2	20		0.5	250	5	25	2.0×10^{-15}

* Window material K: borosilicate glass, L: lens type borosilicate glass, R: resin coating


■ Spectral response

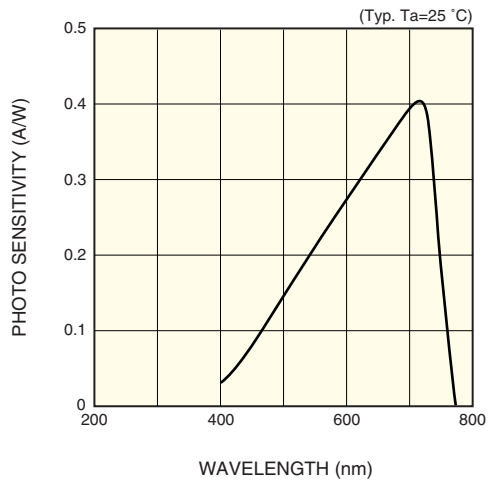


■ Photo sensitivity temperature characteristic

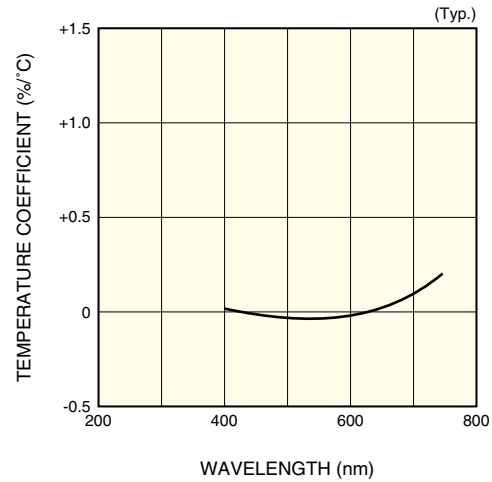


■ Rise time vs. load resistance

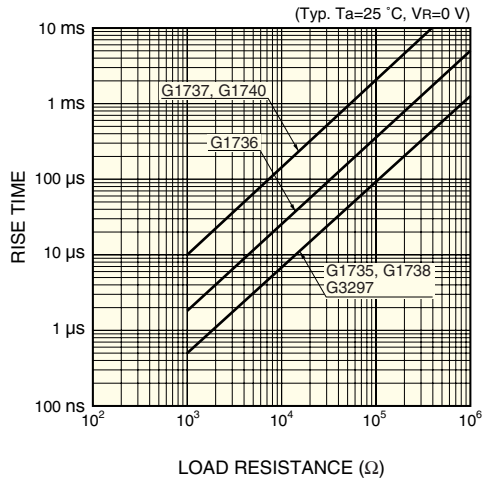


■ Dark current vs. reverse voltage

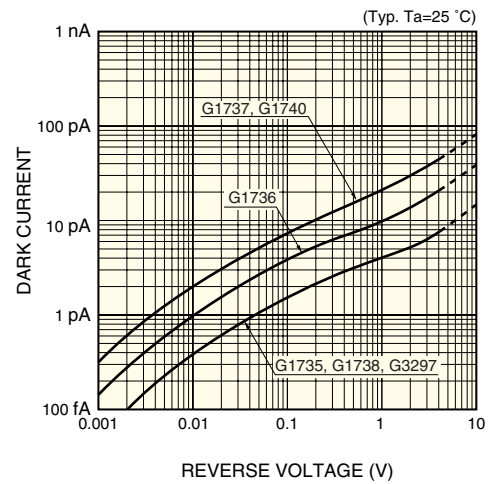

■ Shunt resistance vs. ambient temperature

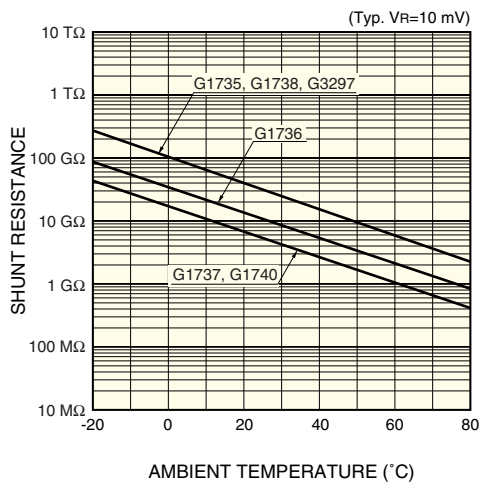


■ Short circuit current linearity

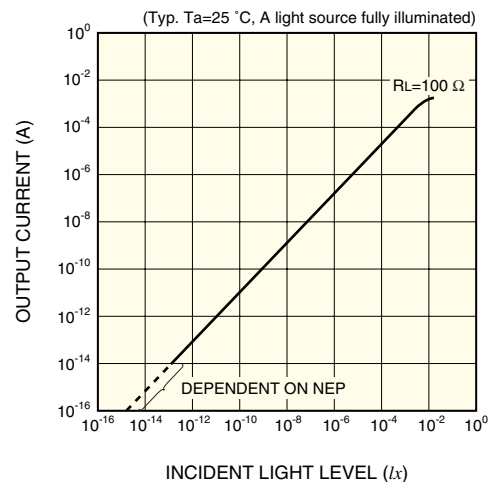

■ Dimensional outlines (unit: mm)

① G1735

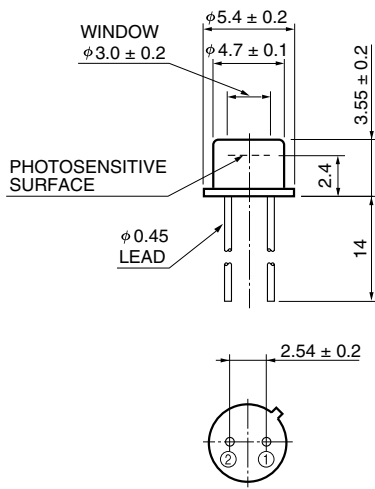


CONNECTED
TO CASE



Borosilicate glass window may extend a maximum of 0.1 mm beyond the upper surface of the cap.

KGPD0012EA

② G1736

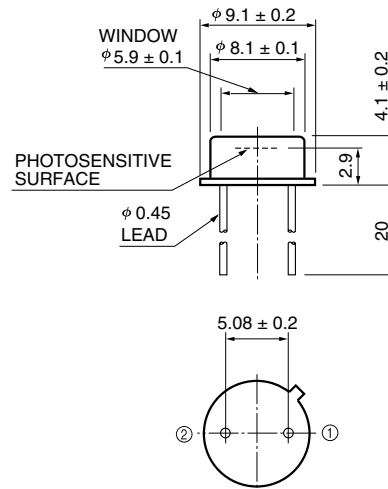


CONNECTED
TO CASE



Borosilicate glass window may extend a maximum of 0.2 mm beyond the upper surface of the cap.

KGPD0013EA

③ G1737

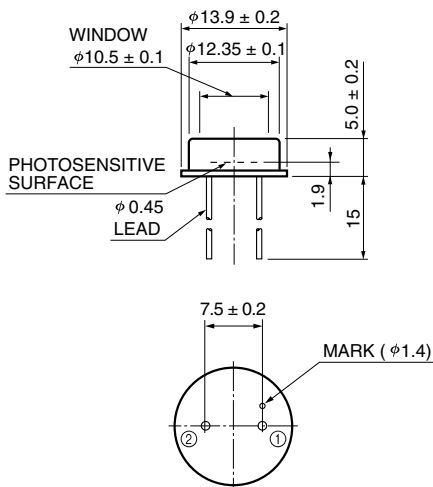


CONNECTED
TO CASE



Borosilicate glass window may extend a maximum of 0.2 mm beyond the upper surface of the cap.


KGPD0014EA

④ G1738

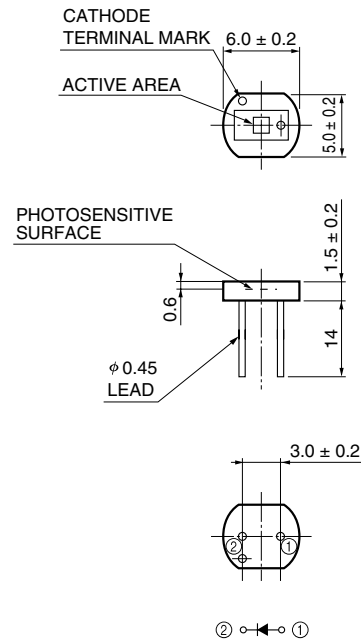


KGPD0002EA

⑤ G1740

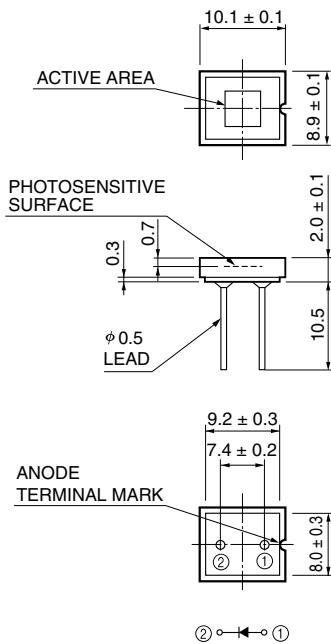

KGPD A0010EA

⑥ G3297

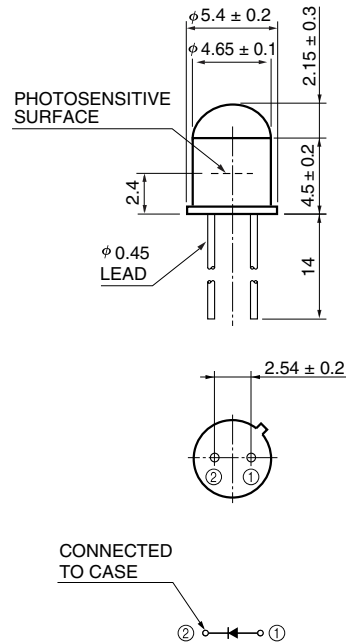

KGPD A0009EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.