

FEATURES :

- Universal Input 90~264VAC
- High Efficiency Up To 85%
- Protection: Short Circuit /Overload/Over Voltage
- Fully Encapsulated Plastic Case
- Internal Input Filter
- 3 Years Warranty
- ROHS Compliant

YUAN DEAN SCIENTIFIC




AC-DC Converter

GA015 SERIES

13~19Watt


3KV Isolated

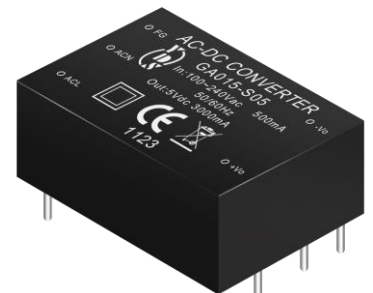Single & Dual Output
Module

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Rated Input Voltage	V_{o,I_o} nom		100~240		Vac
Voltage Range	V_{o,I_o} nom	AC in	90	264	Vac
		DC in	120	370	Vdc
Line Frequency	V_i nom, I_o nom	47	50/60	63	Hz
Inrush Current	I_o nom	V_i :115VAC		10	A
		V_i :230VAC		20	A
Input Fuse	VDE/UL/CCC FUSE 2.5A/250V (Slow blow)				

Temperature Derating Graph

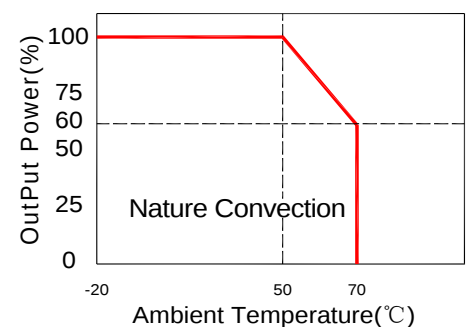

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288
E-MAIL : ydsweb@yds.com.tw

Rev:0 2017/9/11

Output Specifications

Parameters	Conditions		Min	Typ	Max	Units
Output Voltage Accuracy	Vi nom,Io nom	3.3V,5V Models			±3	%
		12...48V Models			±2	%
	Dual Output				±5	%
Minimum Load	Vi nom	Single Output Models	0			%
		Dual Output Models (each output)	20			%
Line Regulation	Io nom,Vi min...Vi max				±1	%
Load Regulation	Io min~Io nom	Single Output Models			±2	%
		Dual Output Models			±5	%
Transient Recovery time	Vi nom,Io nom = ↔0.5 Io nom			1000		us
Protection	Over load		Above 110% rated output power			
			Protection type: Recovers automatically after fault condition is removed			
	Short circuit		Recovers automatically after fault condition is removed			
	Over Voltage (Main Output)		120%-150% rated output Voltage			
			Protection type: Zener diode clamp			

Note :

Ripple & noise is measured by using 20 MHz bandwidth, measured with a 47uf paralleled with a high-frequency 0.47uf capacitor across each output by full load.

General Specifications


Parameters	Conditions	Min	Typ	Max	Units
Switching Frequency	Vi nom, Io nom		65		KHz
Isolation Voltage	Input / Output		3KVac/ 5mA/5Secs		
Isolation Resistance	Input / Output, @500 Vdc	100			MΩ
Operating Temperature	Operating at Vi nom, Io nom	-20		+70	°C
Derating	Vi nom, Io nom +51 to 71°C			2	%/°C
Storage Temperature	Non Operational	-40		+85	°C
Relative Humidity	Vi nom, Io nom			95	% RH
Safety Standards	EN60950-1 approved				
EMI Conduction & Radiation	Compliance to EN55022				
EMS Immunity	Compliance to EN55024				
Dimension	L69.85x W48.01 x H23.37mm L2.75x W1.89 x H0.92 inches				
Cooling	Free air convection				

Part Number


$\frac{G}{A} \frac{A}{B} \frac{015}{C} - \frac{S}{D} \frac{03}{E}$

A: Series
B: Package
C: Output Watt
D: Single (S) Dual (D)
E: Output Voltage


Circuit Schematic(1)

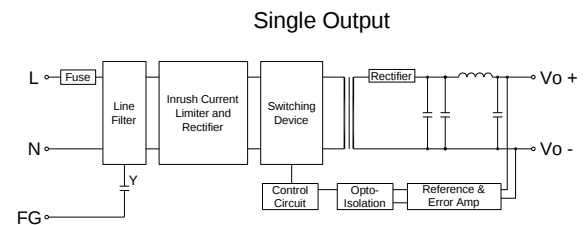


Circuit Schematic(2)

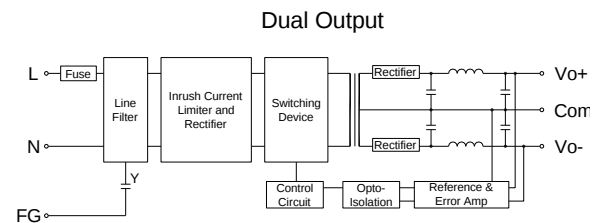

Circuit Schematic(3)

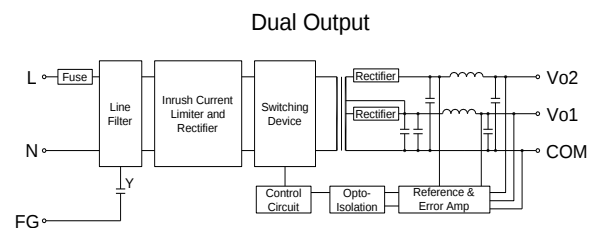

Markings and Dimensions

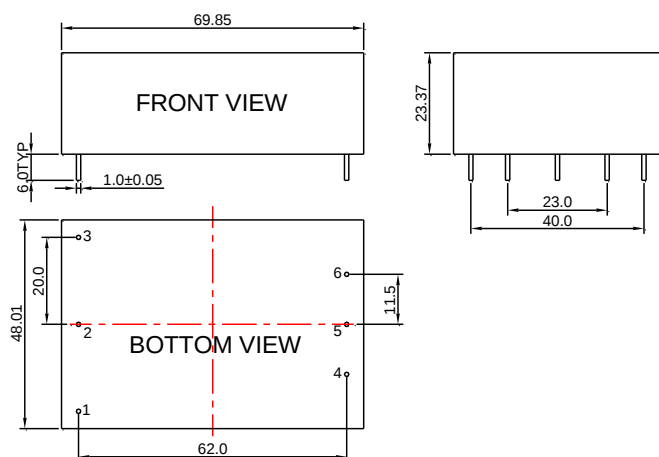

PIN	Model		
	Single	Dual	Dual
1	FG	FG	FG
2	ACN	ACN	ACN
3	ACL	ACL	ACL
4	-Vo	-Vo	+Vo2
5	NO PIN	Com	Com
6	+Vo	+Vo	+Vo1

Unit : mm Unless otherwise specified, all tolerances are ± 0.50