

Fixed Attenuators

GAT+ SERIES

50Ω 0 to 30dB DC to 8 GHz*

Features

- miniature package MCLP™ 3X3 mm
- specified to 8 GHz, useable to 10 GHz
- excellent VSWR, 1.15:1 typ. to 8 GHz

Applications

- cellular
- PCS
- communication
- radar
- defense



CASE STYLE: FG873

PRICE: \$2.35 QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix has been added in order to identify RoHS Compliance. There has been no change to the model's material, form, fit, or function. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications at 25°C

MODEL NO.	FREQ. RANGE (GHz)	ATTENUATION (dB)					VSWR (:1)					MAX. INPUT POWER (W)
		Flatness										
		DC - 1 GHz	DC - 5*GHz	5 - 8 GHz		DC - 1 GHz	DC - 5*GHz	5 - 8 GHz				
	f_L - f_U	Nom.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Max.	Typ.		
GAT-0+	DC-8	0±0.2	0.1	0.2	0.2	1.05	1.2	1.15	1.35	1.25	0.5	
GAT-1+	DC-8	1±0.2	0.1	0.2	0.2	1.05	1.2	1.15	1.3	1.3	0.5	
GAT-2+	DC-8	2±0.2	0.1	0.2	0.2	1.05	1.2	1.15	1.3	1.3	0.5	
GAT-3+	DC-8	3±0.3	0.1	0.2	0.2	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-4+	DC-8	4±0.3	0.1	0.2	0.2	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-5+	DC-8	5±0.3	0.1	0.2	0.2	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-6+	DC-8	6±0.3	0.1	0.2	0.3	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-7+	DC-8	7±0.3	0.1	0.2	0.3	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-8+	DC-8	8±0.4	0.1	0.2	0.3	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-9+	DC-8	9±0.4	0.1	0.2	0.3	1.05	1.2	1.15	1.3	1.3	0.5	
GAT-10+	DC-8	10±0.4	0.15	0.2	0.3	1.05	1.2	1.15	1.3	1.3	0.5	
GAT-12+	DC-8	12±0.4	0.15	0.2	0.3	1.05	1.2	1.15	1.3	1.3	0.5	
GAT-15+	DC-8	15±0.4	0.15	0.3	0.3	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-20+	DC-8	20±0.4	0.15	0.2	0.2	1.05	1.2	1.15	1.3	1.35	0.5	
GAT-30+	DC-3	30±0.9	0.5	1.2	—	1.05	1.2	1.15	1.3	—	0.5	

* Up to 3 GHz for GAT-30+

Flatness=variation overband divided by 2


Pin Connections

PORT	hl
INPUT	1
OUTPUT	3
GROUND	2,4

Maximum Ratings

Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C


Outline Drawing

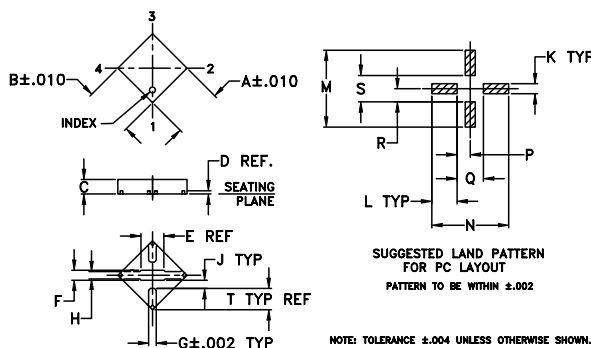

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
0.118	0.118	0.035	0.008	0.07	0.024	0.017	0.018	0.018
3.00	3.00	0.89	0.20	1.78	0.61	0.43	0.46	0.46
K	L	M	N	P	Q	R	S	T
0.024	0.061	0.186	0.186	0.032	0.064	0.032	0.064	0.05
0.61	1.55	4.72	4.72	0.81	1.63	0.81	1.63	1.27
								20.0

Demo Board MCL P/N: TB-154 Suggested PCB Layout (PL-126)

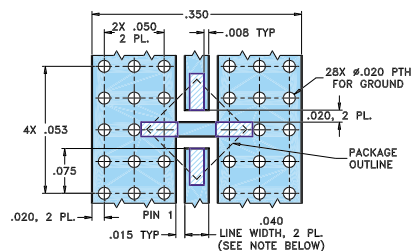

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-GAT	45	5 of ea. GAT-2+,3+,4+,6+,8+,10+,15+,20+,30+99.95	
K2-GAT	25	5 of ea. GAT-3+,6+,10+,15+,20+	59.95

Typical Performance Curves

GAT+ SERIES

