

GB05MPS17-247

1700 V SiC MPS™ Diode

Silicon Carbide Power Schottky Diode



V_{RRM}	=	1700 V
I_F ($T_C = 135^\circ\text{C}$)	=	16 A
Q_C	=	55 nC


Features

- High Avalanche (UIS) Capability
- Enhanced Surge Current Capability
- 175 °C Maximum Operating Temperature
- Temperature Independent Switching Behavior
- Positive Temperature Coefficient Of V_F
- Extremely Fast Switching Speeds
- Superior Figure of Merit Q_C/I_F

Advantages

- Low Standby Power Losses
- Improved Circuit Efficiency (Lower Overall Cost)
- Low Switching Losses
- Ease of Paralleling Devices without Thermal Runaway
- Smaller Heat Sink Requirements
- Low Reverse Recovery Current
- Low Device Capacitance
- Low Reverse Leakage Current at Operating Temperature

Package

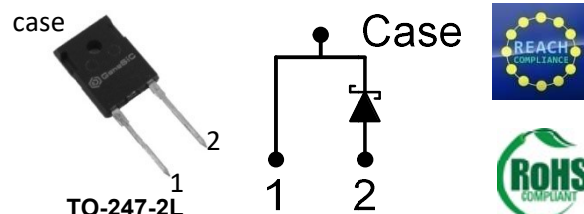

Applications

- Power Factor Correction (PFC)
- Switched-Mode Power Supply (SMPS)
- Solar Inverters
- Wind Turbine Inverters
- Motor Drives
- Induction Heating
- Uninterruptible Power Supply (UPS)
- High Voltage Multipliers

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Values	Unit
Repetitive Peak Reverse Voltage	V_{RRM}		1700	V
Continuous Forward Current	I_F	$T_C = 25^\circ\text{C}$, $D = 1$	31	A
		$T_C = 135^\circ\text{C}$, $D = 1$	16	
		$T_C = 170^\circ\text{C}$, $D = 1$	5	
Diode Ruggedness	dV/dt	$V_R = 0 \sim 960\text{ V}$	100	V/ μs
Power Dissipation	P_{tot}	$T_C = 25^\circ\text{C}$	319	W
Operating and Storage Temperature	T_j, T_{stg}		-55 to 175	$^\circ\text{C}$

Electrical Characteristics

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Diode Forward Voltage	V_F	$I_F = 5\text{ A}$, $T_j = 25^\circ\text{C}$		1.5	1.8	V
		$I_F = 5\text{ A}$, $T_j = 175^\circ\text{C}$		2.3	2.7	
Reverse Current	I_R	$V_R = 1700\text{ V}$, $T_j = 25^\circ\text{C}$		0.5	7	μA
		$V_R = 1700\text{ V}$, $T_j = 175^\circ\text{C}$		4	47	
Total Capacitive Charge	Q_C	$I_F \leq I_{F,MAX}$ $dI_F/dt = 200\text{ A}/\mu\text{s}$ $T_j = 175^\circ\text{C}$	$V_R = 400\text{ V}$	37		nC
			$V_R = 800\text{ V}$	55		
Switching Time	t_s		$V_R = 400\text{ V}$ $V_R = 800\text{ V}$	< 10		ns
Total Capacitance	C	$V_R = 1\text{ V}$, $f = 1\text{ MHz}$, $T_j = 25^\circ\text{C}$		598		pF
		$V_R = 800\text{ V}$, $f = 1\text{ MHz}$, $T_j = 25^\circ\text{C}$		40		

Thermal / Mechanical Characteristics

Thermal Resistance, Junction - Case	R_{thJC}	0.47	$^\circ\text{C}/\text{W}$
-------------------------------------	------------	------	---------------------------

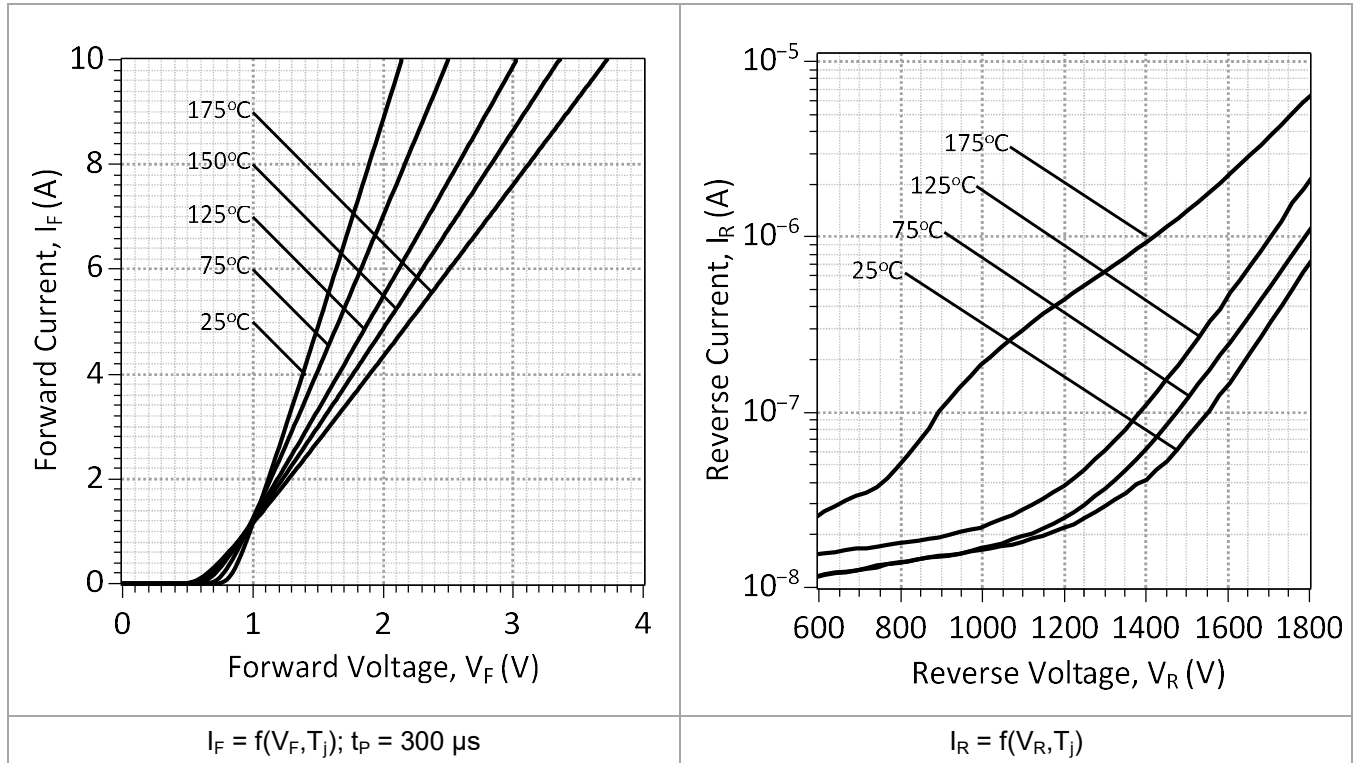


Figure 1: Typical Forward Characteristics

Figure 2: Typical Reverse Characteristics

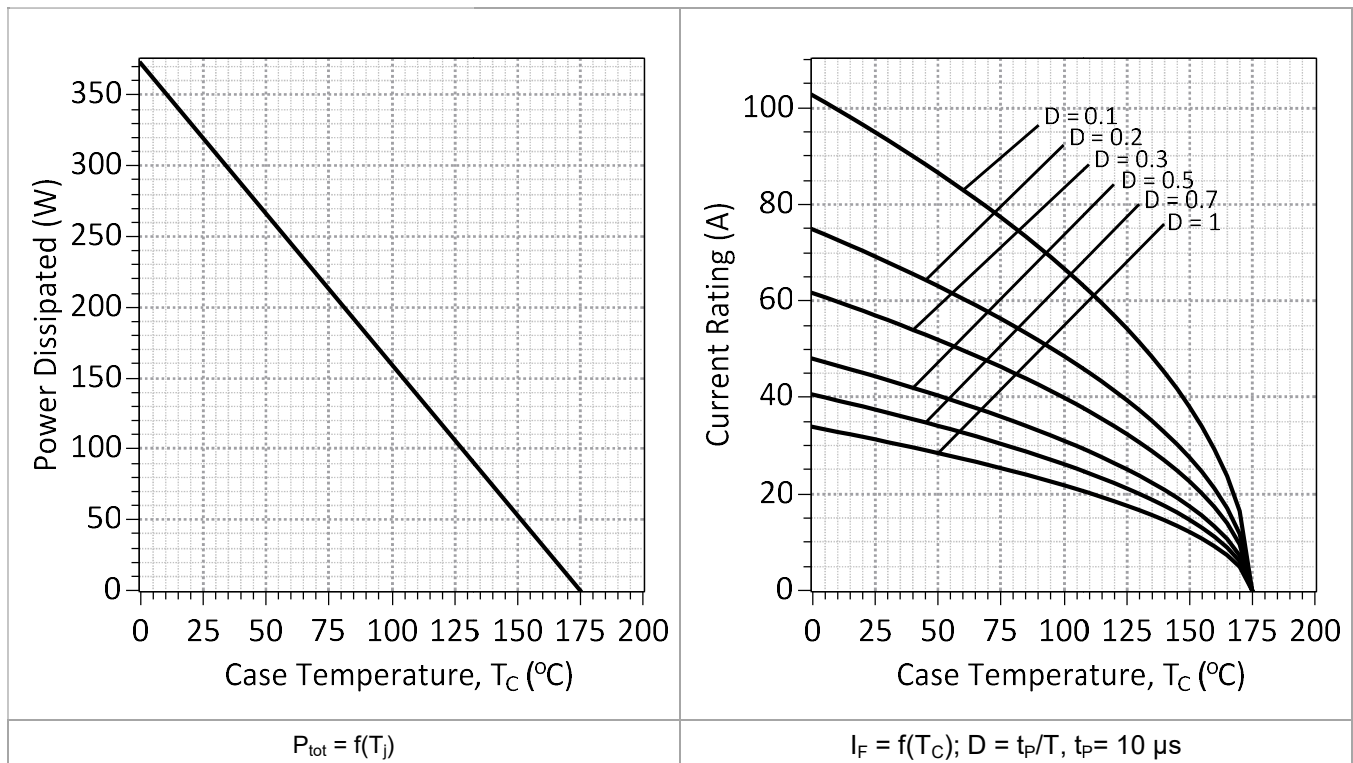


Figure 3: Power Derating Curve

Figure 4: Current Derating Curves

GB05MPS17-247

1700 V SiC MPS™ Diode

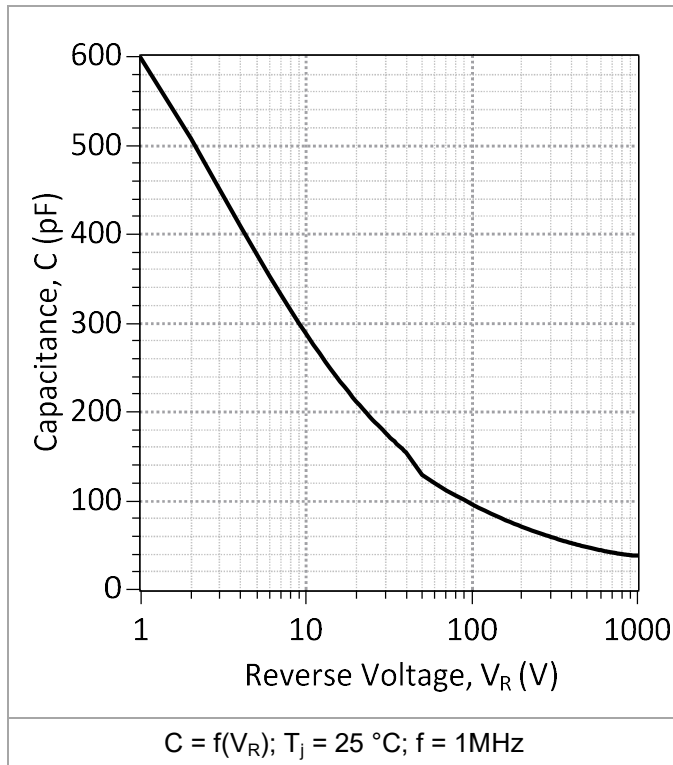


Figure 5: Typical Junction Capacitance vs Reverse Voltage Characteristics

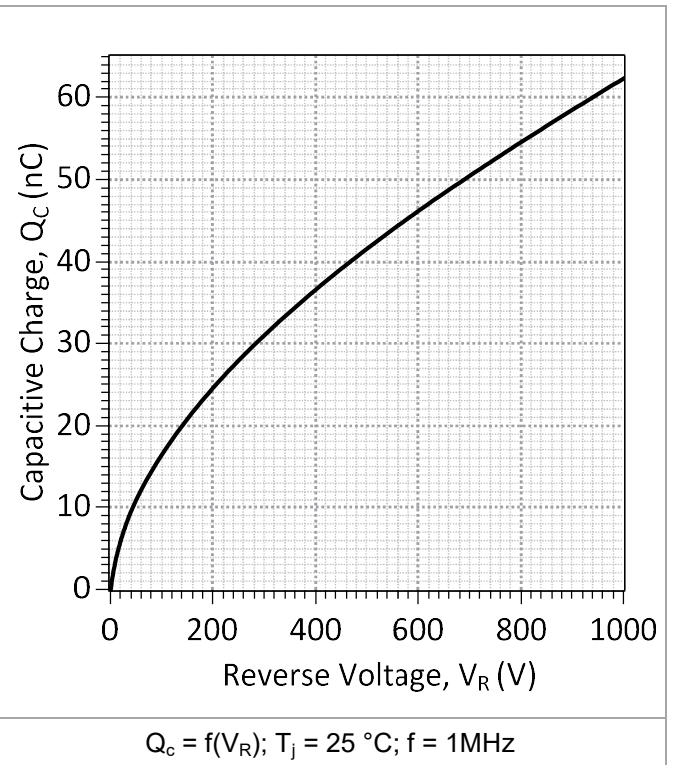


Figure 6: Typical Capacitive Charge vs. Reverse Voltage Characteristics

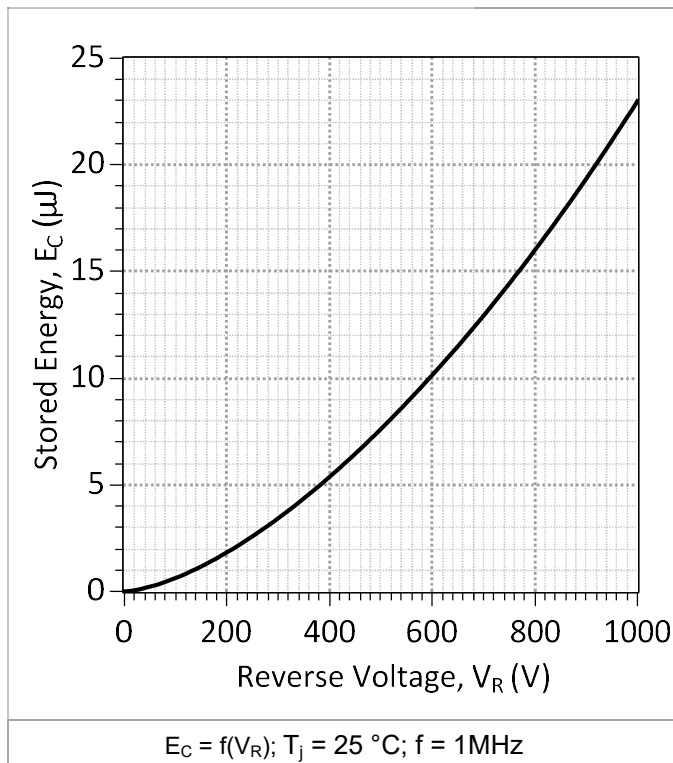


Figure 7: Typical Capacitive Energy vs. Reverse Voltage Characteristics

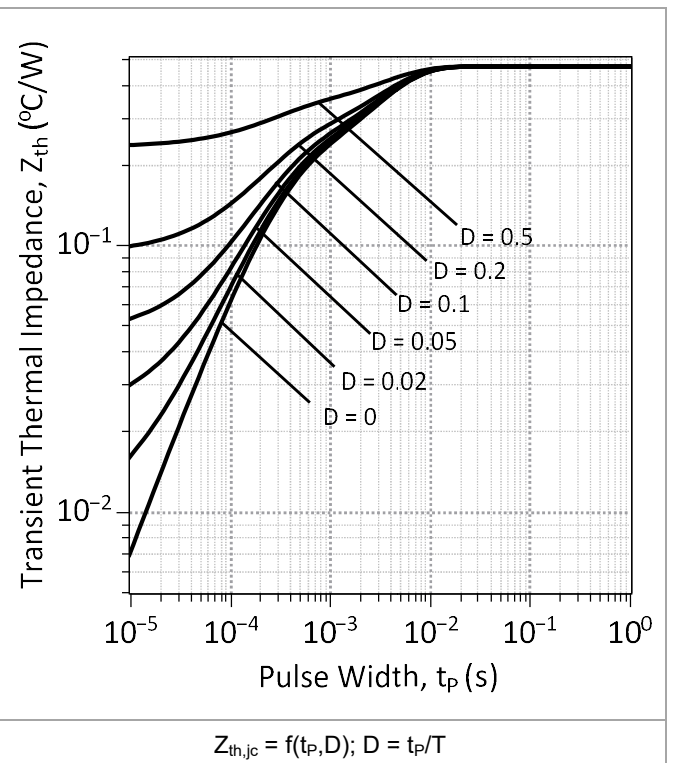


Figure 8: Transient Thermal Impedance

GB05MPS17-247

1700 V SiC MPS™ Diode

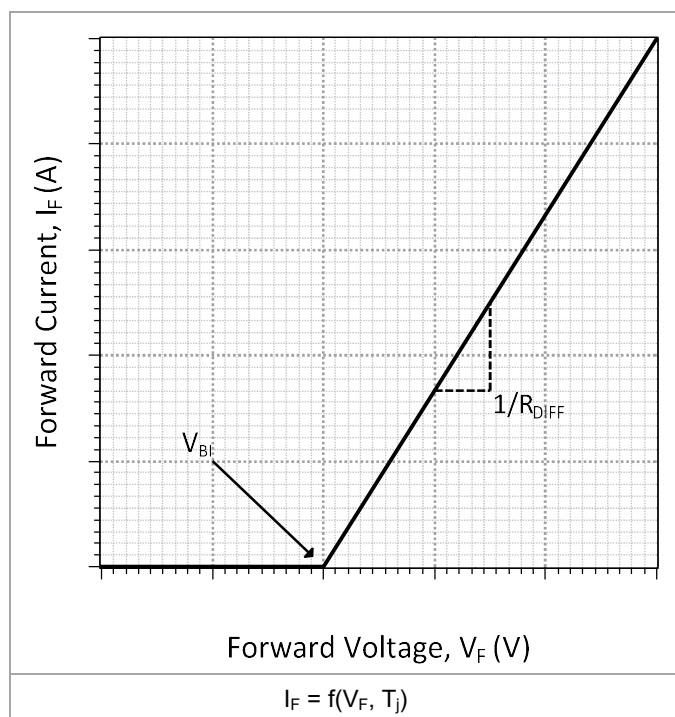


Figure 9: Forward Curve Model

$$I_F = (V_F - V_{BI})/R_{DIFF}$$

Built-In Voltage (V_{BI}):

$$V_{BI}(T_j) = m \cdot T_j + b,$$

$$m = -1.29e-03, b = 0.91$$

Differential Resistance (R_{DIFF}):

$$R_{DIFF}(T_j) = a \cdot T_j^2 + b \cdot T_j + c \text{ (}\Omega\text{)};$$

$$a = 1.21e-04, b = 1.75e-02, c = 3.98$$

GB05MPS17-247


1700 V SiC MPS™ Diode




Package Dimensions:

TO-247-2L

PACKAGE OUTLINE

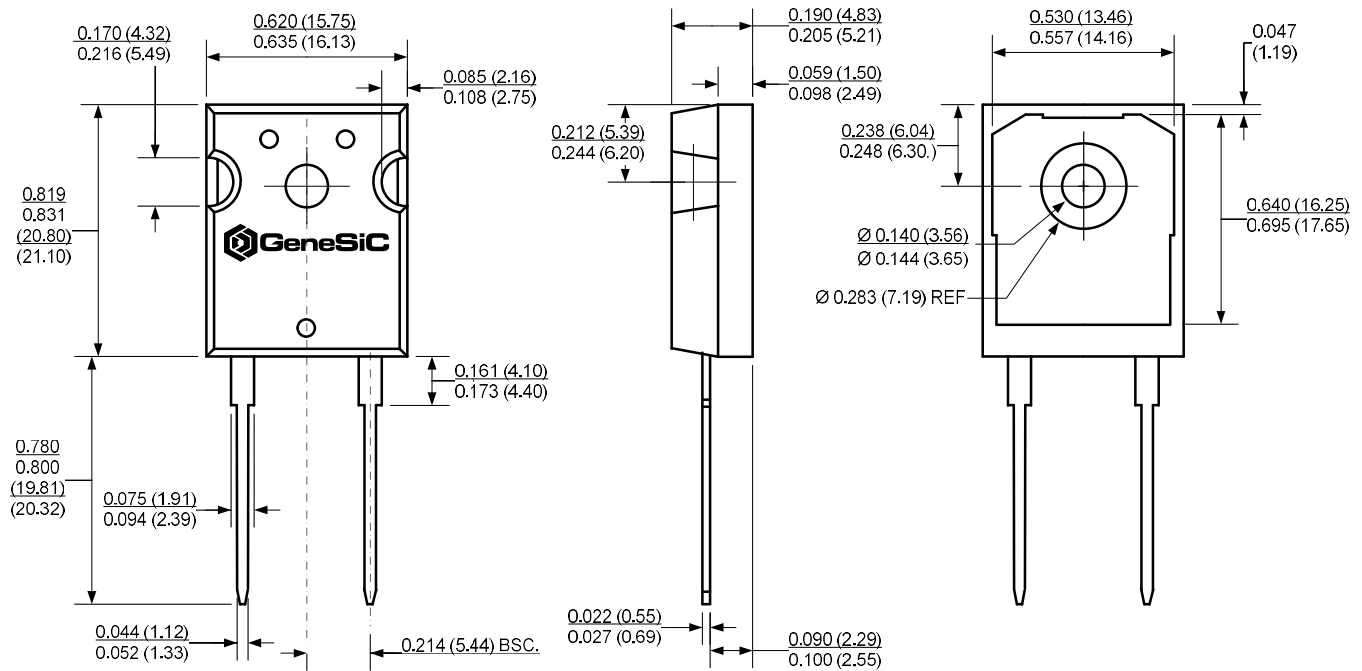

Recommended Solder Pad Layout

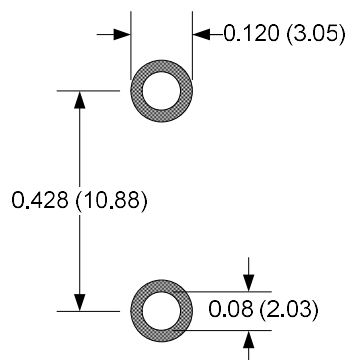

NOTE

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

GB05MPS17-247

1700 V SiC MPS™ Diode



RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your GeneSiC representative.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a GeneSiC representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control systems.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Related Links

- Soldering Document: <http://www.genesicsemi.com/quality/quality-manual/>
- Tin-whisker Report: <http://www.genesicsemi.com/quality/compliance/>
- Reliability Report: <http://www.genesicsemi.com/quality/reliability/>

GB05MPS17-247

1700 V SiC MPS™ Diode



SPICE Model Parameters

This is a secure document. Please copy this code from the SPICE model PDF file on our website (http://www.genesicsemi.com/sic_rectifiers_diodes/merged_pin_schottky/GB05MPS17-247_SPICE.pdf) into LTSPICE (version 4) software for simulation of the GB05MPS17-247.

```
*      GeneSiC Semiconductor SiC MPS™ Rectifier
*      Revision: 1.1
*      Date: February-2018
*****
**      TO-247-2 package
*****
.SUBCKT GB05MPS17 A K Case
L_anode      A      AD      6.5n
D1           AD      Case    GB05MPS17
L_cathode    K      Case    6.5n
.ends
*****
.SUBCKT GB05MPS17 ANODE KATHODE
D1 ANODE KATHODE GB05MPS17_SCHOTTKY
.MODEL GB05MPS17_SCHOTTKY D
+ IS      4.55E-15      RS      0.1242
+ N        1            IKF      500
+ EG       1.2          XTI      2
+ TRS1     0.005434     TRS2     2.717E-05
+ CJO      8.34E-10     VJ       0.879
+ M        0.438        FC       0.5
+ TT       1.00E-10     BV       1700
+ IBV      0.5E-06      VPK      1700
+ IAVE     5            TYPE     SiC_MPS™
+ MFG      GeneSiC_Semi
.ENDS
* End of GB05MPS17-247 SPICE Model
*****
* This model is provided "AS IS, WHERE IS, AND WITH NO WARRANTY OF ANY KIND
* EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED
* WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE."
```