

GETG0105

PHASE CONTROLLED SCR

Plastic case

DC power supply

AC drives

VOLTAGE UP TO	600 V
AVERAGE CURRENT	1050 A
SURGE CURRENT	15 kA

BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V _{RRM}	Repetitive peak reverse voltage	600 V
V _{RSM}	Non-repetitive peak reverse voltage	700 V
V _{DRM}	Repetitive peak off-state voltage	600 V
I _{DRM}	Repetitive peak off-state current, max.	V _{DRM} , single phase, half wave, T _j = T _{jmax} 50 mA
I _{RRM}	Repetitive peak reverse current, max.	V _{RRM} , single phase, half wave, T _j = T _{jmax} 50 mA

ON-STATE CHARACTERISTICS

I _{T(AV)}	Average on-state current	Sine wave, 180° conduction, Th = 55 °C	1050 A
I _{T(RMS)}	R.M.S. on-state current	Sine wave, 180° conduction, Th = 55 °C	1649 A
I _{TSM}	Surge on-state current	Non rep. half sine wave, 50 Hz, V _R = 0 V, T _j = T _{jmax}	15 kA
I ² t	I ² t for fusing coordination		1125 kA ² s
V _{T(TO)}	Threshold voltage	T _j = T _{jmax}	0.87 V
r _T	On-state slope resistance	T _j = T _{jmax}	0.238 mΩ
V _{TM}	Peak on-state voltage, max	On-state current I _T = 2900 A, T _j = T _{jmax}	1.56 V
I _H	Holding current, max	T _j = 25 °C	600 mA
I _L	Latching current, typ	T _j = 25 °C	1000 mA

TRIGGERING CHARACTERISTICS

V _{GT}	Gate trigger voltage	T _j = 25 °C, V _D = 5 V	2.5 V
I _{GT}	Gate trigger current	T _j = 25 °C, V _D = 5 V	190 mA
V _{GD}	Non-trigger voltage	V _D = 67% V _{RRM} , T _j = T _{jmax}	0.25 V
P _{GM}	Peak gate power dissipation	Pulse width 0.5 ms	10 W
P _{G(AV)}	Average gate power dissipation		2 W
I _{FGM}	Peak gate current		3 A
V _{FGM}	Peak gate voltage (forward)		20 V
V _{RGM}	Peak gate voltage (reverse)		5 V


SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	T _j = T _{jmax}	200 A/μs
dV/dt	Critical rate of rise of off-state voltage	T _j = T _{jmax}	500 V/μs
t _q	Turn-off time, typ	T _j = T _{jmax} , I _T = 320 A, di/dt = -12.5 A/μs V _R = 100 V, V _D = 67% V _{DRM} , dV/dt = 20 V/μs	μs


THERMAL AND MECHANICAL CHARACTERISTICS

R _{th(j-c)}	Thermal resistance (junction to case)	Double side cooled	0.034 °C/W
R _{th(c-h)}	Thermal resistance (case to heatsink)	Double side cooled	0.010 °C/W
T _{jmax}	Max operating junction temperature		125 °C
T _{stg}	Storage temperature		-30 / 125 °C
F	Clamping force ± 10%		9.0 kN
	Mass		85 g


Current rating - sine wave

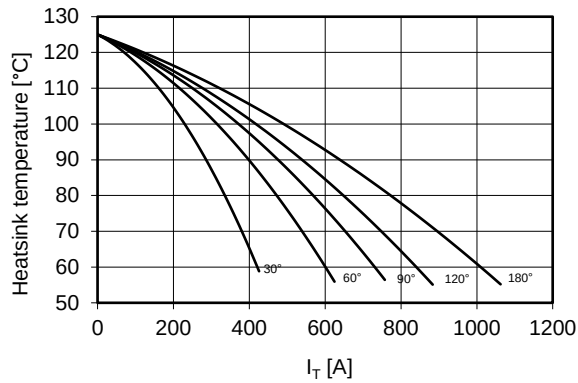


Power loss - sine wave

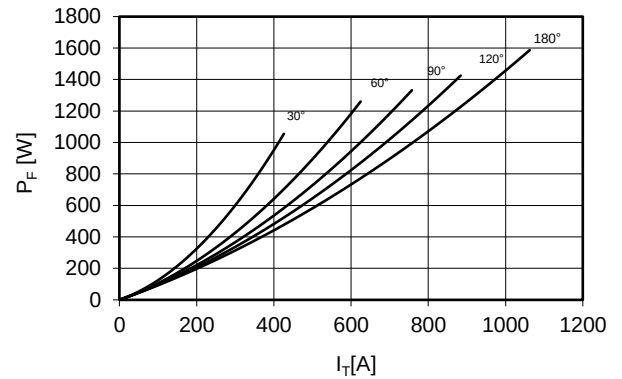



Maximum surge current
d.s. cooled

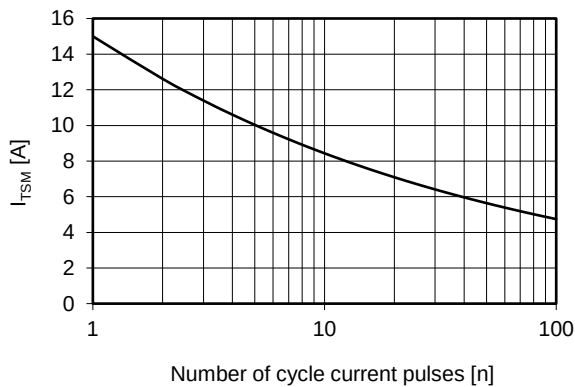

On-state voltage drop

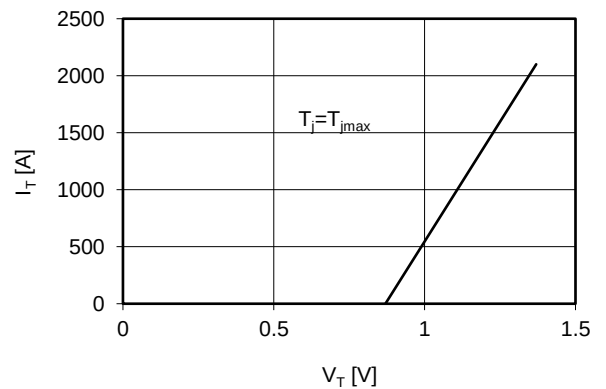

Thermal impedance (j-c)

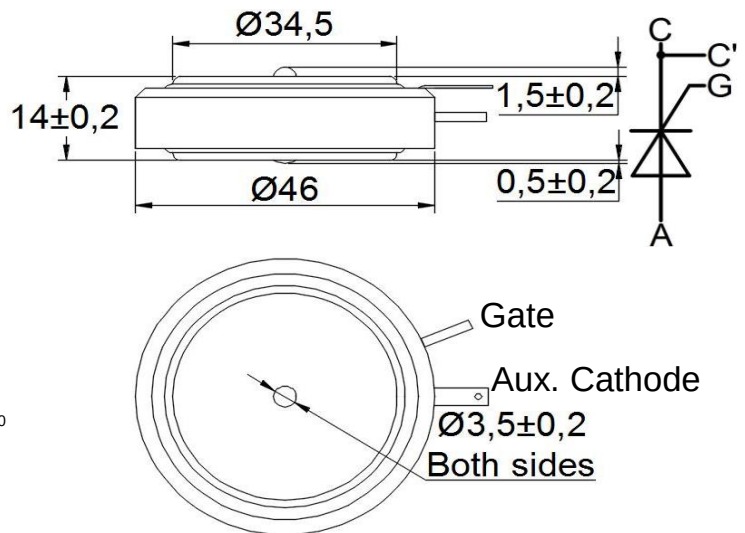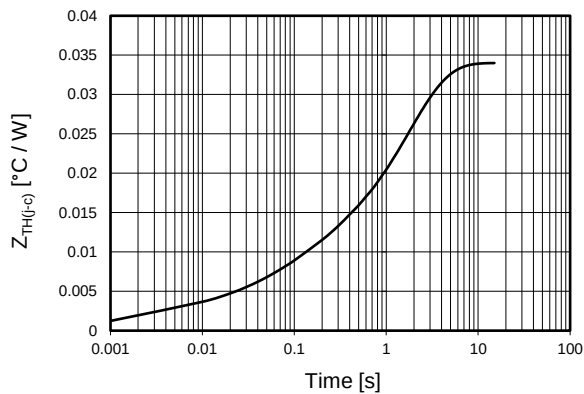

Ordering information GETG0105-VVGL

VV: blocking voltage / 100 (e.g. 06 for 600 V)

G: trigger lead type (**S** = straight **T** = twisted **blank** = no leads)

L: trigger lead length x 100mm (**3 - 4 - 5 - 7 blank** = no leads)

dimensions mm

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.