

GG-1141-15B

Operating voltage: 12 Vdc
Operating current: 15 amp.
Operating temperature: -40 c to 50 C
Internal battery charger: 13.8 V
High voltage cut-out level: 18.0 V
High voltage cut-out time: 5.0 ms
Low voltage battery cut-in level: 11.8 V
Low voltage battery cut-in time: 5.0 ms
Reverse polarity protected
Noise attenuation:
- 15 db at 10 Hz
- 35 db at 100 Hz
- 65 db (min) from 1000 hz to 1.0 Mhz

Order P/N: GG-1141-15B

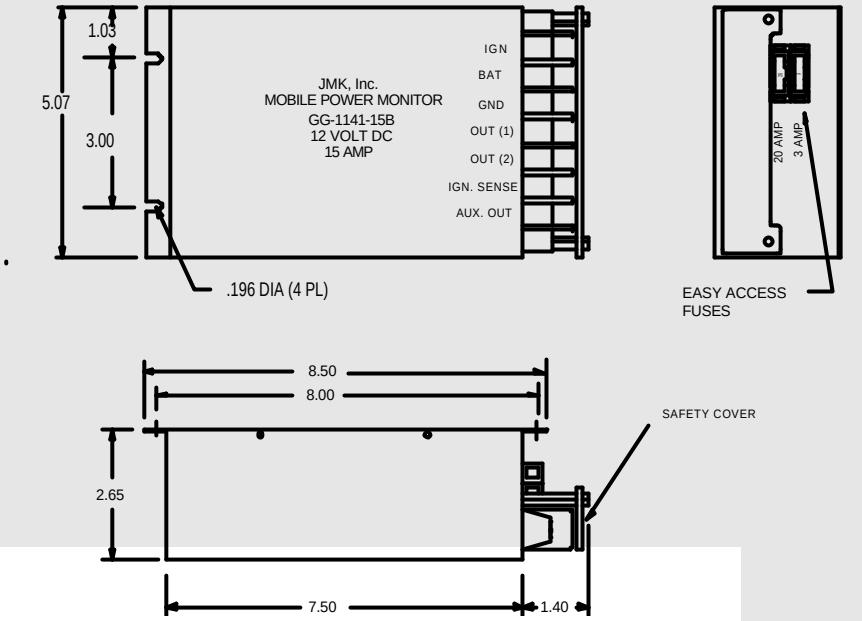

The JMK Mobile Power Conditioner is designed to protect sensitive electronic hardware installed on autos, buses, or trucks from damage or mal-function. Automotive electrical systems create a lot of internal electrical noise because of spark plugs, relays, electric motors, and other electronic hardware.

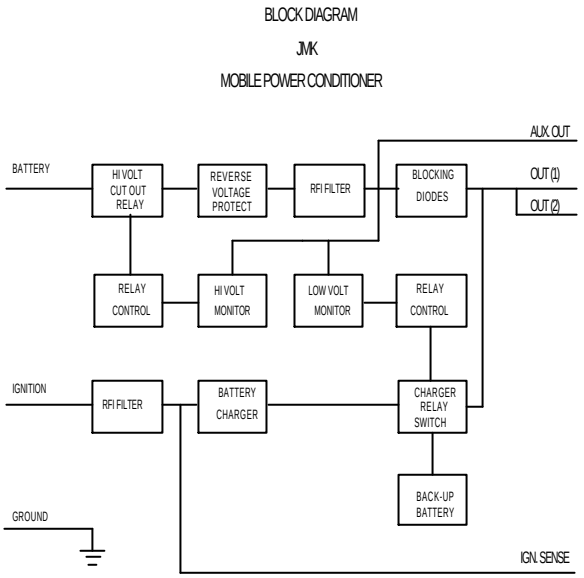



USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
email: info@jmkfilters.com
EUR JMK Inc Gloasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141 589 1884