

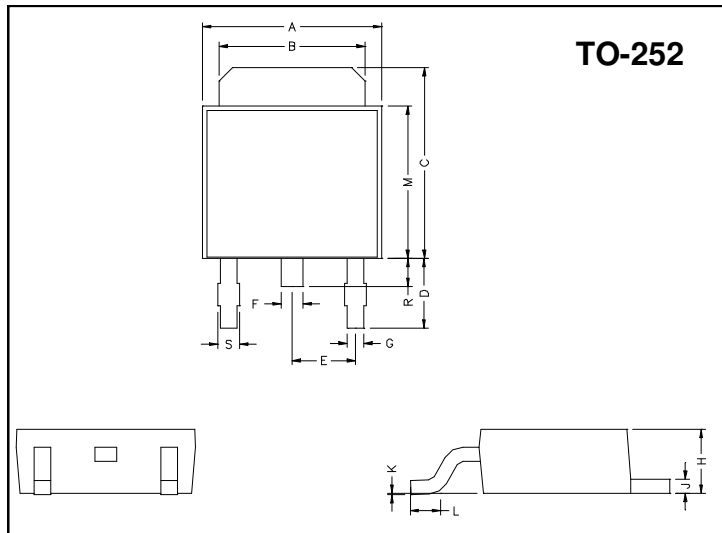


GJSBL1030CT~1060CT**SCHOTTKY BARRIER RECTIFIERS****REVERSE VOLTAGE 30V TO 60V, CURRENT 10A****Description**

The GJSBL1030CT~1060CT are designed for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

Features

- Guard ring for transient protection
- Low power loss, high efficiency
- High current capability, low V_F
- High surge capacity

Package Dimensions

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.40	6.80	G	0.50	0.70
B	5.20	5.50	H	2.20	2.40
C	6.80	7.20	J	0.45	0.55
D	2.40	3.00	K	0	0.15
E	2.30 REF.		L	0.90	1.50
F	0.70	0.90	M	5.40	5.80
S	0.60	0.90	R	0.80	1.20

Maximum Ratings and Electrical Characteristics at $T_a=25^\circ\text{C}$ unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

Parameters	Symbol	Ratings						Unit
		GJSBL 1030CT	GJSBL 1035CT	GJSBL 1040CT	GJSBL 1045CT	GJSBL 1050CT	GJSBL 1060CT	V
Max. Recurrent Peak Reverse Voltage	V _{RRM}	30	35	40	45	50	60	V
Max. RMS Voltage	V _{RMS}	21	24.5	28	31.5	35	42	V
Max. DC Blocking Voltage	V _{DC}	30	35	40	45	50	60	V
Max. Average Forward Rectified Current (See Fig.1) @T _C =95°C	I _(AV)	10						A
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rated load (JEDEC METHOD)	I _{FSM}	125						A
Max. Forward Voltage @ 5A (Note 1)	V _F	0.55				0.7		V
Max. DC Reverse Current At Rated DC Blocking Voltage @T _J =25°C @T _J =100°C	I _R	0.5 50						mA
Typical Thermal Resistance @T _C =25°C (Note2)	R _{θJC}	10						°C/W
Operating Temperature Range	T _j	-55 ~ +125						°C
Storage Temperature Range	T _{stg}	-55 ~ +150						°C

Notes: 1. 300us Pulse Width, 2% Duty Cycle.

2. Thermal Resistance Junction to Case.

Characteristics Curve

Fig. 1 Forward Current Derating Curve

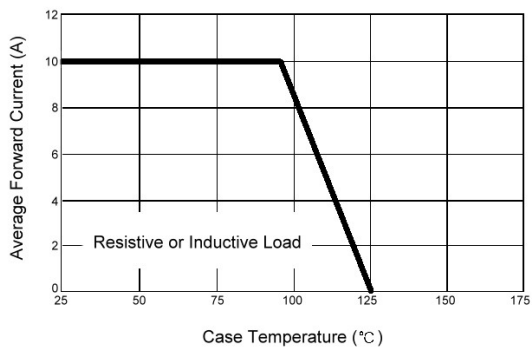


Fig. 2 Maximum Non-Repetitive Surge Current

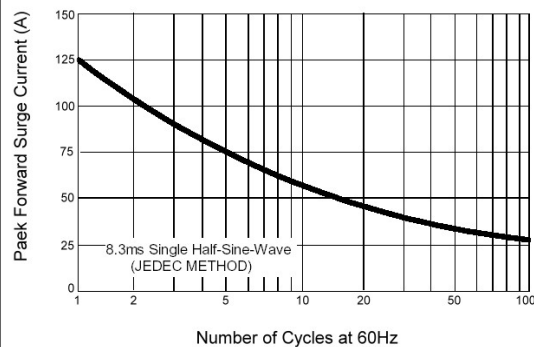


Fig. 3 Typical Reverse Characteristics

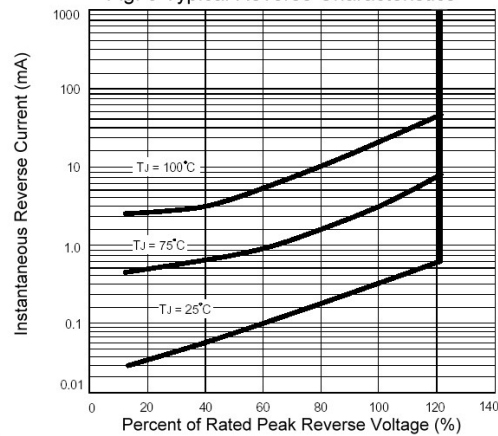


Fig. 4 Typical Forward Characteristics


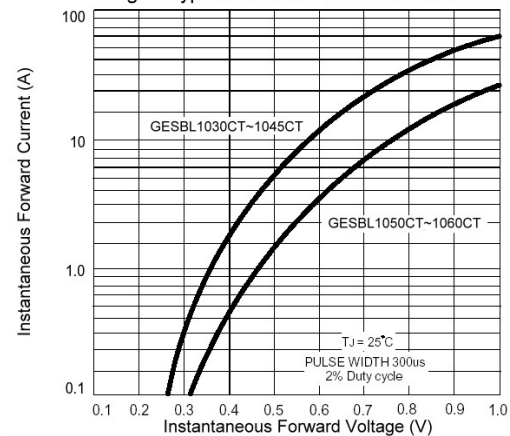


Fig. 5 Typical Junction Capacitance

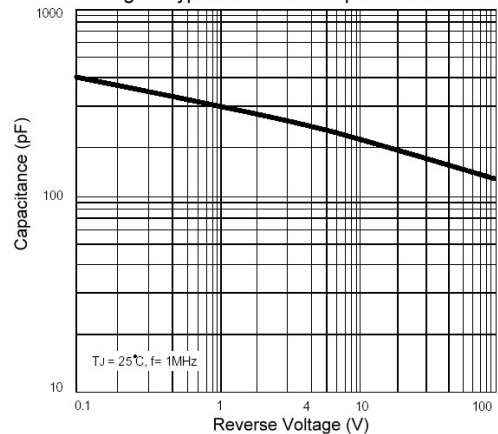

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165