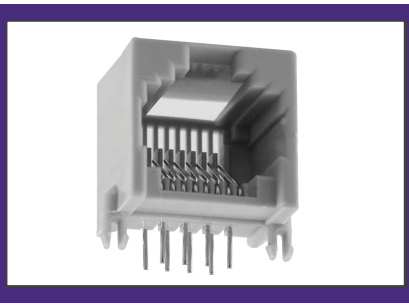


2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

GLX-N-44M

Part Number Builder

GLX	–	N	44	M	
Series		Shield Option	Positions & Contacts	Body Options	Other Option

MODULAR JACKS AND PLUGS: GLX Series

Right Angle Modular Jack

Product Features

0.570" Height
Snap-In Board Retention Tabs
Available in 4, 6, 8 and 10 Position Housings
CSA/NRTL Certified File No. LR78160
UL File No. E134345

Performance Specifications

Materials and Finish
Housing Material
PBT Thermoplastic, UL 94V-0 Rated
Contact Material
Phosphor Bronze

Electrical Characteristics

Insulation Resistance
500 Megohms Min.
Dielectric Withstanding Voltage
1000V RMS, 60Hz
Contact Resistance
20 milliohms Max.
Current Rating
1.5A
Voltage Rating
125V DC

Series
GLX - Right Angle Modular Jack

Shield Options
N - Non-Shielded without Panel Stops
S - Shielded without Panel Stops (8 Position only)
S1 - Shielded with Top Panel Stops (Available with 6 and 8 Positions)

Number of Positions / Contacts
44 - 4 Positions / 4 Contacts (Only N Option)
62 - 6 Positions / 2 Contacts
64 - 6 Positions / 4 Contacts
66 - 6 Positions / 6 Contacts
88 - 8 Positions / 8 Contacts
1010 - 10 Positions / 10 Contacts

Body Option
M - Short Body

Other Option
Plating Option
Blank - Gold Flash
50 - 50µ" Gold Plating

Color Option
Blank - Gray
BLK - Black

Contact Kycon for Other Options

GLX Series
Dimensions in mm

GLX-N-44M

