

High Voltage 1.0A Sintered Glass Passivated Rectifie

GP02-12A THRU GP02-20A

VOLTAGE RANGE
CURRENT


1200 to 2000 Volts
1.0 Ampere

FEATURES

- GPRC (Glass Passivated Rectifier Chip) inside
- Glass passivated cavity - free junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.0A operation at TA=75°C and 55°C with no thermal runaway
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature soldering guaranteed:
260°C/10 seconds,0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension
- RoHS Compliance

MECHANICAL DATA

- Case : JEDEC DO-41 molded plastic over glass body
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Weight :0.012 ounce, 0.33 grams(DO-41)

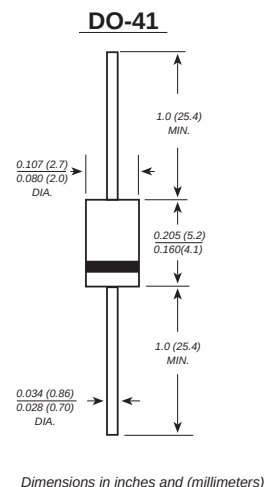

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	GP02-12A	GP02-15A	GP02-18A	GP02-20A	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	1200	1500	1800	2000	VOLTS
Maximum RMS voltage	V_{RMS}	840	1050	1260	1400	VOLTS
Maximum DC blocking voltage	V_{DC}	1200	1500	1800	2000	VOLTS
Maximum average forward rectified current 0.375"(9.5mm) lead length (see fig.1)	$I_{(AV)}$	1.0				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0				Amps
Maximum instantaneous forward voltage at 1.0 A	V_F	2.0				Volts
Maximum DC reverse current $T_A=25^{\circ}C$ at rated DC blocking voltage $T_A=100^{\circ}C$	I_R	5.0 50.0				μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	2.0				μS
Typical junction capacitance (NOTE 2)	C_J	3.0				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	130.0				$^{\circ}C/W$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175				$^{\circ}C$

Note:1.Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$
2.Measured at 1MHz and applied reverse voltage of 4.0V.
3.Thermal resistance from junction to ambient at 0.375"(9.5mm)lead length,P.C.B. mounted

High Voltage 1.0A Sintered Glass Passivated Rectifier

GP02-12A THRU GP02-20A

VOLTAGE RANGE 1200 to 2000 Volts
CURRENT 1.0 Ampere

TYPICAL CHARACTERISTIC CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

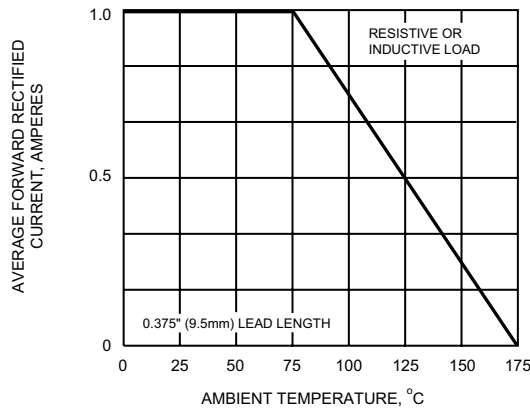


FIG.2 - MAXIMUM NON-REPETITIVE
PEAK FORWARD SURGE CURRENT

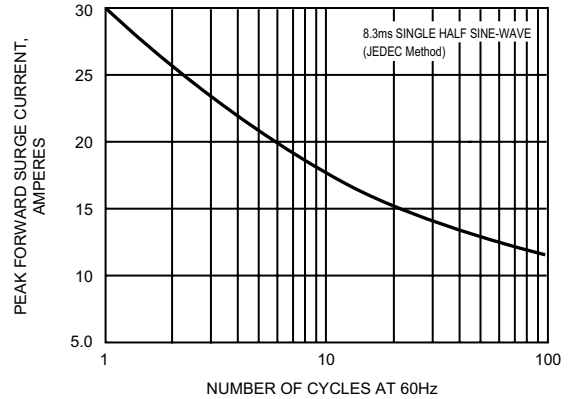


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS

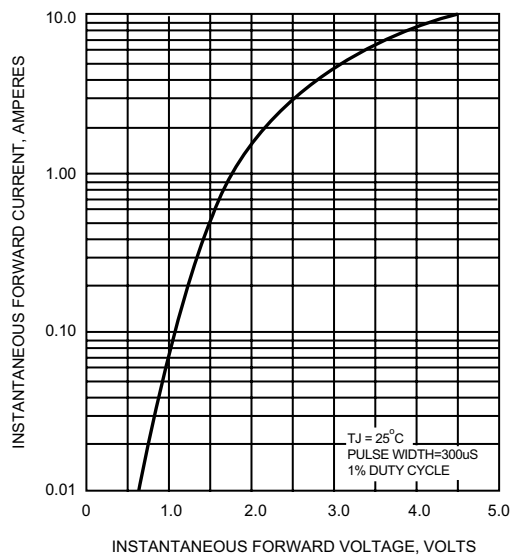


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

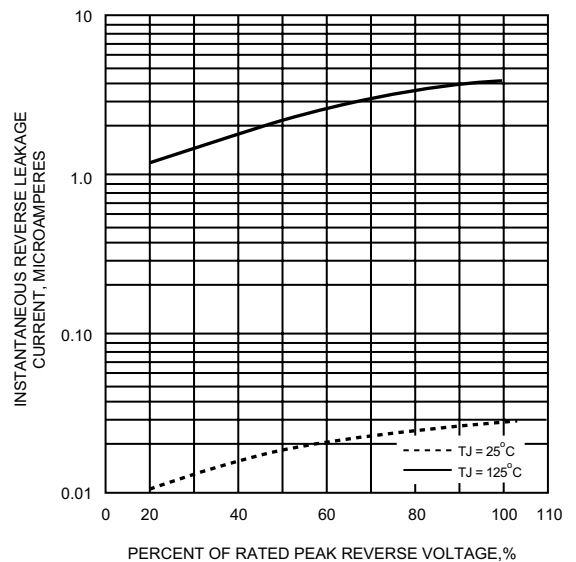


FIG.5 - TYPICAL JUNCTION CAPACITANCE

