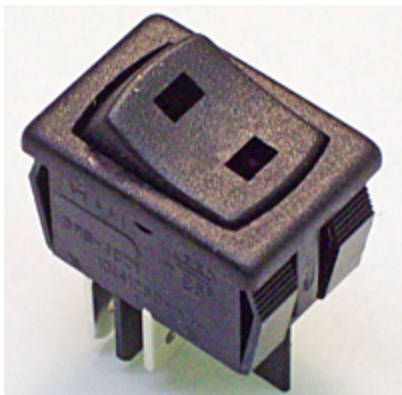


CW INDUSTRIES

130 James Way

Southampton, PA 18966

Phone: 215-355-7080 • Fax: 215-355-1088

Email: info@cwind.com • Website: <http://www.cwind.com>**Item # GRSV-4021-0005, 4000 Series Maintained Action Miniature Rocker Switches**
[Check Distributor Stock](#) · [Specifications](#) · [Materials](#) · [Operating Standards](#)
Check Distributor Stock

Check Distributor Stock	PEERLESS ELECTRONICS
-------------------------	--------------------------------------

Specifications

Circuitry	DPST		
Switch Function	ON-OFF		
Electrical Ratings¹	10 (4) 250~μ T 85° 10 A @ 14 V T 16 A @ 125-250 VAC 3 A @ 125 V L 3/4 HP @ 125-250 VAC		
Temperature Rating	+105 Max. Degrees C		
Panel Opening	0.508 x 0.756 in 12.90 x 19.20 mm		
Acceptable Panel Thickness	0.050 - 0.150 in 1.27 - 3.81 mm		
Mounting	Self locks without hardware when inserted into a 0.756" (19.20 mm) x 0.508" (12.90 mm) panel cutout. Acceptable panel thickness range is from 0.050" (1.27 mm) to 0.150" (3.81 mm). CAUTION: Burr direction must be away from the direction of insertion.		
Mounting Polarization	None		
Actuator Color	Black		
Actuator Legend	None		
Illumination	Non Illuminated		
Housing Color	Black		
Insulating Barriers	(X) Between Poles (X) Between Terminals (_) No Barriers		
Terminal	(X) 0.187 x 0.032in. 4.75 x 0.81mm. Quick Connect (_) 0.187 x 0.020in. 4.75 x 0.51mm. Quick Connect (_) 0.110 x 0.032in. 2.79 x 0.81mm. Quick Connect (_) 0.110 x 0.032in. 2.79 x 0.81mm. Solder Terminal		
Contact Action	Sliding with Self Cleaning Contacts		

Listing Agency
(Consult drawing or factory for specific rating)²



Listed Agencies

Compliance



¹ All ratings are on a load per pole, opposite polarity basis. Additional ratings may be available, contact us for more information.

Switches marked μ are acceptable for use as power switches provided there is a plug disconnect or a switch with open contact gaps of 3 mm minimum.

² Due to ongoing advancements, additional agency certifications may be available, contact us for more information.

Materials

Rocker Knob	Nylon 94V-2
Housing	Nylon 94V-2
Terminal & Moving Contact	Copper Alloy or Copper Alloy Silver Plated

Operating Standards

Endurance:

100,000 cycles, no load, minimum

25,000 cycles at rated load minimum up to 16 A @ 125 VAC

10,000 cycles at rated load minimum 16 A @ 250 VAC

Contact Resistance:

Less than 0.01 Ω at 10 mA (Initial)

Operating Temperature:

From -20°C to 105°C maximum.

Consult factory for higher or lower temperature ranges.

High Voltage Dielectric Withstanding Voltage:

2,500 V, 60 Hz for 1 minute between mounting surface and circuit connections

Humidity:

Insulation resistance > 10³ M Ω after 100 hours at 95% R.H. and 50°C followed by 1 hour dry at ambient room conditions

Operating Standards described herein are general specifications that vary depending on the switch construction specified and end application. Contact us for specifications for specific models. Specifications subject to change without notice.