
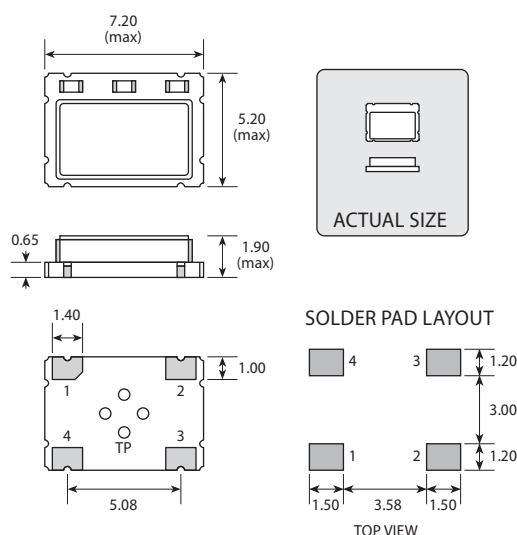


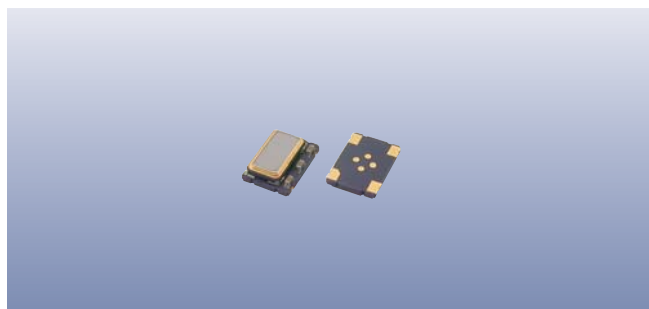

PAD	CONNECTION
1	Ground or Freq adjustment
2	Ground
3	Output
4	Supply

Features

- Supply voltages from 2.7V ~ 5.5V
- Low power consumption
- 1.9mm maximum height
- Excellent frequency stability

Standard Frequencies

Frequencies in MHz		
10.00000	15.36000	19.68000
12.80000	16.00000	19.80000
13.00000	19.20000	26.00000
14.40000	19.44000	

Specifications

GTXO-71T: TCXO, no frequency adjustment

GTXO-71V: TCXO with VC frequency adjustment


Parameters	Variant		Option Codes
	T	V	
Frequency range: 10.0 ~ 26.0MHz	■	■	
Frequency stability: ±3.0ppm	□	□	K
±2.5ppm	■	■	J
±2.0ppm	□	□	H
±1.5ppm	□	□	G
±1.0ppm	□	□	F
Temperature range: 0 to +50°C	□	□	R
-10 to +60°C	□	□	C
-20 to +70°C	□	□	N
-30 to +75°C	■	■	S
Storage temperature range: -40 to +85°C	■	■	
Frequency vs supply voltage: ±0.3ppm, V _{DD} ±5%	■	■	
Ageing: ±1.0ppm max first year	■	■	
Supply voltage (V _{DD}): +2.7V ~ +5.5V (see note 1)	■	■	
Supply current: 2.0mA max	■	■	
Output waveform: Clipped sine, 0.8V p-p (see note 2)	■	■	
Test load: 10kΩ // 10pF	■	■	
Start up time: 3ms max	■	■	
Frequency adjustment: None ±8ppm min, +1.5V ±1.0V	■	■	
Phase noise: -50dBc/Hz typ @ 1Hz	■	■	
-80dBc/Hz typ @ 10Hz	■	■	
-125dBc/Hz typ @ 1kHz	■	■	
-140dBc/Hz typ @ 100kHz	■	■	
Stability 24hrs after reflow: ±1.0ppm max	■	■	
Preset frequency: ±0.5ppm / +25°C ±2°C	■	■	

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + variant + option codes + frequency
 Option codes must be included to properly specify a model.
 eg: GTXO-71V/JS 13.00MHz ±2.5ppm -30 to +75°C TCXO with VC
 GTXO-71T/HN 14.40MHz ±2.0ppm -20 to +70°C TCXO no VC
 Option code X (eg GTXO-71V/X) denotes a custom spec.

- 1: Will operate within specification on any supply voltage from +2.7V to +5.5V.
- 2: The output is not DC-free. A coupling capacitor (10nF) may be required.

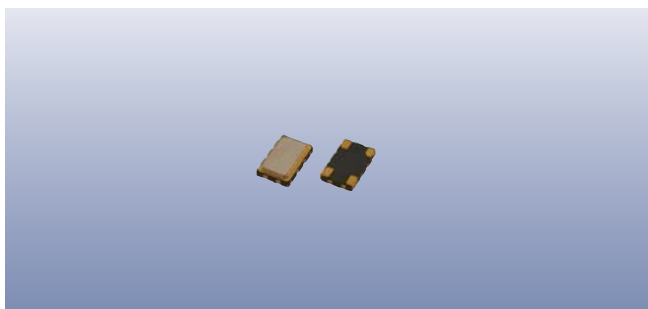

Packaging & Handling

Production quantities supplied on T & R, 1k pcs per reel.
Small quantities may be supplied on tape (no reel), or in bulk.




♦ Static sensitive product. Observe proper handling precautions

Marking

- S71 DC
- FREQUENCY
- Pin 1
- Marking type: Laser
- DC = Date code in YM, eg "CE" = May 2003

	A	B	C	D	E	F	G	H	J	K	L	M
Y	1	2	3	4	5	6	7	8	9	0		
M	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Tape & Reel Specification

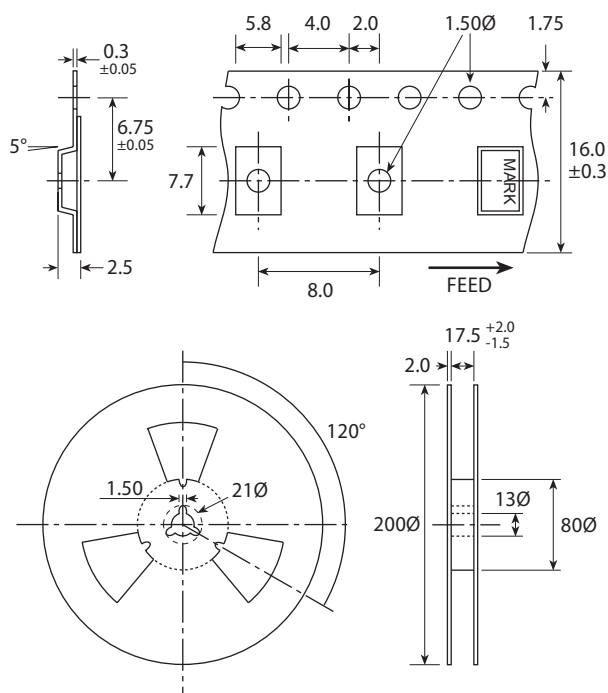

Not to scale. Dimensions in mm. Tolerances ± 0.1 mm unless otherwise stated

Construction


- Ceramic body with gold-plated pads
- Metal lid, seam sealed

Composition



This product is lead-free
WARNING: It is not designed to withstand 260°C processing

Soldering Profile

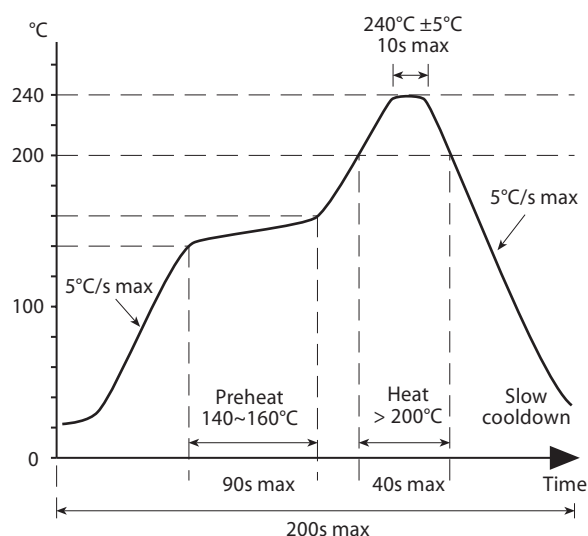

Solder resistance: 240°C x 10 secs x 2.

♦ This product is not designed to withstand 260°C processing