HIGH DIODE


HD2300

SOT-23 Plastic-Encapsulate MOSFET

N-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
20V	28mΩ@4.5V	5.1A
	38mΩ@2.5V	
	60mΩ@1.8V	

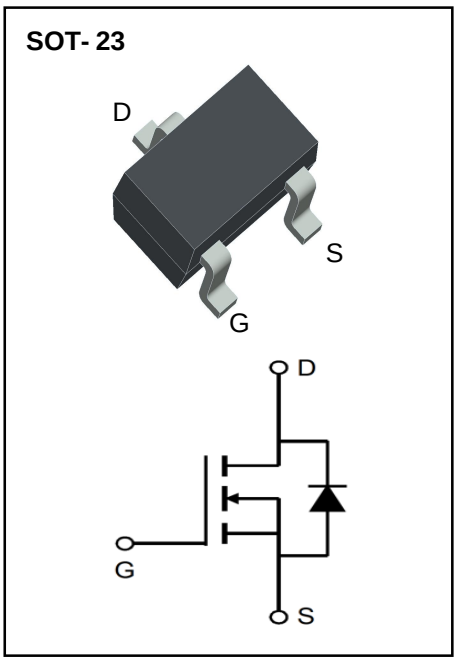

Features

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$ and Low Gate Charge

Applications

- Extreme fast switches

Marking:

- S0

Limiting Values (Absolute Maximum Rating)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	±12	V
Continuous Drain Current	I_D	5.1	A
Pulsed Drain Current(1)	I_{DM}	20	A
Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient(2)	$R_{\theta JA}$	357	℃/W
Junction Temperature	T_J	150	℃
Storage Temperature	T_{STG}	-55~ +150	℃

Downloaded from alldatasheet.com

Electrical Characteristics (T_A=25℃ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
STATIC CHARACTERISTICS						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D =250μA	20			V
Zero gate voltage drain current	I_{DSS}	V_{DS} =20V,V_{GS} = 0V			1	μA
Gate-body leakage current	I_{GSS}	V_{GS} =±12V, V_{DS} = 0V			±100	nA
Gate threshold voltage(3)	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =250μA	0.6	0.84	1	V
Drain-source on-resistance(3)	$R_{DS(on)}$	V_{GS} =4.5V, I_D =3A		22	28	mΩ
		V_{GS} =2.5V, I_D =2A		30	38	
		V_{GS} =1.8V, I_D =2A		53	60	
Forward tranconductance(3)	g_{FS}	V_{DS} =10V, I_D =6A		5		S
DYNAMIC CHARACTERISTICS(4)						
Input Capacitance	C_{iss}	V_{DS} =8V,V_{GS} =0V,f=1MHz		523		pF
Output Capacitance	C_{oss}			99		
Reverse Transfer Capacitance	C_{rss}			75		
SWITCHING CHARACTERISTICS(4)						
Turn-on delay time	$t_{d(on)}$	V_{GS}=4.5V,V_{DS}=10V, I_D=1A,R_{GEN}=6Ω		10.5	21	ns
Turn-on rise time	t_r			4.5	9	
Turn-off delay time	$t_{d(off)}$			27.5	55	
Turn-off fall time	t_f			4.3	8.6	
Total gate charge	Q_g	V_{DS} =10V,V_{GS} =4.5V,I_D =6A		6.4	8.2	nC
Gate-source charge	Q_{gs}			1.8	2.3	
Gate-drain charge	Q_{gd}			1.3	1.9	
SOURCE-DRAIN DIODE CHARACTERISTICS						
Body Diode Voltage(3)	V_{SD}	I_S=1.7A, V_{GS} = 0V		0.8	1.2	V
Continuous Source-Drain Diode Current	I_S	T_C=25℃			1.7	A

Notes:

1. Repetitive rating : Pulse width limited by junction temperature.
2. Surface mounted on FR4 board , t≤10s.
3. Pulse Test : Pulse Width≤80μs, Duty Cycle≤0.5%.
4. Guaranteed by design, not subject to producting.

Downloaded from alldatasheet.com

Typical Characteristics

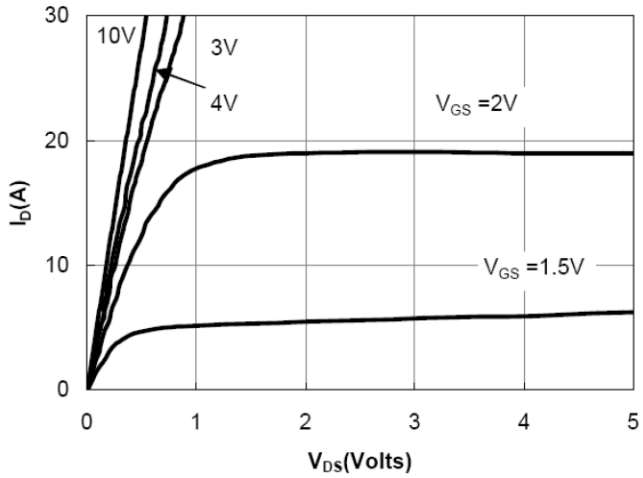


Figure 1: On-Regions Characteristics

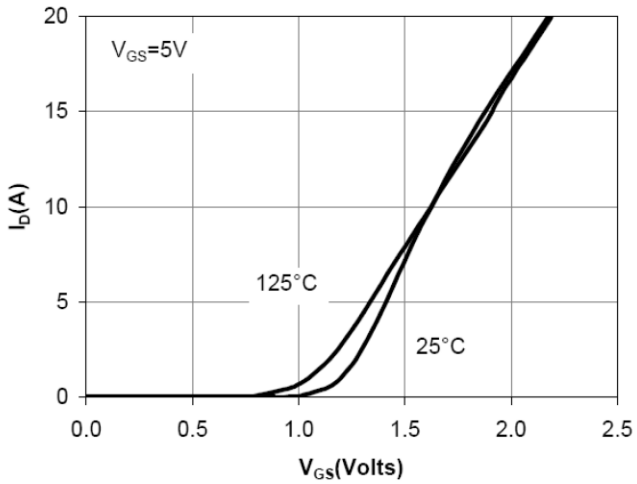


Figure 2: Transfer Characteristics

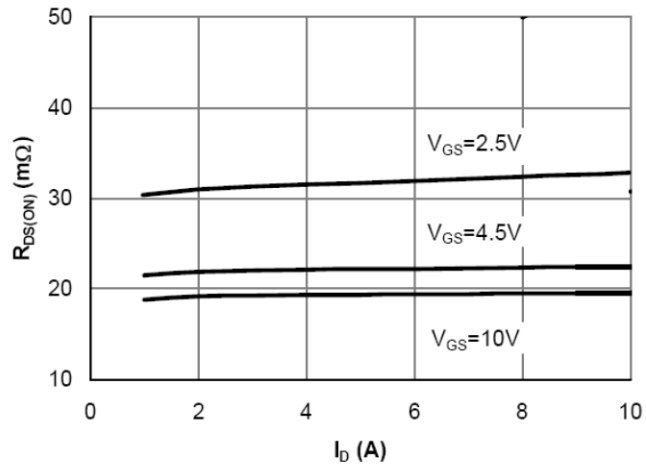


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

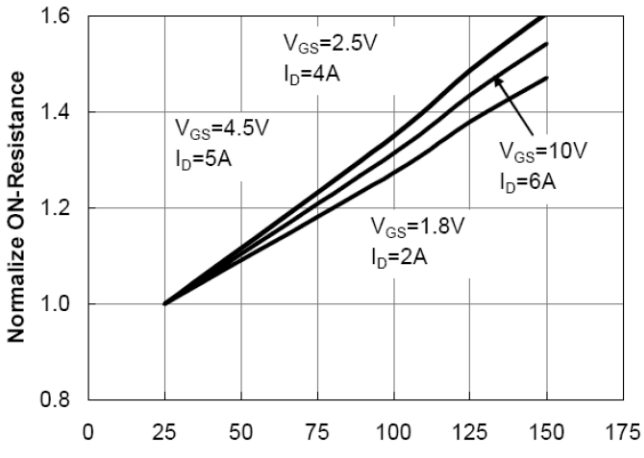


Figure 4: On-Resistance vs. Junction Temperature

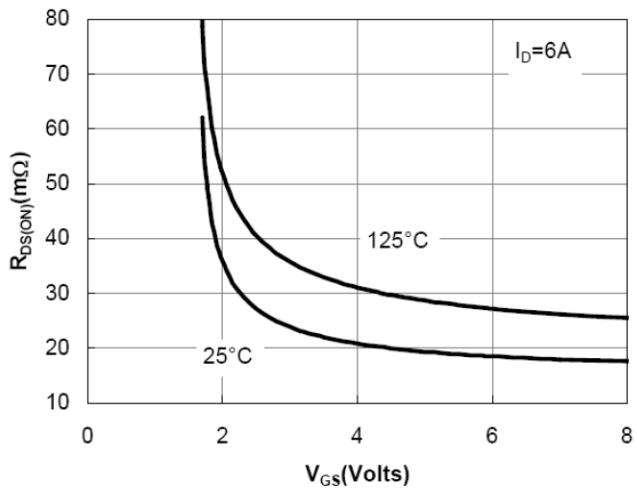


Figure 5: On-Resistance vs. Gate-Source Voltage

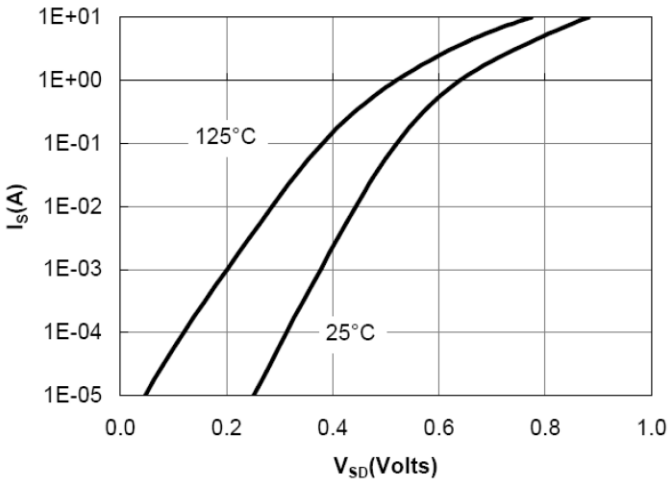


Figure 6: Body-Diode Characteristics

Downloaded from alldatasheet.com

Typical Characteristics

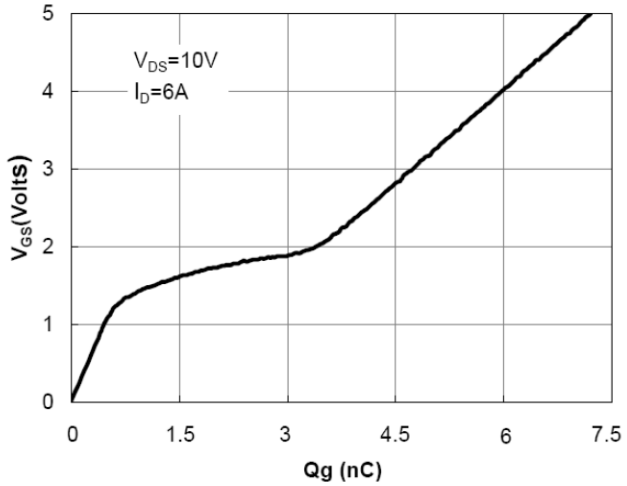


Figure 7: Gate-Charge Characteristics

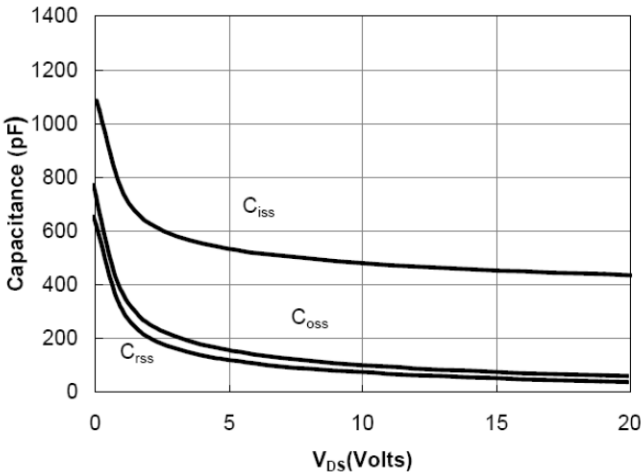


Figure 8: Capacitance Characteristics

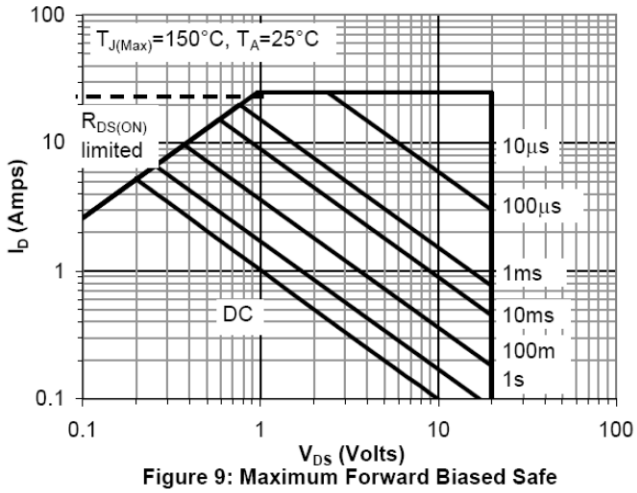


Figure 9: Maximum Forward Biased Safe Operating Area

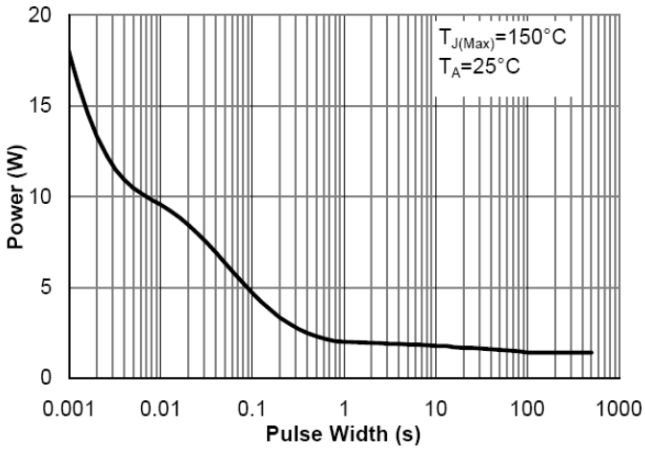


Figure 10: Single Pulse Power Rating Junction-to-Ambient


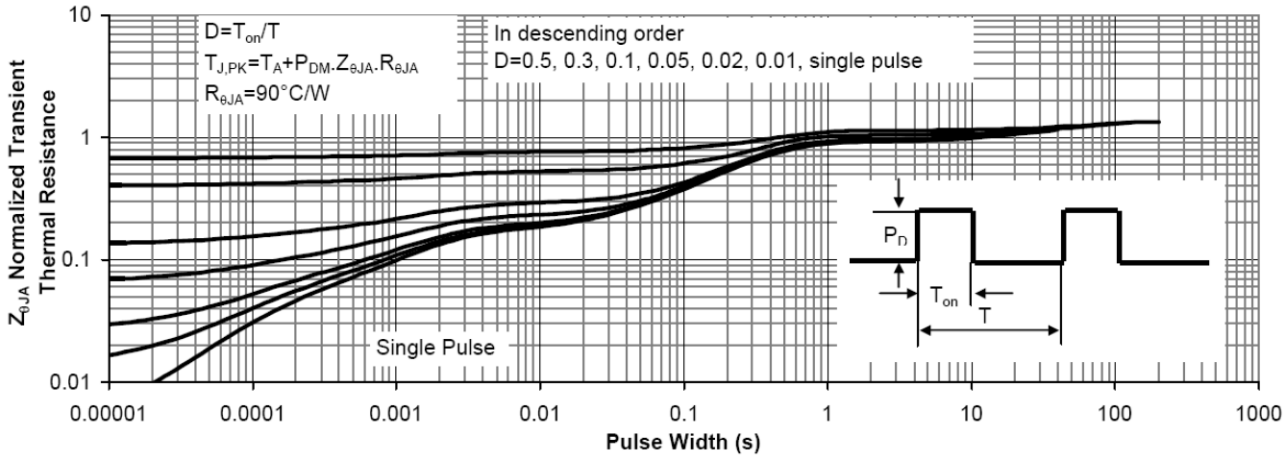


Figure 11: Normalized Maximum Transient Thermal Impedance


Downloaded from alldatasheet.com

SOT-23 Package Outline Dimensions

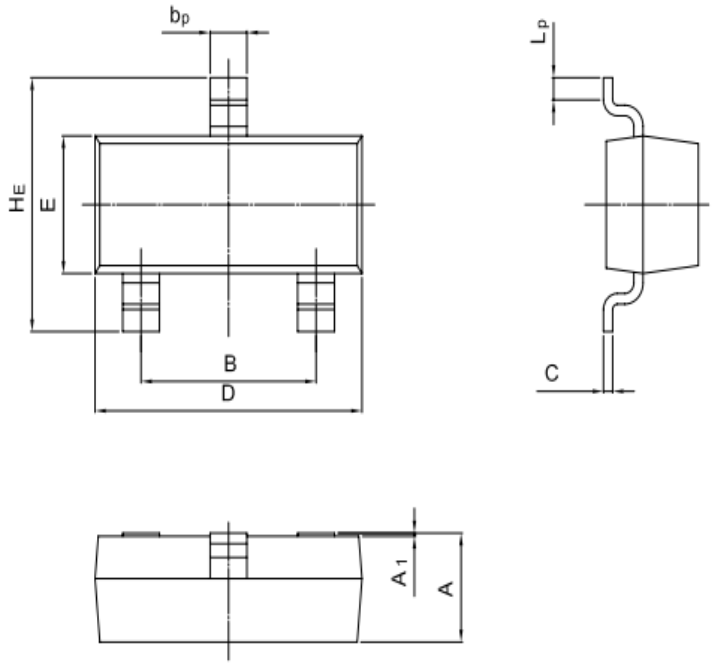

UNIT	A	B	bp	C	D	E	HE	A1	Lp
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

SOT-23 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.


NOTICE

JSHD reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein .JSHD does not assume any liability arising out of the application or use of any product described herein.

Downloaded from alldatasheet.com

Reel Taping Specifications For Surface Mount Devices–SOT–23

SOT-23 Embossed Carrier Tape

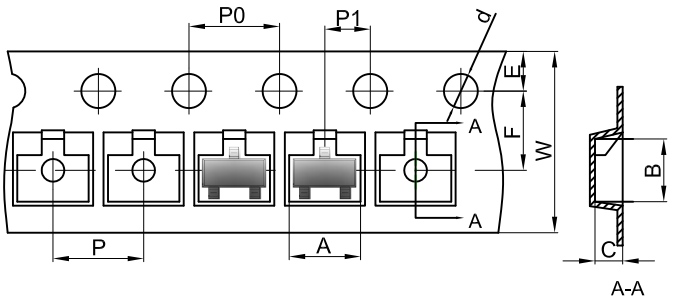


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

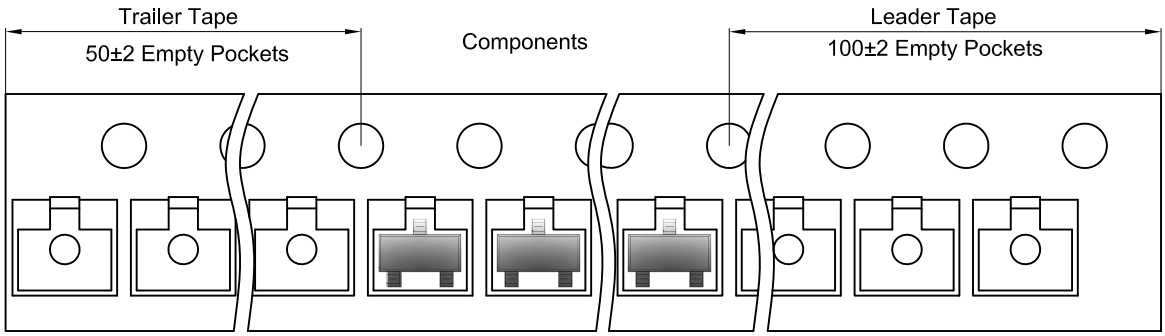

SOT-23 Reel

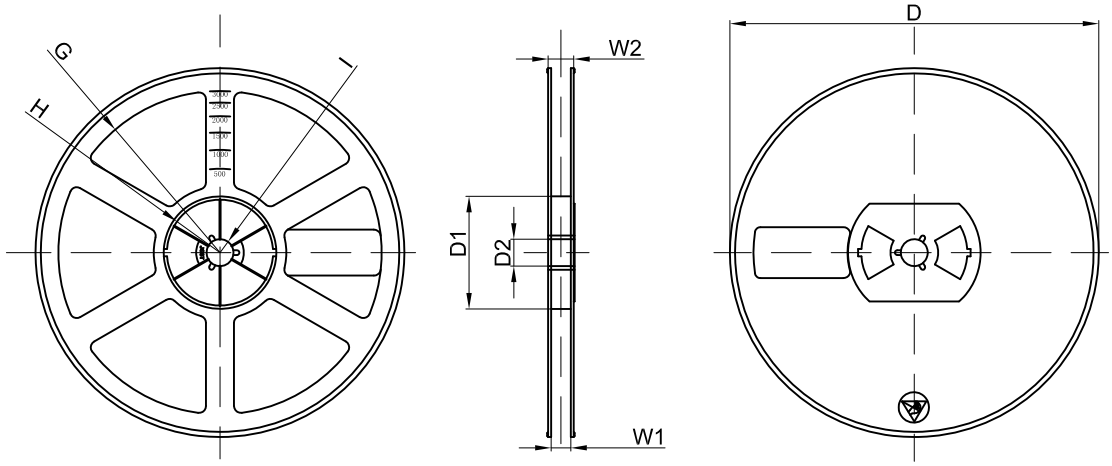

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×230	

Downloaded from alldatasheet.com