

6

5

4

3



2

1




Rev	AWO #	Description	Date	Appr
-		RELEASED	6/03/10	

APPROVED: _____

DATE: _____ TITLE: _____

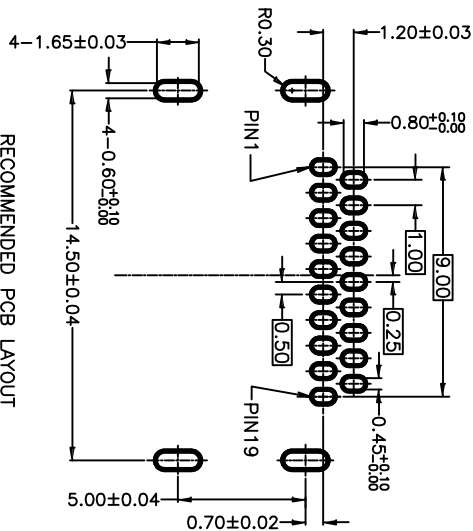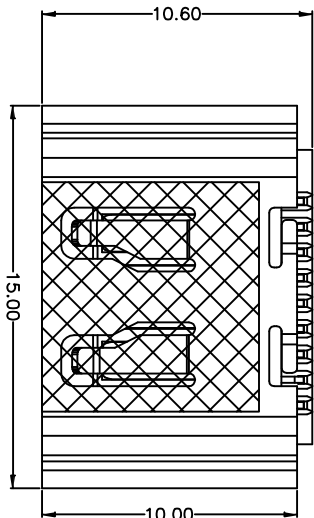

RECOMMENDED PCB LAYOUT
PCB (T=1.20±0.05)

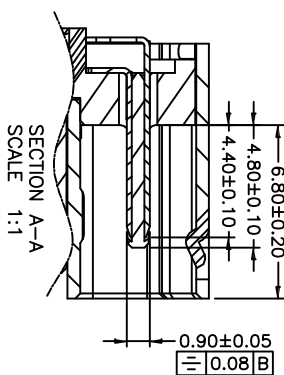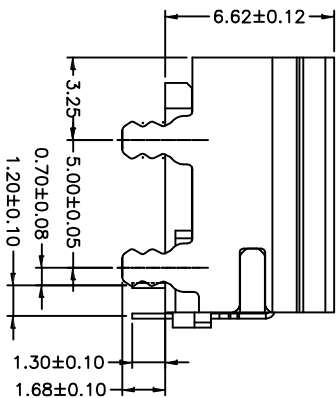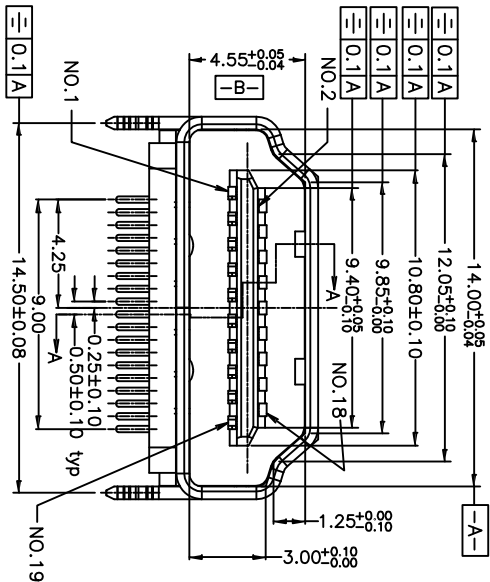

SECTION A-A
SCALE 1:1

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shield: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 300VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 10 mohms max.

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.



PACKAGED ON TAPE & REEL

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

HDMI CONNECTOR, RIGHT ANGLE
DIP TYPE, 2 ROWS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				HDMI CONNECTOR, RIGHT ANGLE			
Holes				DIP TYPE, 2 ROWS			
APPROVALS				DATE			
DRAWN				6/03/10			
CHECKED							
APPROVED							
SIZE				PART NO.			
X				HDMI-S-RA-1-RF-01-KT-T/R			
REF:				SCALE: NTS			
S00015C				SHEET 1 OF 1			