
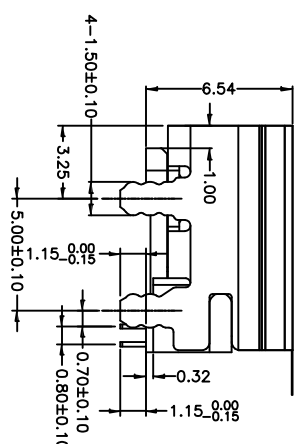
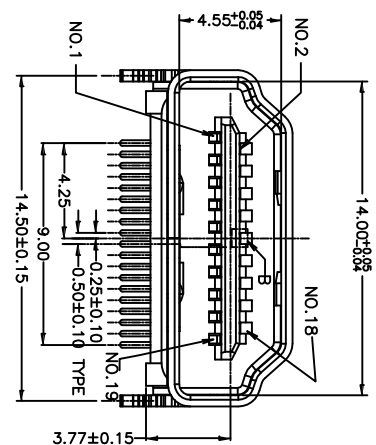
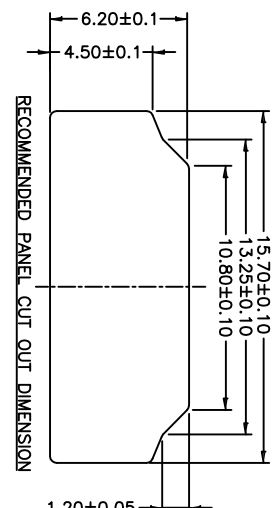
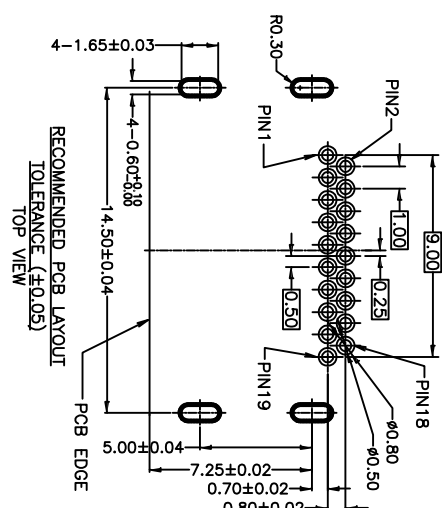


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/10	

APPROVED: _____

DATE: _____ TITLE: _____

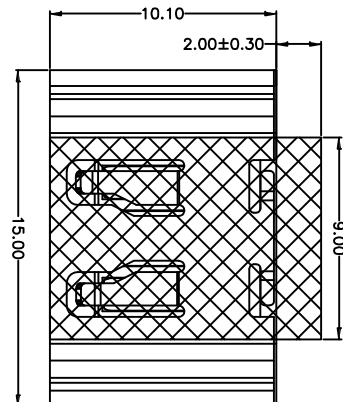

SPECIFICATIONS:

Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Nickel plated
Plating:
3u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails.

Electrical:
Voltage rating: 40V
Current rating: 0.5A
Dielectric strength: 300VAC for 1 minute min.
Insulation resistance: 100 Megohm min.
Contact resistance: 10 mohms max.

Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

PACKAGED ON TAPE & REEL



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710 HDMI CONNECTOR, RIGHT ANGLE DIP TYPE, 2 ROWS					
TOLERANCES: EXCEPT AS NOTED									
INCHES									
.X ± .10 ØX ± .10									
.XX ± .020 ØXX ± .015									
.XXX ± .015 ØXXX ± .010									
APPROVALS									
DATE									
DRAWN		DY						6/08/10	
CHECKED									
APPROVED									
SIZE		PART NO.		REV.					
X		HDMI-S-RA-1-RF-03-KT-T/R		-					
REF:		S00015C		SCALE: NTS					
				SHEET 1 OF 1					