

# HEF4517B

## Dual 64-bit static shift register

Rev. 06 — 10 December 2009

Product data sheet

### 1. General description

The HEF4517B consists of two identical, independent 64-bit static shift registers. Each register has separate clock (nCP), data input (nD), parallel input-enable/output-enable (nPE/ $\overline{\text{OE}}$ ) and four 3-state outputs of the 16th, 32nd, 48th, and 64th bit positions (nQ16 to nQ64). Data at the nD input is entered into the first bit on the LOW-to-HIGH transition of the clock, regardless of the state of nPE/ $\overline{\text{OE}}$ .

When nPE/ $\overline{\text{OE}}$  is LOW, the outputs are enabled and it is in the 64-bit serial mode.

When nPE/ $\overline{\text{OE}}$  is HIGH, the outputs are disabled (high-impedance OFF-state), the 64-bit shift register is divided into four 16-bit shift registers with nD, nQ16, nQ32 and nQ48 as data inputs of the 1st, 17th, 33rd, and 49th bit respectively. Schmitt-trigger action in the clock input makes the circuit highly tolerant of slower clock rise and fall times.

It operates over a recommended  $V_{DD}$  power supply range of 3 V to 15 V referenced to  $V_{SS}$  (usually ground). Unused inputs must be connected to  $V_{DD}$ ,  $V_{SS}$ , or another input. It is also suitable for use over the full industrial (–40 °C to +85 °C) temperature range.

### 2. Features

- Tolerant of slow clock rise and fall times
- Fully static operation
- 5 V, 10 V, and 15 V parametric ratings
- Standardized symmetrical output characteristics
- Operates across the full industrial temperature range –40 °C to +85 °C
- Complies with JEDEC standard JESD 13-B

### 3. Applications

- Industrial

### 4. Ordering information

**Table 1.** Ordering information

All types operate from –40 °C to +85 °C

| Type number | Package |                                                            | Version  |
|-------------|---------|------------------------------------------------------------|----------|
|             | Name    | Description                                                |          |
| HEF4517BP   | DIP16   | plastic dual in-line package; 16 leads (300 mil)           | SOT38-4  |
| HEF4517BT   | SO16    | plastic small outline package; 16 leads; body width 7.5 mm | SOT162-1 |

## 5. Functional diagram

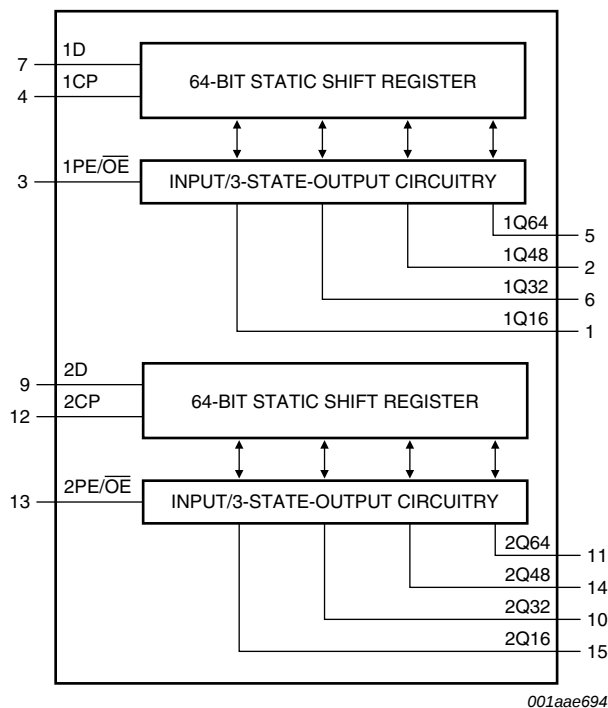


Fig 1. Functional diagram

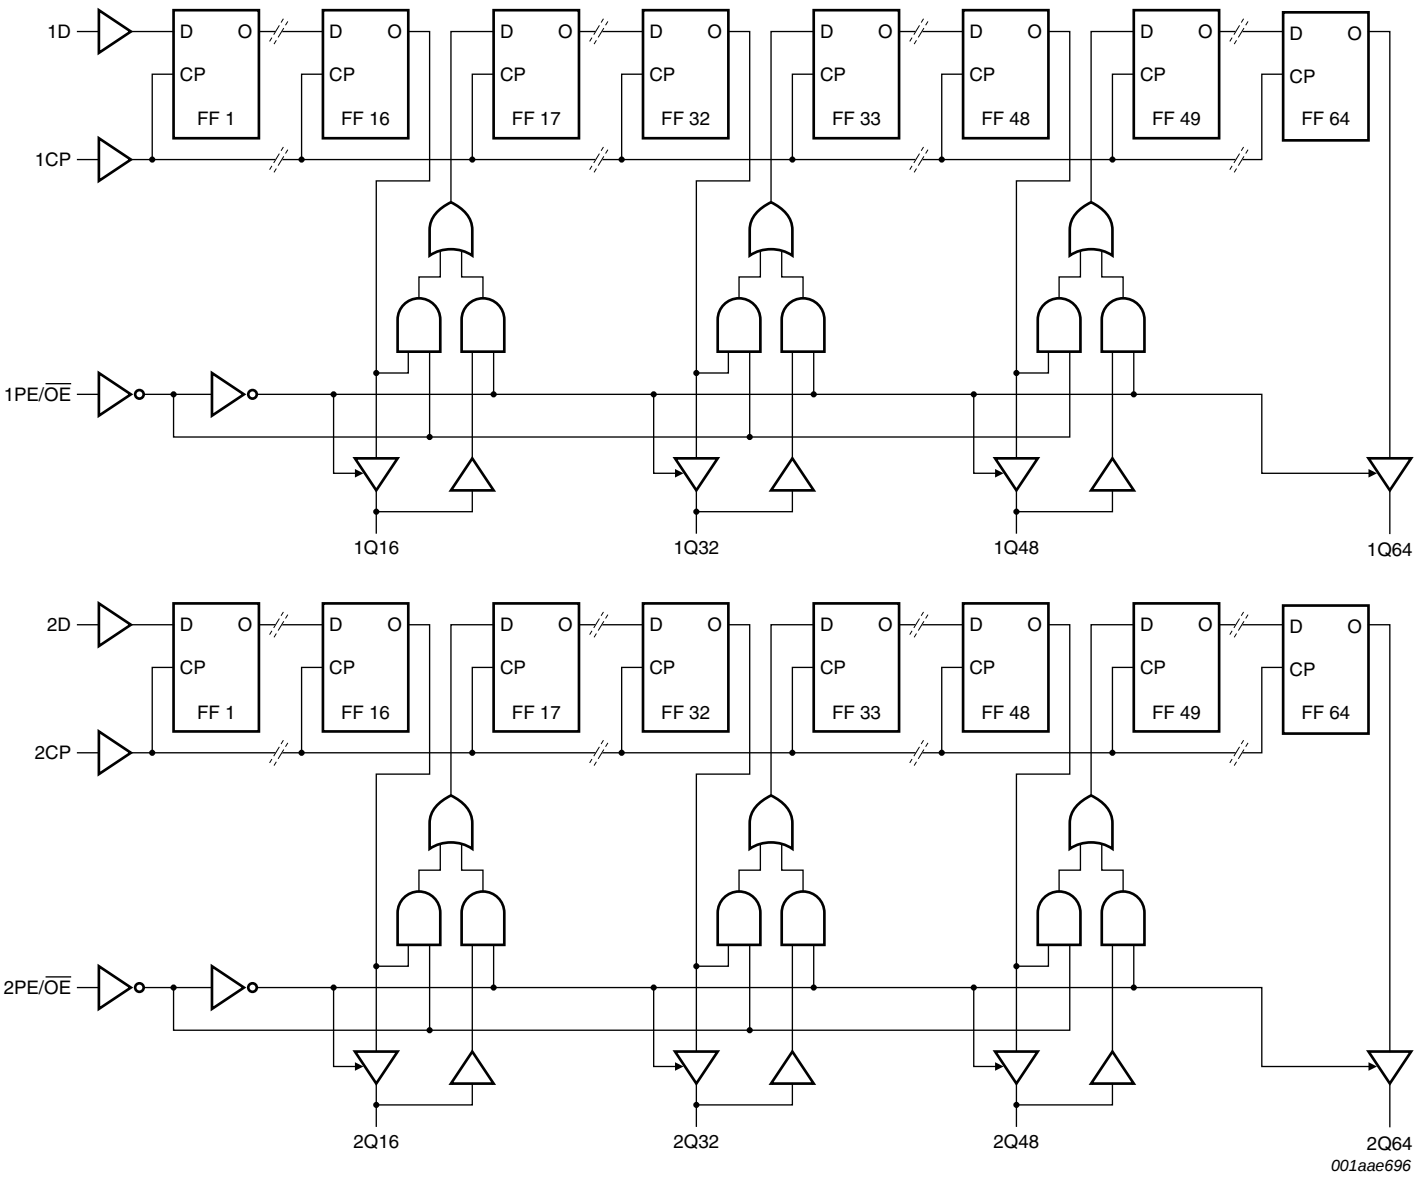


Fig 2. Logic diagram

6. Pinning information

6.1 Pinning

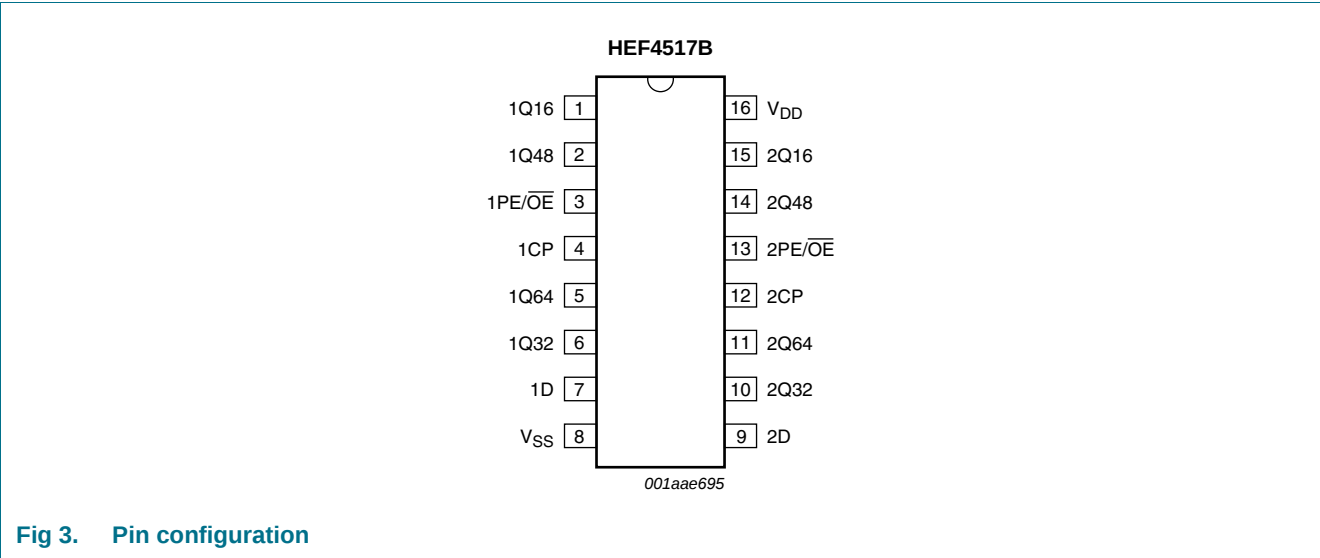


Fig 3. Pin configuration

6.2 Pin description

Table 2. Pin description

| Symbol                                      | Pin   | Description                               |
|---------------------------------------------|-------|-------------------------------------------|
| 1Q16, 2Q16                                  | 1, 15 | 3-state input/output                      |
| 1Q48, 2Q48                                  | 2, 14 | 3-state input/output                      |
| 1PE/ $\overline{OE}$ , 2PE/ $\overline{OE}$ | 3, 13 | parallel input-enable/output-enable input |
| 1CP, 2CP                                    | 4, 12 | clock input                               |
| 1Q64, 2Q64                                  | 5, 11 | 3-state input/output                      |
| 1Q32, 2Q32                                  | 6, 10 | 3-state input/output                      |
| 1D, 2D                                      | 7, 9  | data input                                |
| V <sub>SS</sub>                             | 8     | ground supply voltage                     |
| V <sub>DD</sub>                             | 16    | supply voltage                            |

## 7. Functional description

Table 3. Function table<sup>[1]</sup>

| Inputs |                           |        | Inputs/outputs                     |                                    |                                    |                               | Mode                                                                                     |
|--------|---------------------------|--------|------------------------------------|------------------------------------|------------------------------------|-------------------------------|------------------------------------------------------------------------------------------|
| nCP    | nD                        | nPE/OE | nQ16                               | nQ32                               | nQ48                               | nQ64                          |                                                                                          |
| ↑      | data entered into 1st bit | L      | content of 16th bit displayed      | content of 32nd bit displayed      | content of 48th bit displayed      | content of 64th bit displayed | One 64-bit shift register. The content of the shift register is shifted over one stage   |
| ↑      | data entered into 1st bit | H      | data at nQ16 entered into 17th bit | data at nQ32 entered into 33rd bit | data at nQ48 entered into 49th bit | remains in 'Z' state          | Four 16-bit shift register. The content of the shift registers is shifted over one stage |
| ↓      | X                         | L      | no change                          | no change                          | no change                          | no change                     | no change                                                                                |
| ↓      | X                         | H      | Z                                  | Z                                  | Z                                  | Z                             | no change                                                                                |

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance state;  
 ↑ = positive-going transition; ↓ = negative-going transition.

## 8. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol           | Parameter               | Conditions                                                          | Min              | Max                   | Unit |
|------------------|-------------------------|---------------------------------------------------------------------|------------------|-----------------------|------|
| V <sub>DD</sub>  | supply voltage          |                                                                     | -0.5             | +18                   | V    |
| I <sub>IK</sub>  | input clamping current  | V <sub>I</sub> < -0.5 V or V <sub>I</sub> > V <sub>DD</sub> + 0.5 V | -                | ±10                   | mA   |
| V <sub>I</sub>   | input voltage           |                                                                     | -0.5             | V <sub>DD</sub> + 0.5 | V    |
| I <sub>OK</sub>  | output clamping current | V <sub>O</sub> < -0.5 V or V <sub>O</sub> > V <sub>DD</sub> + 0.5 V | -                | ±10                   | mA   |
| I <sub>I/O</sub> | input/output current    |                                                                     | -                | ±10                   | mA   |
| I <sub>DD</sub>  | supply current          |                                                                     | -                | 50                    | mA   |
| T <sub>stg</sub> | storage temperature     |                                                                     | -65              | +150                  | °C   |
| T <sub>amb</sub> | ambient temperature     |                                                                     | -40              | +85                   | °C   |
| P <sub>tot</sub> | total power dissipation | DIP16 package                                                       | <sup>[1]</sup> - | 750                   | mW   |
|                  |                         | SO16 package                                                        | <sup>[2]</sup> - | 500                   | mW   |
| P                | power dissipation       | per output                                                          | -                | 100                   | mW   |

[1] For DIP16 package: P<sub>tot</sub> derates linearly with 12 mW/K above 70 °C.

[2] For SO16 package: P<sub>tot</sub> derates linearly with 8 mW/K above 70 °C.

## 9. Recommended operating conditions

**Table 5. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions             | Min | Typ | Max      | Unit            |
|---------------------|-------------------------------------|------------------------|-----|-----|----------|-----------------|
| $V_{DD}$            | supply voltage                      |                        | 3   | -   | 15       | V               |
| $V_I$               | input voltage                       |                        | 0   | -   | $V_{DD}$ | V               |
| $T_{amb}$           | ambient temperature                 | in free air            | -40 | -   | +85      | °C              |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{DD} = 5\text{ V}$  | -   | -   | 3.75     | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 10\text{ V}$ | -   | -   | 0.5      | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 15\text{ V}$ | -   | -   | 0.08     | $\mu\text{s/V}$ |

## 10. Static characteristics

**Table 6. Static characteristics**

$V_{SS} = 0\text{ V}$ ;  $V_I = V_{SS}$  or  $V_{DD}$  unless otherwise specified.

| Symbol   | Parameter                 | Conditions                     | $V_{DD}$ | $T_{amb} = -40\text{ °C}$ |           | $T_{amb} = 25\text{ °C}$ |           | $T_{amb} = 85\text{ °C}$ |           | Unit          |
|----------|---------------------------|--------------------------------|----------|---------------------------|-----------|--------------------------|-----------|--------------------------|-----------|---------------|
|          |                           |                                |          | Min                       | Max       | Min                      | Max       | Min                      | Max       |               |
| $V_{IH}$ | HIGH-level input voltage  | $ I_O  < 1\text{ }\mu\text{A}$ | 5 V      | 3.5                       | -         | 3.5                      | -         | 3.5                      | -         | V             |
|          |                           |                                | 10 V     | 7.0                       | -         | 7.0                      | -         | 7.0                      | -         | V             |
|          |                           |                                | 15 V     | 11.0                      | -         | 11.0                     | -         | 11.0                     | -         | V             |
| $V_{IL}$ | LOW-level input voltage   | $ I_O  < 1\text{ }\mu\text{A}$ | 5 V      | -                         | 1.5       | -                        | 1.5       | -                        | 1.5       | V             |
|          |                           |                                | 10 V     | -                         | 3.0       | -                        | 3.0       | -                        | 3.0       | V             |
|          |                           |                                | 15 V     | -                         | 4.0       | -                        | 4.0       | -                        | 4.0       | V             |
| $V_{OH}$ | HIGH-level output voltage | $ I_O  < 1\text{ }\mu\text{A}$ | 5 V      | 4.95                      | -         | 4.95                     | -         | 4.95                     | -         | V             |
|          |                           |                                | 10 V     | 9.95                      | -         | 9.95                     | -         | 9.95                     | -         | V             |
|          |                           |                                | 15 V     | 14.95                     | -         | 14.95                    | -         | 14.95                    | -         | V             |
| $V_{OL}$ | LOW-level output voltage  | $ I_O  < 1\text{ }\mu\text{A}$ | 5 V      | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V             |
|          |                           |                                | 10 V     | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V             |
|          |                           |                                | 15 V     | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V             |
| $I_{OH}$ | HIGH-level output current | $V_O = 2.5\text{ V}$           | 5 V      | -1.7                      | -         | -1.4                     | -         | -1.1                     | -         | mA            |
|          |                           | $V_O = 4.6\text{ V}$           | 5 V      | -0.52                     | -         | -0.44                    | -         | -0.36                    | -         | mA            |
|          |                           | $V_O = 9.5\text{ V}$           | 10 V     | -1.3                      | -         | -1.1                     | -         | -0.9                     | -         | mA            |
|          |                           | $V_O = 13.5\text{ V}$          | 15 V     | -3.6                      | -         | -3.0                     | -         | -2.4                     | -         | mA            |
| $I_{OL}$ | LOW-level output current  | $V_O = 0.4\text{ V}$           | 5 V      | 0.52                      | -         | 0.44                     | -         | 0.36                     | -         | mA            |
|          |                           | $V_O = 0.5\text{ V}$           | 10 V     | 1.3                       | -         | 1.1                      | -         | 0.9                      | -         | mA            |
|          |                           | $V_O = 1.5\text{ V}$           | 15 V     | 3.6                       | -         | 3.0                      | -         | 2.4                      | -         | mA            |
| $I_I$    | input leakage current     |                                | 15 V     | -                         | $\pm 0.3$ | -                        | $\pm 0.3$ | -                        | $\pm 1.0$ | $\mu\text{A}$ |
| $I_{DD}$ | supply current            | $I_O = 0\text{ A}$             | 5 V      | -                         | 50        | -                        | 50        | -                        | 375       | $\mu\text{A}$ |
|          |                           |                                | 10 V     | -                         | 100       | -                        | 100       | -                        | 750       | $\mu\text{A}$ |
|          |                           |                                | 15 V     | -                         | 200       | -                        | 200       | -                        | 1500      | $\mu\text{A}$ |
| $C_I$    | input capacitance         |                                | -        | -                         | -         | -                        | 7.5       | -                        | -         | pF            |

## 11. Dynamic characteristics

**Table 7. Dynamic characteristics**

$V_{SS} = 0\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; for test circuit see [Figure 8](#); unless otherwise specified.

| Symbol    | Parameter                           | Conditions                                                | $V_{DD}$ | Extrapolation formula                        | Min | Typ | Max | Unit |
|-----------|-------------------------------------|-----------------------------------------------------------|----------|----------------------------------------------|-----|-----|-----|------|
| $t_{PHL}$ | HIGH to LOW propagation delay       | nCP to nQn; see <a href="#">Figure 4</a>                  | 5 V      | [1] $193\text{ ns} + (0.55\text{ ns/pF})C_L$ | -   | 220 | 440 | ns   |
|           |                                     |                                                           | 10 V     | $74\text{ ns} + (0.23\text{ ns/pF})C_L$      | -   | 85  | 170 | ns   |
|           |                                     |                                                           | 15 V     | $52\text{ ns} + (0.16\text{ ns/pF})C_L$      | -   | 60  | 120 | ns   |
| $t_{PLH}$ | LOW to HIGH propagation delay       | nCP to nQn; see <a href="#">Figure 4</a>                  | 5 V      | [1] $163\text{ ns} + (0.55\text{ ns/pF})C_L$ | -   | 190 | 380 | ns   |
|           |                                     |                                                           | 10 V     | $64\text{ ns} + (0.23\text{ ns/pF})C_L$      | -   | 75  | 150 | ns   |
|           |                                     |                                                           | 15 V     | $42\text{ ns} + (0.16\text{ ns/pF})C_L$      | -   | 50  | 100 | ns   |
| $t_{PHZ}$ | HIGH to OFF-state propagation delay | nPE/ $\overline{OE}$ to nQn; see <a href="#">Figure 5</a> | 5 V      |                                              | -   | 40  | 80  | ns   |
|           |                                     |                                                           | 10 V     |                                              | -   | 30  | 60  | ns   |
|           |                                     |                                                           | 15 V     |                                              | -   | 25  | 50  | ns   |
| $t_{PZH}$ | OFF-state to HIGH propagation delay | nPE/ $\overline{OE}$ to nQn; see <a href="#">Figure 5</a> | 5 V      |                                              | -   | 45  | 90  | ns   |
|           |                                     |                                                           | 10 V     |                                              | -   | 25  | 50  | ns   |
|           |                                     |                                                           | 15 V     |                                              | -   | 20  | 40  | ns   |
| $t_{PLZ}$ | LOW to OFF-state propagation delay  | nPE/ $\overline{OE}$ to nQn; see <a href="#">Figure 5</a> | 5 V      |                                              | -   | 50  | 100 | ns   |
|           |                                     |                                                           | 10 V     |                                              | -   | 30  | 60  | ns   |
|           |                                     |                                                           | 15 V     |                                              | -   | 25  | 50  | ns   |
| $t_{PZL}$ | OFF-state to LOW propagation delay  | nPE/ $\overline{OE}$ to nQn; see <a href="#">Figure 5</a> | 5 V      |                                              | -   | 60  | 120 | ns   |
|           |                                     |                                                           | 10 V     |                                              | -   | 30  | 60  | ns   |
|           |                                     |                                                           | 15 V     |                                              | -   | 25  | 50  | ns   |
| $t_t$     | transition time                     | nQn; see <a href="#">Figure 6</a>                         | 5 V      | [1] $10\text{ ns} + (1.00\text{ ns/pF})C_L$  | -   | 60  | 120 | ns   |
|           |                                     |                                                           | 10 V     | $9\text{ ns} + (0.42\text{ ns/pF})C_L$       | -   | 30  | 60  | ns   |
|           |                                     |                                                           | 15 V     | $6\text{ ns} + (0.28\text{ ns/pF})C_L$       | -   | 20  | 40  | ns   |
| $t_{su}$  | set-up time                         | nQn, nD to nCP; see <a href="#">Figure 7</a>              | 5 V      |                                              | 30  | 10  | -   | ns   |
|           |                                     |                                                           | 10 V     |                                              | 25  | 5   | -   | ns   |
|           |                                     |                                                           | 15 V     |                                              | 20  | 5   | -   | ns   |
| $t_h$     | hold time                           | nQn, nD to nCP; see <a href="#">Figure 7</a>              | 5 V      |                                              | 45  | 15  | -   | ns   |
|           |                                     |                                                           | 10 V     |                                              | 30  | 10  | -   | ns   |
|           |                                     |                                                           | 15 V     |                                              | 25  | 10  | -   | ns   |
| $t_w$     | pulse width                         | nQn, nD to nCP; see <a href="#">Figure 7</a>              | 5 V      |                                              | -   | 95  | 190 | ns   |
|           |                                     |                                                           | 10 V     |                                              | -   | 40  | 80  | ns   |
|           |                                     |                                                           | 15 V     |                                              | -   | 30  | 60  | ns   |
| $f_{max}$ | maximum frequency                   | see <a href="#">Figure 7</a>                              | 5 V      |                                              | 2   | 5   | -   | MHz  |
|           |                                     |                                                           | 10 V     |                                              | 6   | 12  | -   | MHz  |
|           |                                     |                                                           | 15 V     |                                              | 8   | 16  | -   | MHz  |

[1] The typical values of the propagation delay and transition times are calculated from the extrapolation formulas shown ( $C_L$  in pF).

Table 8. Dynamic power dissipation  $P_D$

$P_D$  can be calculated from the formulas shown.  $V_{SS} = 0\text{ V}$ ;  $t_r = t_f \leq 20\text{ ns}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ .

| Symbol | Parameter                 | $V_{DD}$ | Typical formula for $P_D$ ( $\mu\text{W}$ )                       | where:                                                                                                                                                                                             |
|--------|---------------------------|----------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $P_D$  | dynamic power dissipation | 5 V      | $P_D = 7000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$  | $f_i$ = input frequency in MHz,<br>$f_o$ = output frequency in MHz,<br>$C_L$ = output load capacitance in pF,<br>$V_{DD}$ = supply voltage in V,<br>$\Sigma(f_o \times C_L)$ = sum of the outputs. |
|        |                           | 10 V     | $P_D = 28000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ |                                                                                                                                                                                                    |
|        |                           | 15 V     | $P_D = 70000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ |                                                                                                                                                                                                    |

12. Waveforms


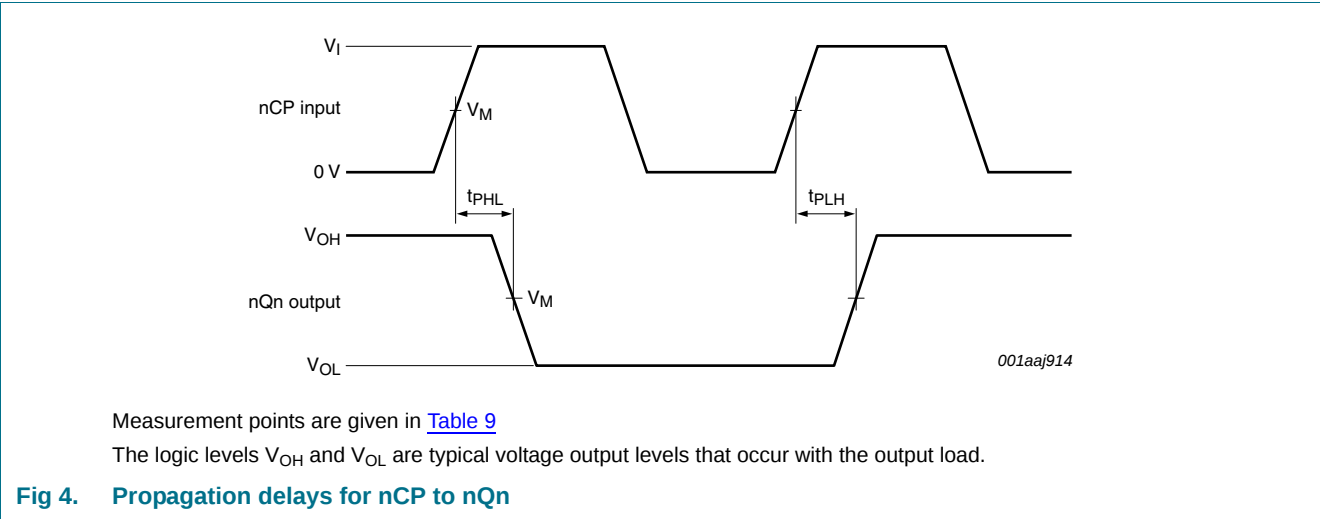


Table 9. Measurement points


| Input    | Output      |             |             |
|----------|-------------|-------------|-------------|
| $V_M$    | $V_M$       | $V_X$       | $V_Y$       |
| $0.5V_I$ | $0.5V_{DD}$ | $0.1V_{DD}$ | $0.9V_{DD}$ |

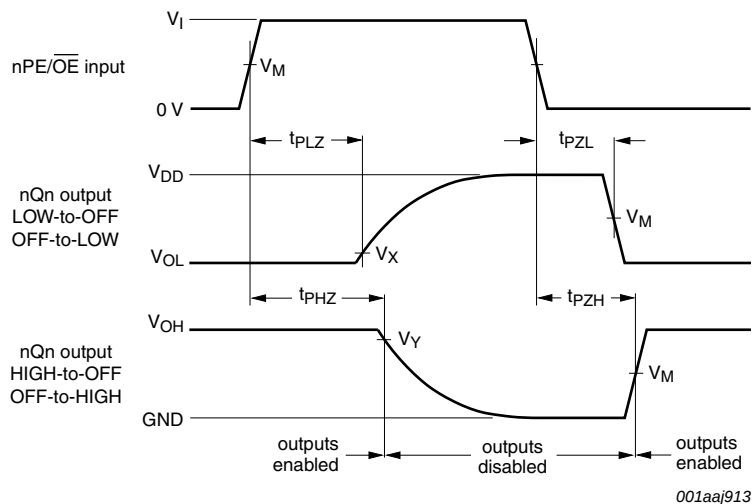

Measurement points are given in [Table 9](#)


The logic levels  $V_{OH}$  and  $V_{OL}$  are typical voltage output levels that occur with the output load.

**Fig 5. Enable and disable times and 3-state propagation delays**

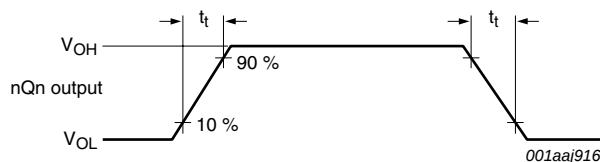

The logic levels  $V_{OH}$  and  $V_{OL}$  are typical voltage output levels that occur with the output load.

**Fig 6. Transition times for nQn**

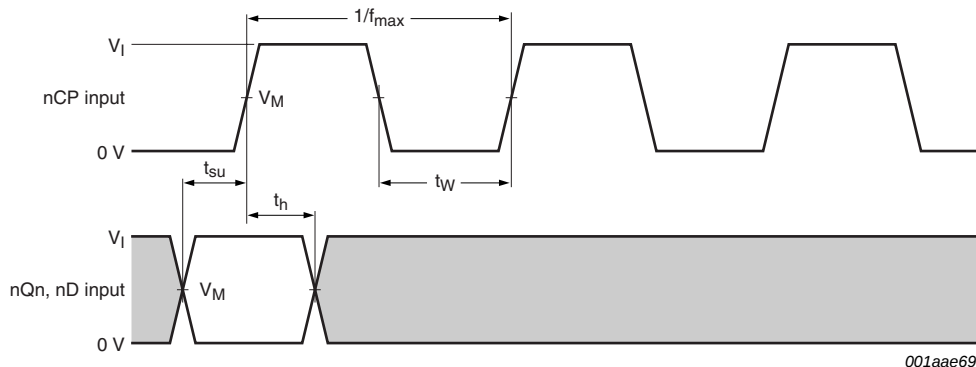


The shading indicates where the data (nQn and nD) is permitted to change for predictable output changes.


Measurement points are given in [Table 9](#)

The logic levels  $V_{OH}$  and  $V_{OL}$  are typical voltage output levels that occur with the output load.

**Fig 7. Waveforms showing minimum clock pulse width and maximum frequency and set-up and hold times for nQn (as data input) or nD to nCP**

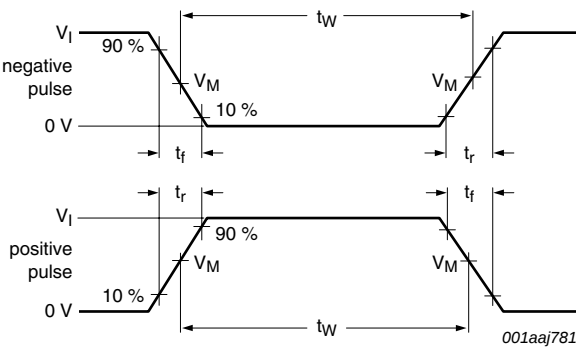

a. Input waveforms

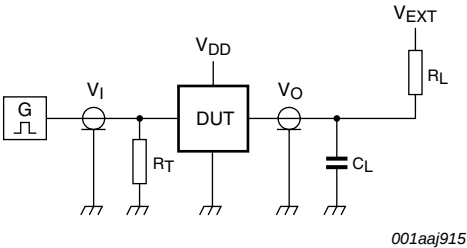

b. Test circuit

Test data is given in [Table 10](#).

Definitions for test circuit:

$R_L$  = Load resistance;

$C_L$  = Load capacitance including jig and probe capacitance;

$R_T$  = Termination resistance should be equal to output impedance  $Z_o$  of the pulse generator.

Fig 8. Test circuit for switching times

Table 10. Test data

| Supply voltage | Input    |              | Load  |              | $V_{EXT}$          |                    |                    |
|----------------|----------|--------------|-------|--------------|--------------------|--------------------|--------------------|
|                | $V_I$    | $t_r, t_f$   | $C_L$ | $R_L$        | $t_{PLH}, t_{PHL}$ | $t_{PLZ}, t_{PZL}$ | $t_{PHZ}, t_{PZH}$ |
| 5 V to 15 V    | $V_{DD}$ | $\leq 20$ ns | 50 pF | 1 k $\Omega$ | open               | $2V_{DD}$          | GND                |

13. Package outline

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

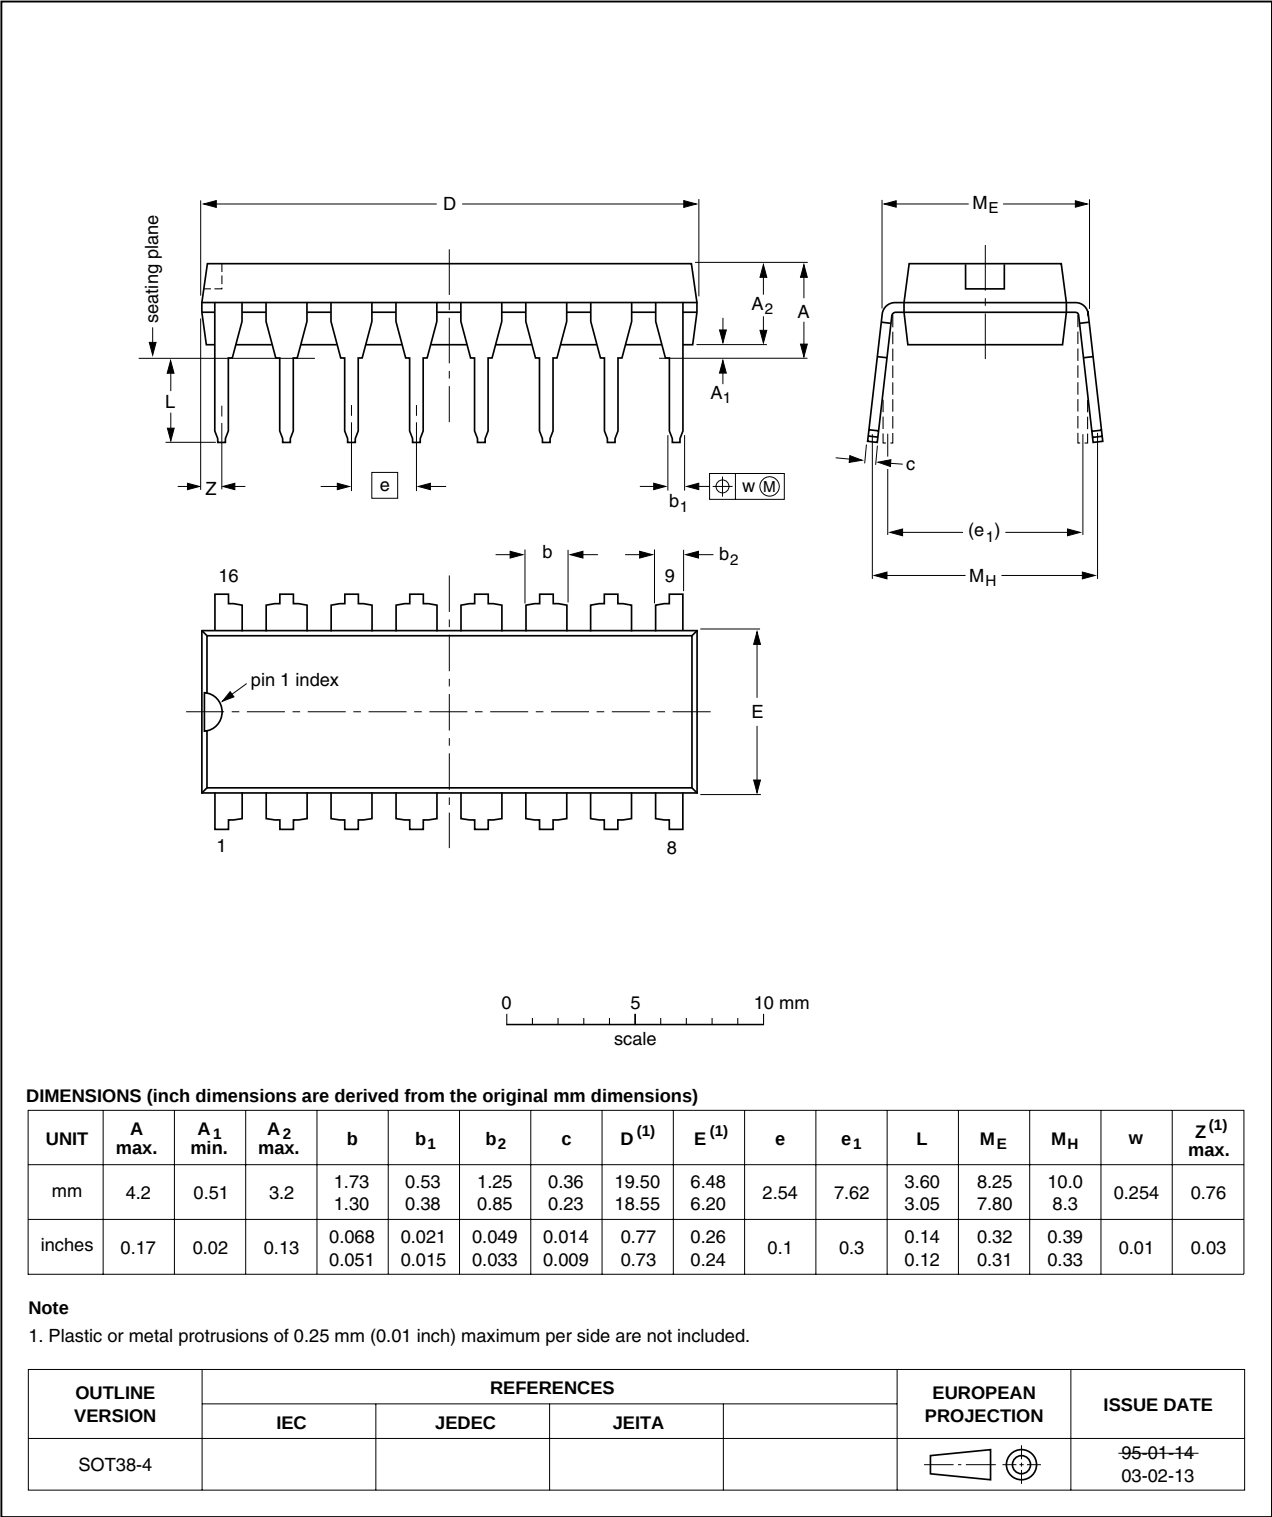


Fig 9. Package outline SOT38-4 (DIP16)

SO16: plastic small outline package; 16 leads; body width 7.5 mm

SOT162-1

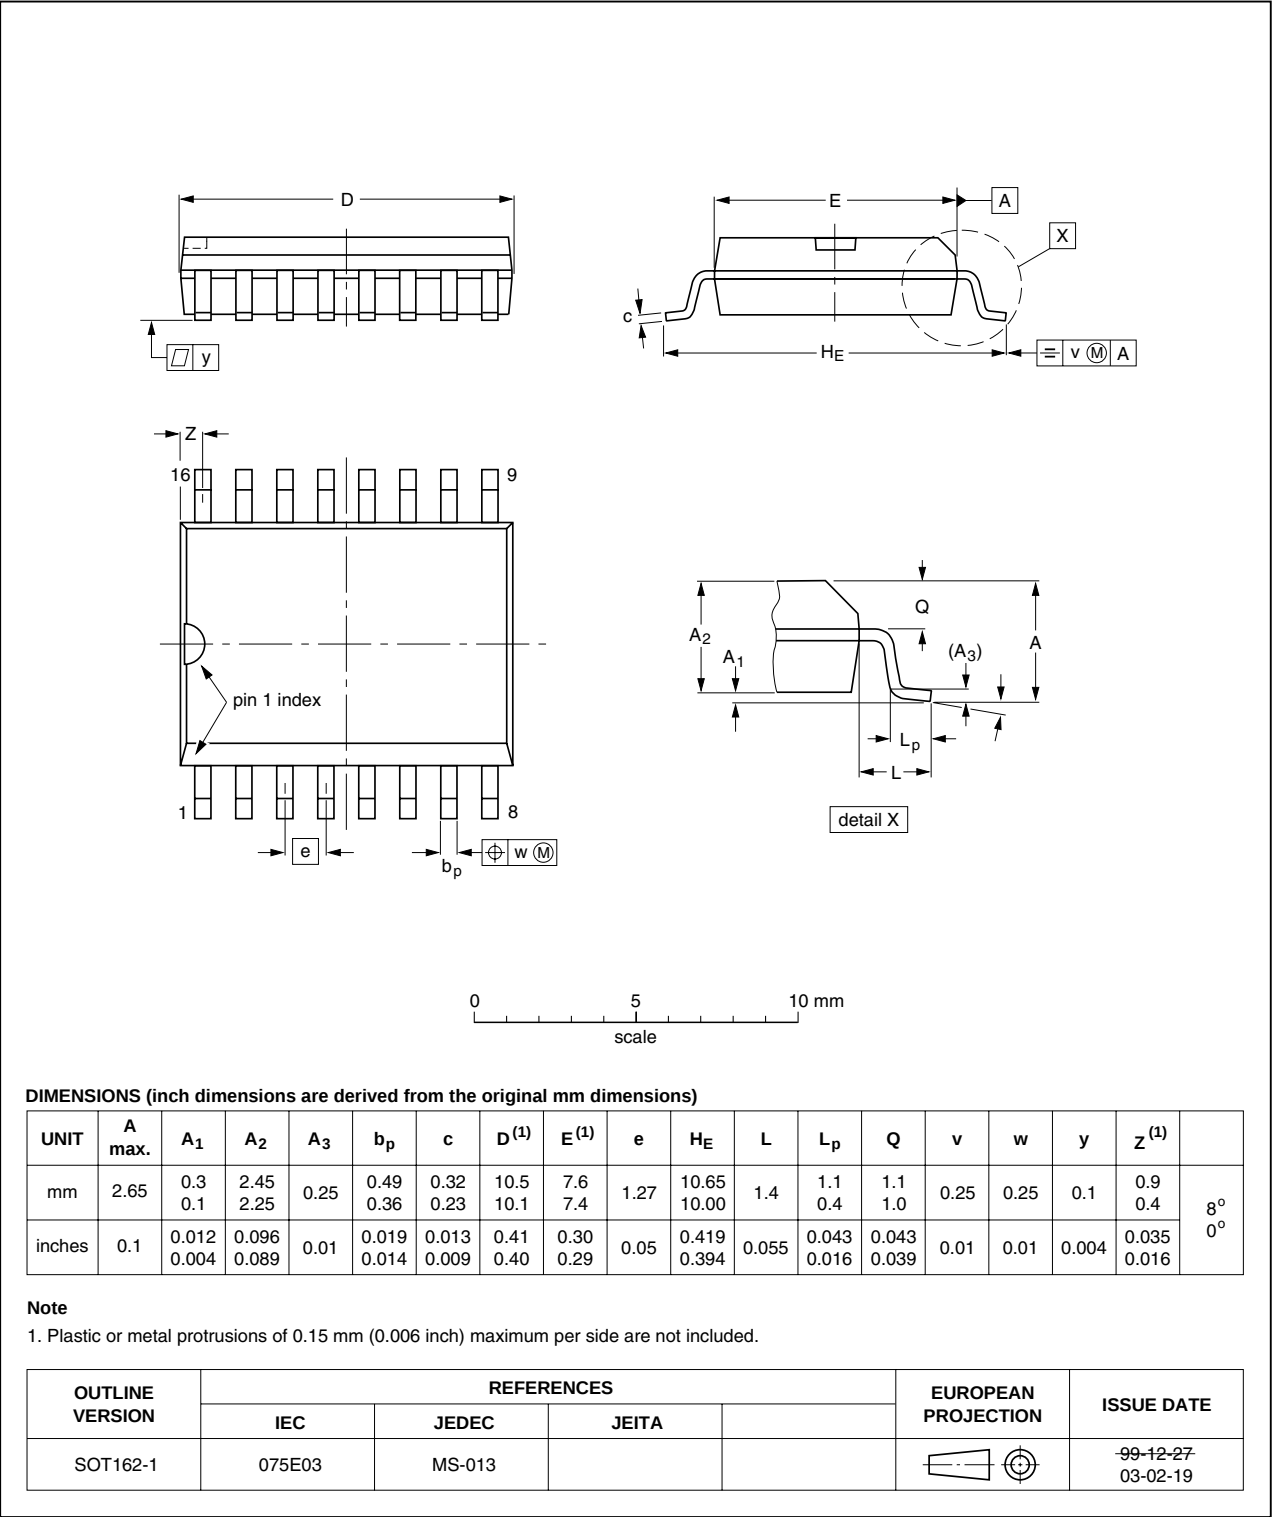


Fig 10. Package outline SOT162-1 (SO16)

## 14. Revision history

Table 11. Revision history

| Document ID    | Release date                                                                                       | Data sheet status     | Change notice | Supersedes     |
|----------------|----------------------------------------------------------------------------------------------------|-----------------------|---------------|----------------|
| HEF4517B_6     | 20091210                                                                                           | Product data sheet    | -             | HEF4517B_5     |
| Modifications: | • <a href="#">Section 9 "Recommended operating conditions"</a> $\Delta t/\Delta V$ values updated. |                       |               |                |
| HEF4517B_5     | 20090728                                                                                           | Product data sheet    | -             | HEF4517B_4     |
| HEF4517B_4     | 20090406                                                                                           | Product data sheet    | -             | HEF4517B_CNV_3 |
| HEF4517B_CNV_3 | 19950101                                                                                           | Product specification | -             | HEF4517B_CNV_2 |
| HEF4517B_CNV_2 | 19950101                                                                                           | Product specification | -             | -              |

## 15. Legal information

### 15.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 15.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 15.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

### 15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 16. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

17. Contents

1 General description . . . . . 1

2 Features . . . . . 1

3 Applications . . . . . 1

4 Ordering information . . . . . 1

5 Functional diagram . . . . . 2

6 Pinning information . . . . . 4

6.1 Pinning . . . . . 4

6.2 Pin description . . . . . 4

7 Functional description . . . . . 5

8 Limiting values . . . . . 5

9 Recommended operating conditions . . . . . 6

10 Static characteristics . . . . . 6

11 Dynamic characteristics . . . . . 7

12 Waveforms . . . . . 8

13 Package outline . . . . . 11

14 Revision history . . . . . 13

15 Legal information . . . . . 14

15.1 Data sheet status . . . . . 14

15.2 Definitions . . . . . 14

15.3 Disclaimers . . . . . 14

15.4 Trademarks . . . . . 14

16 Contact information . . . . . 14

17 Contents . . . . . 15



Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.