

HL-D3 SERIES

■ General terms and conditions..... F-3

■ Selection guide P.1021~

Related Information

■ Glossary of terms / General precautions P.1587 / P.1595

■ About laser beam..... P.1593~

■ Korea's KC-mark P.1602

Ver.2



panasonic.net/id/pidsx/global

CE

FDA
Conforming to
FDA regulations
(HL-D301B/D301C only)



This product is classified as a Class 2 / Class 3R Laser Product in IEC / JIS standards and FDA* regulations. Do not look at the laser beam directly or through optical devices such as a lens.

* This product complies with 21 CFR 1040.10 and 1040.11 Laser Notice No. 50, dated June 24, 2007, issued by CDRH (Center for Devices and Radiological Health) under the FDA (Food and Drug Administration).

High-precision laser with a resolution of 1 μm 0.039 mil

The functionality of 500 displacement sensors in just a 12.5 mm 0.492 in wide device!

High speed multi-point sensing and stable appearance measurement in one device

The HL-D3 series was developed based on a new concept of capturing the shape of objects with "points" instead of a "line." The new displacement sensors feature the following enhancements while not compromising the Z-axis resolution:

1 Faster measurement, achieved by selecting only the desired sensing points

2 Adjustable light intensity for each sensing point, which contributes to stable, precision detection

This is equivalent to the performance of 500 high-precision displacement sensors with a resolution of 1 μm 0.039 mil.

Measurement center distance and range (Z axis)

50 $\pm$ 10 mm 1.969 $\pm$ 0.394 in

Measurement range of width (X axis)

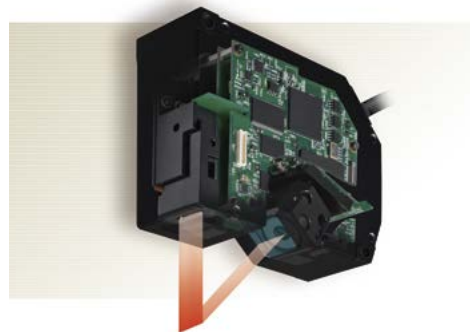
12.5 mm 0.492 in

Sampling rate

Max. speed 80 μs
(2-point specified)

Resolution (Z axis)

1 μm 0.039 mil
(average number of samples: 64)



Conventional model

HL-D3

HL-D3 uses parallel beams made possible by the latest optical system. The reduced area of shadow that appears when the emitted light strikes the target object make it possible to accurately determine the shape of the object.



Upgraded version with enhanced functionality Ver.2

Upgraded version of the HL-D3 series. Featuring added functions and a greater range of applications.

Main added functions * Products produced from September 2013 have been upgraded to Ver. 2.

- X position correct function
- OUT-OUT calculation
- Measurement area mask function
- I/O terminal function
- Specular reflection coefficient setting

FIBER SENSORS
LASER SENSORS
PHOTOELECTRIC SENSORS
MICRO PHOTOELECTRIC SENSORS
AREA SENSORS
SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY MANAGEMENT SOLUTIONS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS

Selection Guide
Laser Displacement
Magnetic Displacement
Contact Displacement
Collimated Beam Sensors
Metal-sheet Double-feed Detection
Digital Panel Controller
Other Products

HL-G1
HL-C2
HL-D3

Four modes for different measurement requirements

The **HL-D3** series is equipped with four sensing modes to enable to a variety of measurement needs, including in-line high-speed sensing and off-line high-precision detection.

Multi-select displacement sensing mode **MSDS**

The displacement sensor senses up to 10 measurement points specified on the X axis (measurement range of width) and completes the judgment at extremely high speed.

Refer to p.1066 for more information.

Multi-zone beam control measurement mode **MZBC**

High-precision sensing is achieved by segmenting the measurement range of width (X axis) to optimize light intensity. This mode is suitable for the sensing of objects with varied glossiness or color.

Refer to p.1068 for more information.

Whole synchronized measurement mode

The displacement sensor performs sensing of all target objects with the same sensitivity adjustment throughout the entire measurement range of width (X axis). This mode is suitable for the sensing of fast-moving objects.

Constant pitch measurement mode

Sensing is performed at even intervals by adjusting the sensitivity per the pitch specified along the measurement range of width (X axis). High-speed sensing is made possible by the reduced number of sensing points.

Multiple shape calculation functions and two judgment outputs

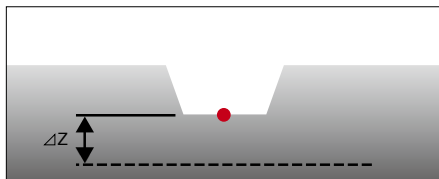
The **HL-D3** series calculates the shapes, including the height difference, width, and cross-sectional area, from the shape waveform based on the received light. At the same time, the displacement sensor uses these calculation results to instantaneously make Hi / Go / Lo judgments based on the present upper and lower limits.

(Only height calculation and step calculation in multi-select displacement sensing mode)

Thanks to the two sets of output, different shape calculations can be performed for each output or two sensor heads can be connected and used to output each judgment results.


Height calculation

The height difference between the reference value and measured value is calculated.




Step calculation

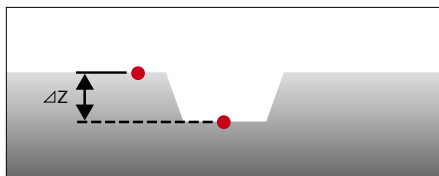The height difference is calculated from 2 measured values.




Width calculation

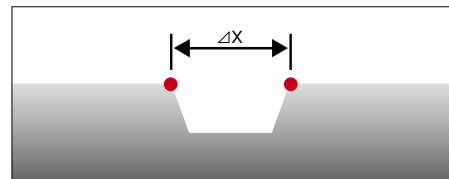The width is calculated from 2 measured values.



Cross-sectional area calculation

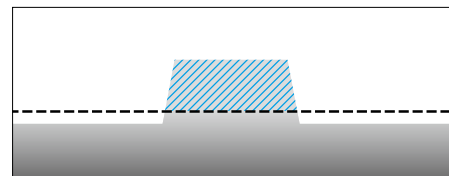HL-D3 calculates the cross-sectional area defined by the reference value.



Settings & monitoring software (HL-D3SMI) provided as standard

Conditions and the monitoring of measurements and judgment results can easily be set up by connecting to the **HL-D3C** controller and a PC pre-installed with **HL-D3SMI** using USB cables. The shape waveform based on the saved data can be reproduced on screen, which allows for it to be used as an analytical tool.

Refer to the columns on p.1066 and 1068.

Operating environment

OS	Microsoft Windows® 7 Professional 32-bit / 64-bit Microsoft Windows® 8 Pro 32-bit / 64-bit Microsoft Windows® 10 Pro 32-bit / 64-bit (Japanese, English, Chinese)
CPU	1 GHz or higher
Memory	2 GB or higher
Screen display	SXGA (1,280 × 1,024 full colors) or more
Hard disc	50 MB or more of available memory
USB interface	USB 2.0 Full Speed (USB 1.1 compatible) compliant

* A CD-ROM drive is required for installation.

* Microsoft Windows is a registered trademarks of Microsoft Corporation in the United States and other countries.


* Pentium is a registered trademark of Intel Corporation.

Main (Settings) screen



The main screen is where you set up the controller operations and the conditions for the sensor head and individual functions.

Received light intensity image screen



On this screen, you can review the light receiving status of the 2D image sensor built into the sensor head, as well as the shape waveform of the measured values.

FIBER SENSORS
LASER SENSORS
PHOTOELECTRIC SENSORS
MICRO PHOTOELECTRIC SENSORS
AREA SENSORS
SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS

SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS

PLC
HUMAN MACHINE INTERFACES
ENERGY MANAGEMENT SOLUTIONS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS

Selection Guide
Laser Displacement
Magnetic Displacement
Contact Displacement
Collimated Beam Sensors
Metal-sheet Double-feed Detection
Digital Panel Controller
Other Products

HL-G1

HL-C2

HL-D3

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS /
SAFETY COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONS

FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideLaser
DisplacementMagnetic
DisplacementContact
DisplacementCollimated
Beam SensorsMetal-sheet
Double-feed DetectionDigital Panel
Controller

Other Products

HL-G1

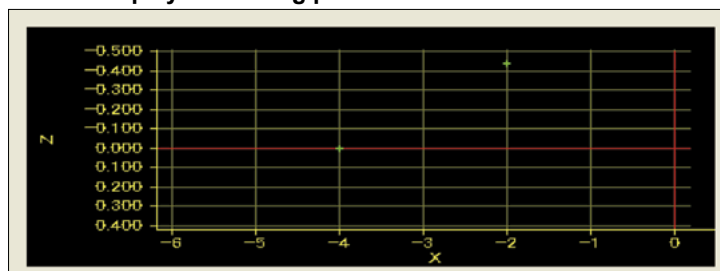
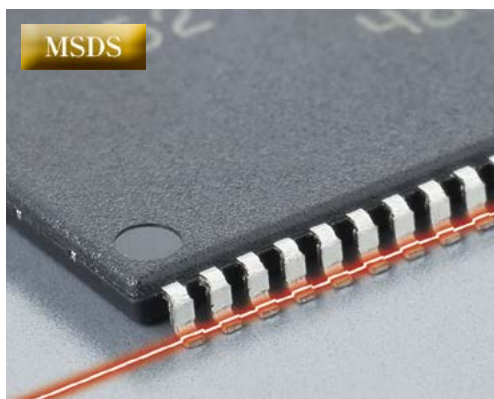
HL-C2

HL-D3



Multi-select displacement sensing**Application** Checking for loose screws

Missing and loose screws can be detected by sensing the displacement of the screw head from the reference plane. **HL-D3** provides Hi / Go / Lo judgment based on the sensing results.

When two sensing points are used, in-line testing can be performed by virtue of the sensing performance that realizes a sampling rate of 80 μ s.

Screen display of sensing points in MSDS mode**Screen display of calculated value and judgment****Application** Detecting misaligned pins on surface mounted components

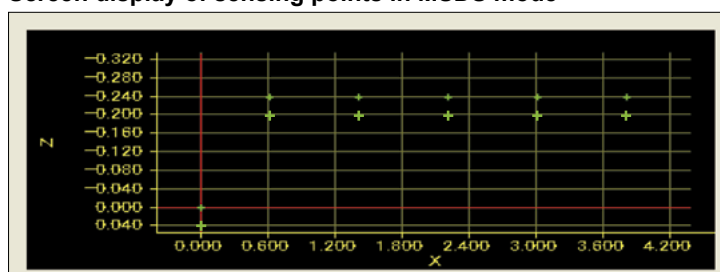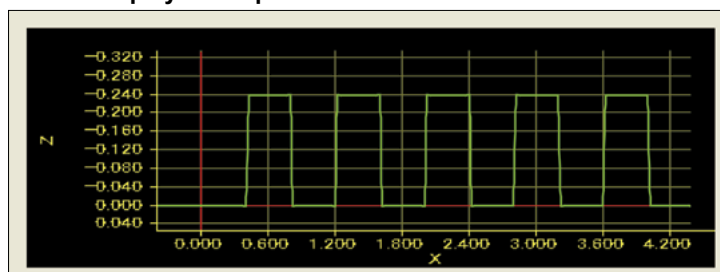HL-D3 can even sense the tiny pins of surface mounting components. The measured values can be managed by setting the reference plane and pins as sensing points.

Screen display of sensing points in MSDS mode**Screen display of shape waveform in MZBC mode**

Multi-select displacement sensing**What is multi-select displacement sensing?** **MSDS**

Conventional 2D displacement sensors produced the measurements of the specified points after sensing the entire measurement range of width (X axis), which made them unsuitable for high-speed sensing.

The **HL-D3** series performs efficient internal processing by sensing only the displacements at the specified points. This feature enables super-fast measurement, from sensing to calculation and judgment. Sensitivity is also adjusted at each point to ensure optimized sensing in order to also achieve high precision.

(MSDS: Multi-Select Displacement Sensing)

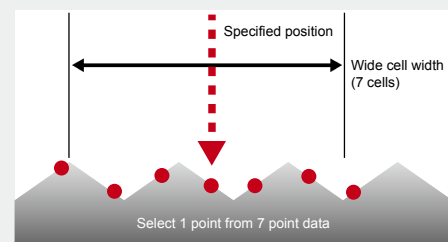
[Features]

- High-speed sampling
 - Max. speed 80 μ s (for 2-point specified)
- Sensing points can be specified as desired
 - Up to 10 points
- Measurements of specified points can be buffered
- Height, step calculation, and judgment results can be output
- Wide-cell function


[Wide-cell function]

When the surface condition is rough, such as with cut metal, sensing of a single point will result in errors due to the uneven surface.


The wide-cell function expands the sensing points for the light receiving side and obtains the mean value (or maximum or minimum value, depending on the setting) to improve the stability of the measurements.

**HL-D3SMI (monitoring software) can** **PART 1**

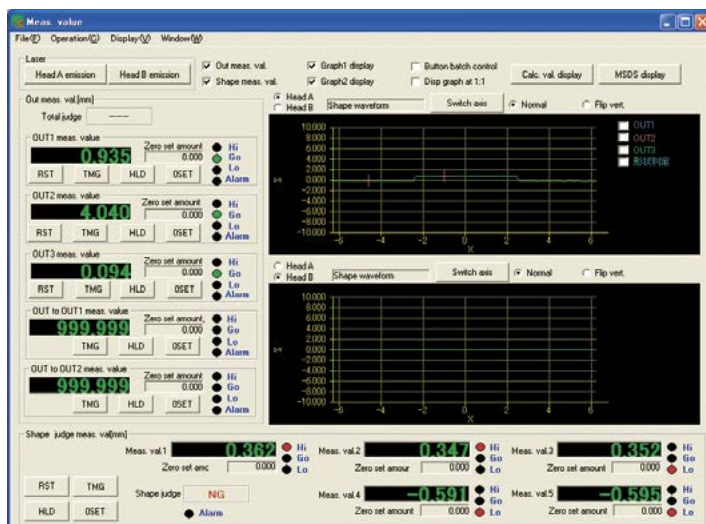- Easily identify the sensed point based on the display of the displacement shape waveform obtained from the light intensity waveform
- Display the calculation area along with the displacement shape waveform in order to enable an instant understanding of the calculated point and area
- Display the calculated values of height difference, width, and cross-sectional area on the screen
- List the displacement value of each sensing point when operating in MSDS mode



Screen displaying measured values

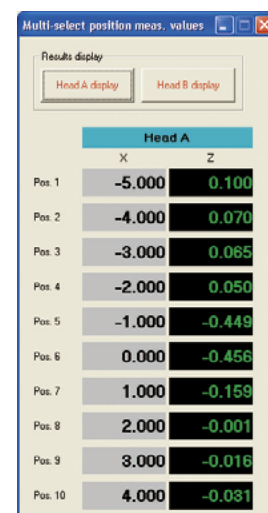

Screen displaying multi-point displacement values

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

- Laser Displacement
- Magnetic Displacement
- Contact Displacement
- Collimated Beam Sensors
- Metal-sheet Double-feed Detection
- Digital Panel Controller
- Other Products

HL-G1**HL-C2****HL-D3**

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS /
SAFETY COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONS

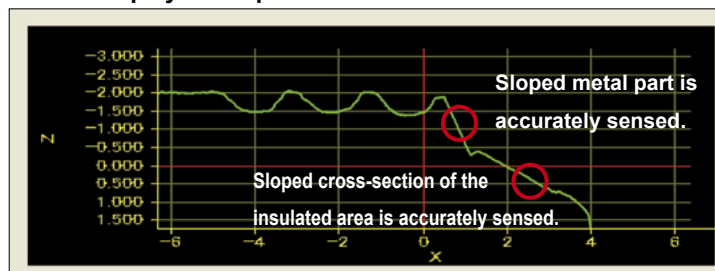
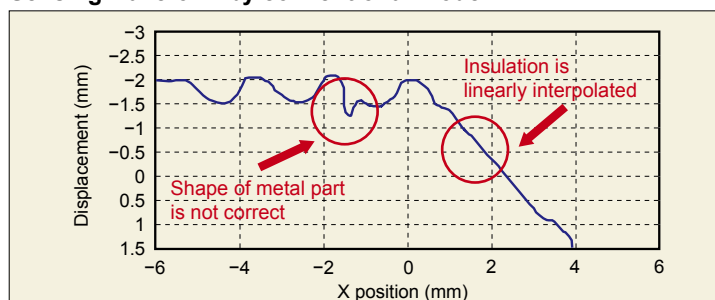
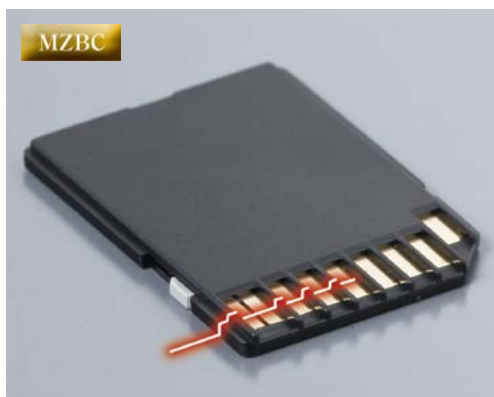
FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideLaser
DisplacementMagnetic
DisplacementContact
DisplacementCollimated
Beam SensorsMetal-sheet
Double-feed DetectionDigital Panel
Controller

Other Products

HL-G1**HL-C2****HL-D3****Multi-zone beam control function****Application Sensing objects with sloped profile**

HL-D3 can accurately sense the shapes of the thread and black insulation of a miniature bulb.

Screen display of shape waveform**Sensing waveform by conventional model****Application Sensing objects using both gold plates and black resin**

The terminal part of an SD card has gold-plated pads, as well as resin walls and dented parts that separate them. **HL-D3** can accurately sense the two materials having different reflectance.

Screen display of shape waveform**Close-up of sensed part**

Multi-zone beam control function**What is multi-zone beam control?****MZBC**

Conventional 2D displacement sensors uniformly use the same light intensity adjustment for the entirety of the measurement range of width (X axis). When parts with significantly differing reflectance exist, the received light intensity becomes saturated or insufficient, preventing the acquisition of effective measurement results. The **HL-D3** series breaks down the measurement range of width (X axis) into small segments and adjusts the emission for each segmented unit (called "light intensity adjustment unit") for optimal sensitivity in order to achieve stable, high-precision sensing.

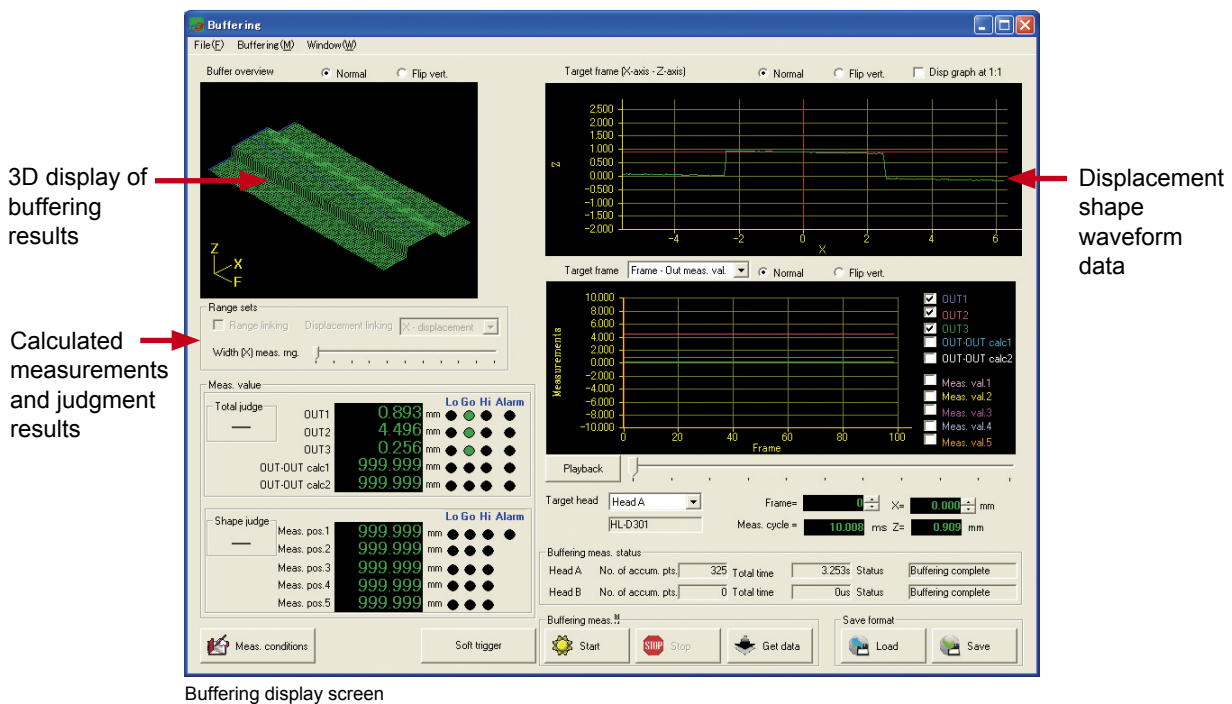
(MZBC: Multi-Zone Beam Control)

[Features]

- Stable sensing is possible even with objects of which reflectance is not consistent throughout the whole object
 - Both metal and resin parts exist
 - Profile consists of flat and sloped parts
- High-precision sensing
 - Resolution of 1 μm **0.039 mil** (average number of samples: 64 with average height measurement)
- Calculation and judgment results of width, step, and cross-sectional area can be output

HL-D3SMI (monitoring software) can**PART 2**

- Store displacement shape waveform data, calculated measured values, and judgment results on the memory built into the controller during continuous sensing.
- Provides a stereoscopic representation of the shape by a 3D display of stored data.
- Replay the stored data on the buffering screen at a later time, provided that the stored data is saved in the dedicated file format.
- Allow waveform display and analysis by means of spreadsheet software based on the data saved in CSV file format.

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS /
SAFETY COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONS

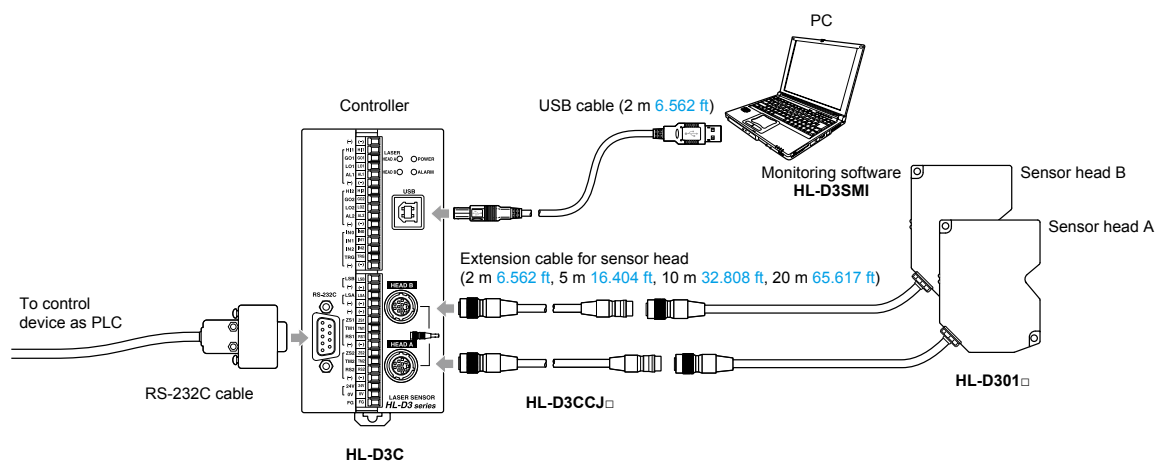
FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideLaser
DisplacementMagnetic
DisplacementContact
DisplacementCollimated
Beam SensorsMetal-sheet
Double-feed DetectionDigital Panel
Controller

Other Products

HL-G1**HL-C2****HL-D3**

SYSTEM CONFIGURATION



Set-up is performed based on the shape waveform obtained, which requires a computer pre-installed with the monitoring software (HL-D3SMI).

ORDER GUIDE

Sensor heads

Type	Appearance	Measurement center distance and height (Z axis) measurement range	Measurement range of width (X axis)	Resolution (height direction) (Note 1)	Laser class	Model No.
Diffuse reflection		50 ±10 mm 1.969 ±0.394 in	12.5 mm 0.492 in (with measurement center distance)	1 μm 0.039 mil	Class 2 [IEC / JIS / FDA (Note 2)]	HL-D301B
					Class 3R [IEC / JIS / FDA (Note 2)]	HL-D301C

Notes: 1) Value is the height mean value over the entire measurement range with the average number of samples being 64 and using measurement center distance.
2) This product complies with 21 CFR 1040.10 and 1040.11 Laser Notice No. 50, dated June 24, 2007, issued by CDRH (Center for Devices and Radiological Health) under the FDA (Food and Drug Administration).

Controller

Appearance	Model No.	Output
	HL-D3C	N-channel FET, open drain (Judgment output, Alarm output)

Options

Designation	Appearance	Model No.	Description	
Sensor head extension cable		HL-D3CCJ2	Length: 2 m 6.562 ft	Cabyre cable with connector on both ends Cable outer diameter: ø6.6 mm ø0.260 in Connector outer diameter: ø14.7 mm ø0.579 in max.
		HL-D3CCJ5	Length: 5 m 16.404 ft	
		HL-D3CCJ10	Length: 10 m 32.808 ft	
		HL-D3CCJ20	Length: 20 m 65.617 ft	

SPECIFICATIONS

Sensor heads

Type		Diffuse reflection type	
Item	Model No.	HL-D301B	HL-D301C
CE marking directive compliance		EMC Directive, RoHS Directive	
Measurement center distance		50 mm 1.969 in	
Height (Z axis) measurement range		±10 mm 0.394 in	
Measurement range of width (X axis)	Near side	11.5 mm 0.453 in	
	Measurement center	12.5 mm 0.492 in	
	Far side	12.5 mm 0.492 in	
Unit of measurement output	Height (Z axis)	0.1 μm 0.004 mil	
	Width (X axis)	1 μm 0.039 mil (Note 2)	
Resolution	Height (Z axis)	1 μm 0.039 mil (Note 3)	
	Width(X axis)	5 μm 0.197 mil (Note 2, 4)	
Linearity (Note 5)		±0.1 % F.S.	
Temperature characteristic		0.02 % F.S./°C	
Light source		Red semiconductor laser (Peak wavelength 658 nm 0.026 mil)	
	Output	Max. output: 1 mW	Max. output: 5 mW
	Laser class	Class 2 [IEC / JIS / FDA (Note 6)]	Class 3R [IEC / JIS / FDA (Note 6)]
Beam size (Note 7)		50 μm × 15 mm 1.969 mil × 0.591 in	
Receiving element		CMOS 2D image sensor	
Indicator	Laser emission	Green LED (lights up during laser emission)	
	Measurement range	Yellow LED [lights up when near the measurement center distance, blinks when within the measuring range, and lights out when outside of the measuring range. (at the measurement center position in the width direction)]	
Environmental resistance	Protection	IP67 (IEC) (excluding the connector)	
	Ambient temperature	0 to +45 °C +32 to +113 °F (No dew condensation allowed), Storage: -20 to +70 °C -4 to +158 °F	
	Ambient humidity	35 % to 85 % RH, Storage: 35 % to 85 % RH	
	Ambient illuminance	Incandescent light: 3,000 lx or less at the light-receiving face (No direct sunlight or its reflection allowed)	
	Vibration resistance	10 to 55 Hz (period: 1 min.) frequency, 1.5 mm 0.059 in double amplitude in X,Y and Z directions for two hours each	
	Shock resistance	196 m/s ² acceleration (20 G approx.) in X,Y and Z directions three times each	
Cable		Cable type cable, 0.5 m 1.640 ft long with connector	
Cable extension		Extension up to total 20 m 65.617 ft is possible, with optional cable.	
Materials		Enclosure: Die-cast aluminum, Case cover: Die-cast aluminum, Front cover: Glass	
Weight		500 g approx. (including cable)	
Accessory		Laser warning label: 1 set	

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were as follows: (connected to the controller) supply voltage 24 V DC, ambient temperature +20 °C +68 °F, MZBC mode (adjustment unit: width of 100 μm 3.937 mil), unit light receiving time 100 μs, average number of samples 64, measurement center distance, and target object is a white, light-diffusing object.

2) It is a value in which the sensor heads connected to a controller Ver. 2.00 or higher.

3) The value is the average of height measurement in full width at the measurement center distance.

4) This is the measurement value of a pin gauge rounded surface in the edge position measurement (start of falling edge) calculation setting. The measurement object: white ceramic pin gauge (ø10 mm ø0.394 in), unit light receiving time: 200 μs, measurement value extraction: base light intensity control, average number of samples: 64, width smoothing: ±4, all others are the initial settings.

5) Value represents the error in comparison with the ideal line of height measuring range (full scale) for the height measurement of the measurement center position in the width direction. The value in the specifications is the value within ±7.5 mm 0.295 in of the height measuring range.

6) This product complies with 21 CFR 1040.10 and 1040.11 Laser Notice No. 50, dated June 24, 2007, issued by CDRH (Center for Devices and Radiological Health) under the FDA (Food and Drug Administration).

7) This size applies when using measurement center distance and is defined as 1/e² (13.5 % approx.) of the center light intensity. Leaked light occurs outside of the defined range; sensing performance may be affected when the reflectance around the detection point is higher than that detection point.

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideLaser
DisplacementMagnetic
DisplacementContact
DisplacementCollimated
Beam
SensorsMetal-sheet
Double-feed
DetectionDigital Panel
ControllerOther
Products

HL-G1

HL-C2

HL-D3

SPECIFICATIONS

Controller

Model No.		HL-D3C
Item		
Applicable sensor heads		HL-D301B, HL-D301C
Connectable sensor heads		Number of connectable units: Max. 2 units
Supply voltage		24 V DC $\pm 10\%$ including ripple 0.5 V (P-P)
Current consumption		1 A or less (when 2 sensor heads are connected)
Sampling rate		Depends on the sensing mode and settings Multi-zone beam control mode : Standard 12.2 ms (Note 2) Whole synchronized measurement mode : Max. 2.5 ms (Note 3) Multi-select displacement sensing mode : Max. 80 μ s (Note 4)
Judgment output		N-channel FET, open drain • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output terminal and 0 V) • ON-resistance: 5 Ω or less
Output operation		Open during output operation (switchable)
Short-circuit protection		Incorporated
Alarm output		N-channel FET, open drain • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output terminal and 0 V) • ON-resistance: 5 Ω or less
Output operation		Open when alarm is triggered (switchable)
Short-circuit protection		Incorporated
External trigger input		Photocoupler insulation input
Input operation		ON: short-circuiting to external insulation COM (-) , OFF: when open
Applied voltage		30 V DC or less (leakage current: 0.1 mA or less)
Laser control input		Photocoupler insulation input
Input operation		Laser emission: short-circuiting to external insulation COM (-) , Laser emission OFF: when open
Applied voltage		30 V DC or less (leakage current: 0.1 mA or less)
Zero set input		Photocoupler insulation input
Input operation		ON: short-circuiting to external insulation COM (-) , OFF: when open
Applied voltage		30 V DC or less (leakage current: 0.1 mA or less)
Timing input		Photocoupler insulation input
Input operation		ON: short-circuiting to external insulation COM (-) , OFF: when open
Applied voltage		30 V DC or less (leakage current: 0.1 mA or less)
Reset input		Photocoupler insulation input
Input operation		ON: short-circuiting to external insulation COM (-) , OFF: when open
Applied voltage		30 V DC or less (leakage current: 0.1 mA or less)
RS-232C interface		Baud rate: 9,600, 19,200, 38,400, 57,600, 115,200 bit/s (Note 5)
USB interface		USB 2.0 full-speed (USB 1.1 compatible)
Settings / Data display		HL-D3SMI (accessory) or dedicated API
Indicator	Power	Green LED (lights up at power on)
	Sensor head A Laser radiation	Green LED [During continuous sensing: lights up during laser emission, blinks twice when turning off During sensing stop process: alternately lights up during laser emission (ON: 1 sec. / OFF: 1 sec.), blinks once when turning off]
	Sensor head B Laser radiation	Green LED [During continuous sensing: lights up during laser emission, blinks twice when turning off During sensing stop process: alternately lights up during laser emission (ON: 1 sec. / OFF: 1 sec.), blinks once when turning off]
	Alarm	Red LED (lights up when there is a sensing alarm or sensor head wire breakage)

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Laser Displacement

Magnetic Displacement

Contact Displacement

Collimated Beam Sensors

Metal-sheet Double-feed Detection

Digital Panel Controller

Other Products

HL-G1



HL-C2

HL-D3

SPECIFICATIONS**Controller**

Model No.		HL-D3C
Item		
Environmental resistance	Ambient temperature	0 to +50 °C +32 to +122 °F (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F
	Ambient humidity	35 to 85 % RH , Storage: 35 to 85 % RH
	Vibration resistance	10 to 55 Hz frequency (period: 1 min) , 0.75 mm 0.030 in double amplitude in X, Y, and Z directions for 30 min. each
	Shock resistance	196 m/s ² acceleration (20G approx.) in X, Y, and Z directions three times each
Material		Enclosure: Aluminum
Weight		300 g approx.
Accessories		HL-D3 set-up CD-ROM, (including HL-D3SMI and User's Manual), Instruction manual, USB cable (2 m 6.562 ft)

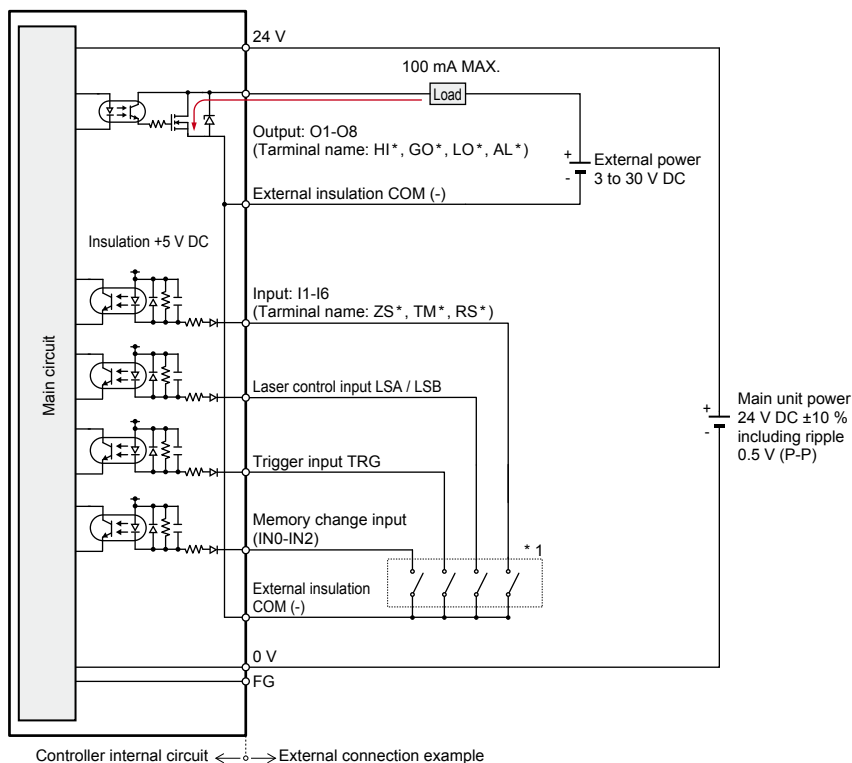- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were as follows: (connected to the sensor head) supply voltage 24 V DC, ambient temperature +20 °C **+68 °F**, MZBC mode (adjustment unit: width of 100 µm **3.937 mil**), unit light receiving time 100 µs, average number of samples 64, measurement center distance, and target object is a white, light-diffusing object.
- 2) Value for using two judgment outputs with 1 sensor head in MZBC mode, with each measuring range set to Max. and light intensity not adjusted (continuous sensing).
- 3) Value for obtaining displacement shape waveform data using buffering and 2 sensor heads in whole synchronized measurement mode, with each measuring range set to Min. (no OUT calculation).
- 4) Value for using 2 judgment outputs with 1 sensor head in MSDS mode, with the unit light receiving time set to 40 µs, light intensity not adjusted (continuous), and 2 points selected (without wide cell function).
- 5) Products produced from September 2013 (Ver. 2) are also compatible with 9,600, 19,200 and 38,400 bit/s.

I/O CIRCUIT DIAGRAMS

Note: External insulation COM (-) is insulated from internal 0 V. Always connect to an external power supply of 0 V.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MINI SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Laser Displacement

Magnetic Displacement

Contact Displacement

Collimated Beam Sensors

Metal-sheet Double-feed Detection

Digital Panel Controller

Other Products

HL-G1**HL-C2****HL-D3**

PRECAUTIONS FOR PROPER USE

Refer to p.1595 for general precautions and p.1593~ for information about laser beam.

- This catalog has been prepared to aid selection of appropriate products. When using the product, be sure to read the User's Manual.




- Never use this product as a sensing device for personnel protection.
- This product is intended to detect the objects and does not have the control function to ensure safety such as accident prevention.
- When using sensing devices for personnel protection, use products that meet the laws and standards for personnel protection that apply in each region or country, such as OSHA, ANSI and IEC.



- Do not operate products using methods other than those described in the instruction manual included with each product. Control or adjustment through procedures other than those specified may cause hazardous laser radiation exposure.
- The following labels are attached to the products. Handle each product according to the instruction given on the warning label.

HL-D301B

- This product is classified as a Class 2 Laser Product in IEC / JIS standards and FDA* regulations. Do not look at the laser beam directly or through optical devices such as a lens.

**HL-D301C**

- This product is classified as a Class 3R Laser Product in IEC / JIS standards and FDA* regulations. Never directly look at or touch the laser beam or its reflection.



* This product complies with 21 CFR 1040.10 and 1040.11 Laser Notice No. 50, dated June 24, 2007, issued by CDRH (Center for Devices and Radiological Health) under the FDA (Food and Drug Administration).

Safety standards for laser beam products

- A laser beam can harm human being's eyes, skin, etc., because of its high energy density. IEC has classified laser products according to the degree of hazard and the stipulated safety requirements. (Refer to p.1593~ for information about laser beam.)

Safe use of laser products

- For the purpose of preventing users from suffering injuries by laser products, IEC 60825-1 (Safety of laser products). Please check the standards before use. (Refer to p.1593~ for information about laser beam.)


Combining new and old versions

- Combined operation of new and old versions of sensor heads and controllers are as follows.


		Sensor head	
		Ver. 1.10	Ver. 2.00
Controller	Ver. 1.20	Operation	Controller operates as Ver. 1.20 (New features are unavailable.)
	Ver. 2.01	Cannot use (Note) (alarm output, always ON)	Operation

Note: While the controller may seem to be usable, the controller cannot be used as operations for existing functions are unavailable.

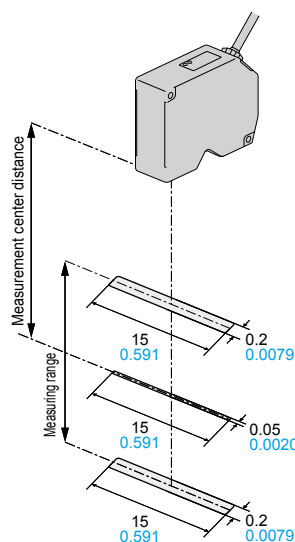* Products produced from September 2013 have been upgraded to Ver. 2.

Beam size (Unit: mm in)**HL-D301B, HL-D301C****Mutual interference** (Unit: mm in)

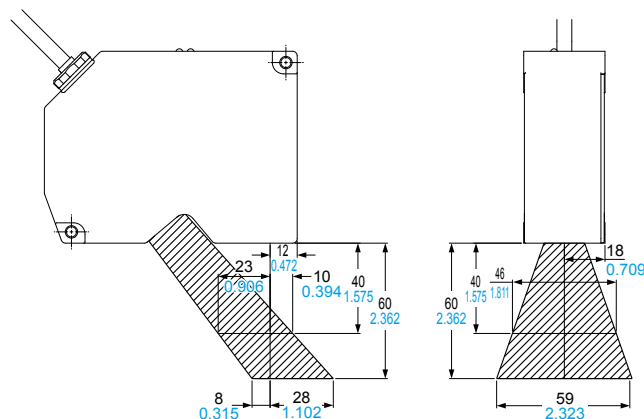- When installing two or more sensor heads side by side, mutual interference will not occur if the laser spots from other sensor heads do not fall within the shaded areas of the sensor head in the figure below.


HL-D301B, HL-D301C

DIMENSIONS (Unit: mm in)

The CAD data can be download from our website.


HL-D301B HL-D301C

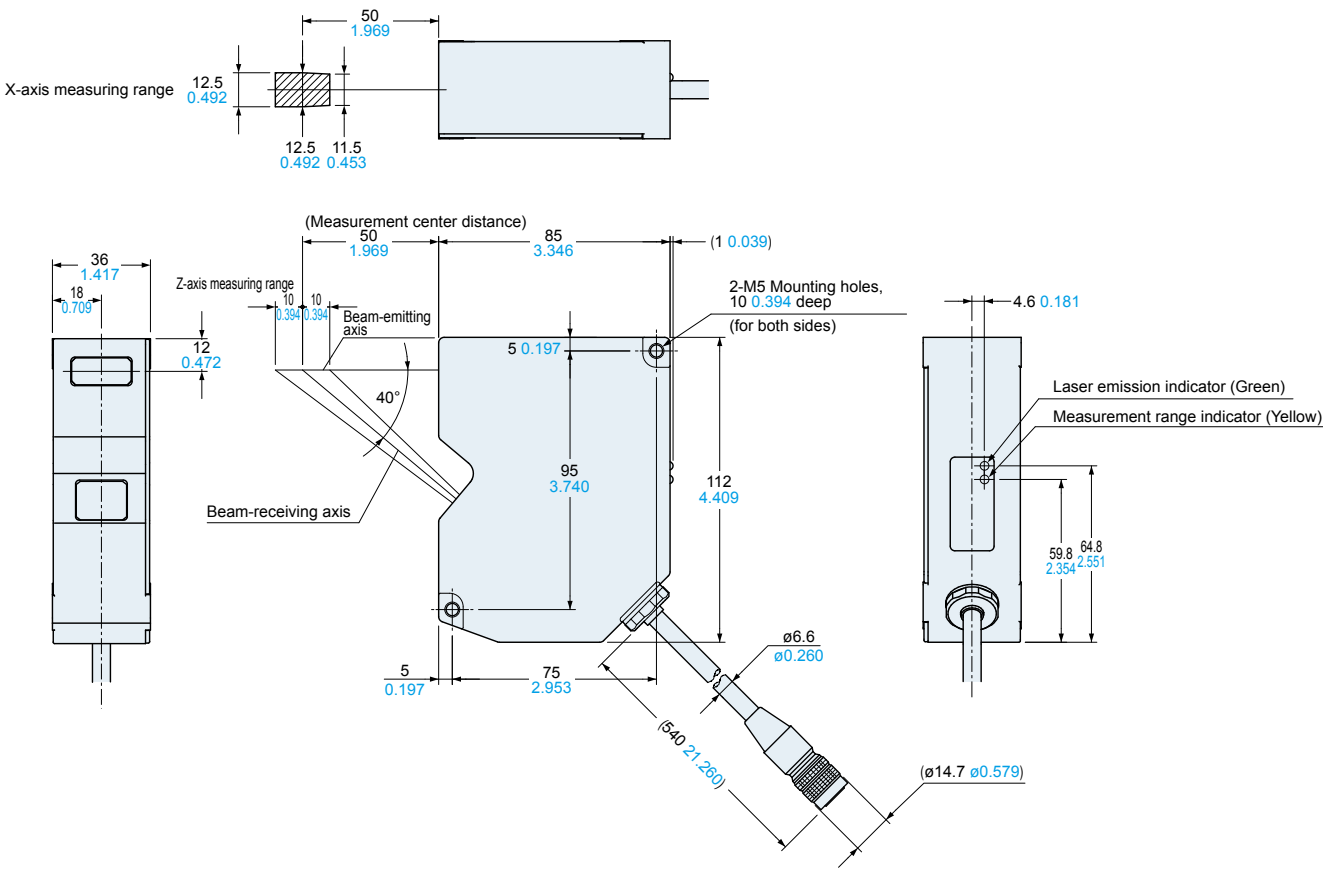Sensor head



HL-D3C

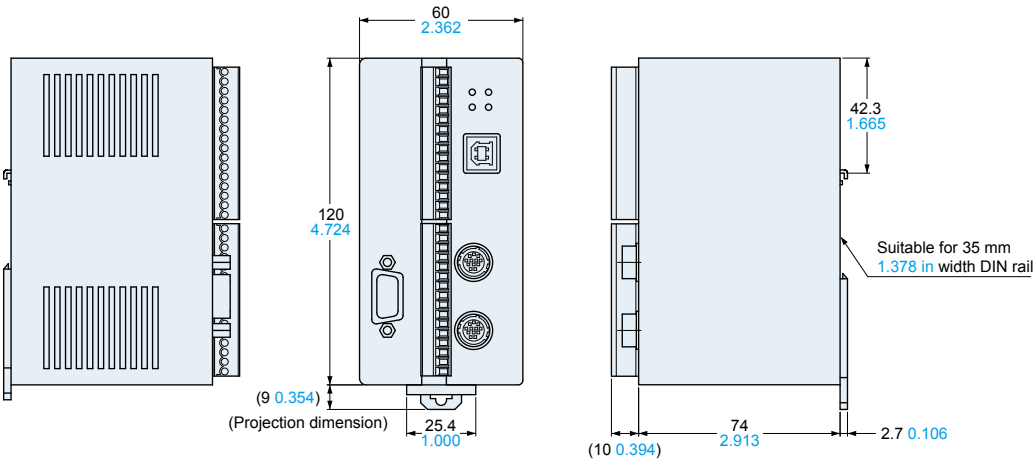Controller



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MINI SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Laser Displacement

Magnetic Displacement

Contact Displacement

Collimated Beam Sensors

Metal-sheet Double-feed Detection

Digital Panel Controller

Other Products

HL-G1

HL-C2

HL-D3