



- ACCOMMODATE UNIVERSAL AC SOURCES
- MEET IEC 61000-3-2 HARMONIC CORRECTION
- DUAL CONVERTER ARCHITECTURE
- MEET UNIVERSAL SAFETY STANDARDS
- 19" COMPATIBLE EUROCARD FORMAT
- EMI MEET EN 55022 & FCC CLASS B
- CE MARKING COMPLIANCE
- 6U X 12HP X 160MM FOR STANDARD VMEbus



OUTPUT VOLTAGE / CURRENT RATINGS CHART


TRIPLE OUTPUT

MODEL NO.	MAIN VO1 ★@#		MAIN VO2 @★■		AUX. VO3 ■	
	Typ.	Volt.	Typ.	Volt.	Typ.	Volt.
HPU300-T050IE (HPU300-30)	40.0A	+5.0V	5.0A	+12.0V	5.0A	-5.0V
HPU300-T050II (HPU300-32)	40.0A	+5.0V	5.0A	+12.0V	5.0A	-12.0V
HPU300-T050KK	40.0A	+5.0V	5.0A	+15.0V	5.0A	-15.0V
HPU300-T050DE	40.0A	+5.0V	5.0A	+3.3V	5.0A	-5.0V
HPU300-T033EE	40.0A	+3.3V	5.0A	+5.0V	5.0A	-5.0V
HPU300-T033KK	40.0A	+3.3V	5.0A	+15.0V	5.0A	-15.0V
HPU300-T033II	40.0A	+3.3V	5.0A	+12.0V	5.0A	-12.0V

Symbol: "★"OV P built-in. "@Adjustable. "#" Remote sensing. "■" Couple filter inductor.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 2,367g (5.22 lb.)

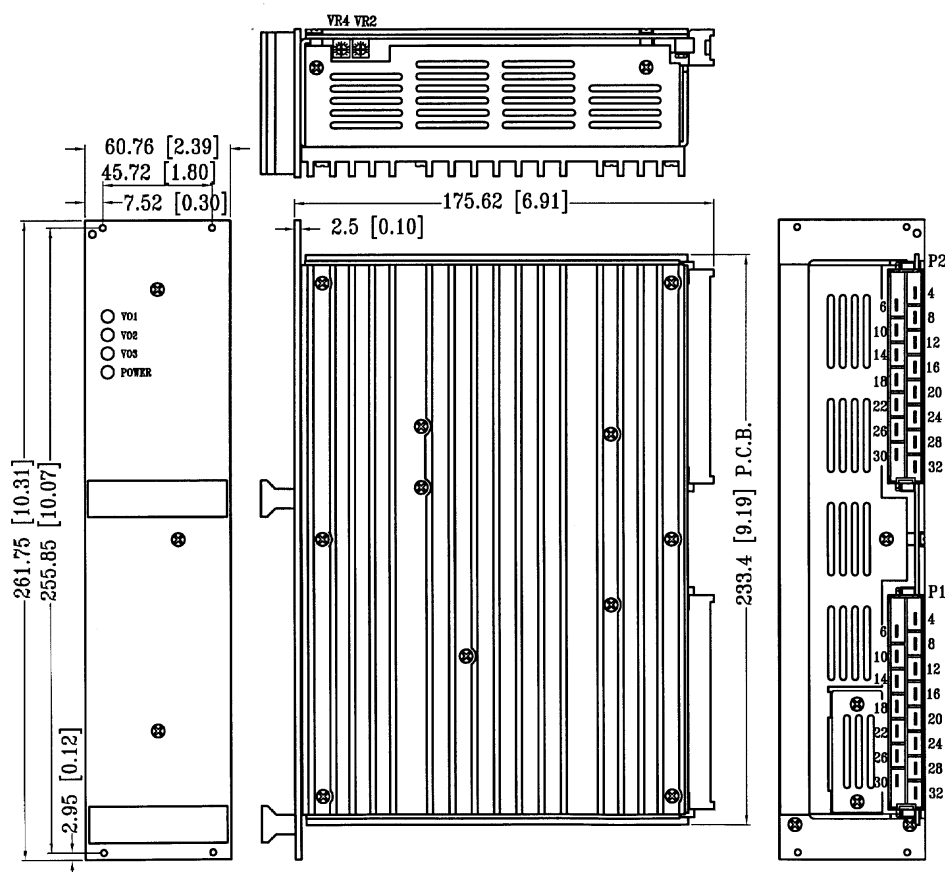

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENTS

	AC INPUT			ASSORTED SIGNAL			TRIPLE OUTPUT					
ASSIGNMENT	L	N	G	Inh.	Pwr.OK	Reset	VO1	+S	-S	+VO2	-VO3	DC COM
CONNECTOR & PIN#	P1-28	P1-30	P1-32	P1-8	P1-4	P1-6	P2-4,6,8,10,12	P2-14	P2-32	P2-28,30	P2-16	P2-18,20,22,24,26

Mating connector: DIN 41612-H15 Female.