



Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/05	
A		REVISED SPEC.	10/23/12	
B		REDRAWN	3/19/13	

APPROVED: _____
DATE: _____ TITLE: _____

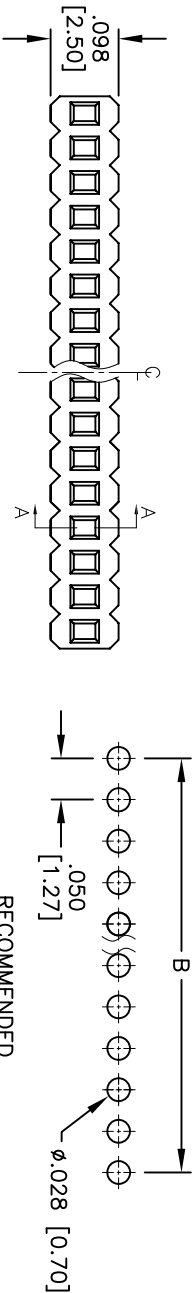

RECOMMENDED
PCB LAYOUT

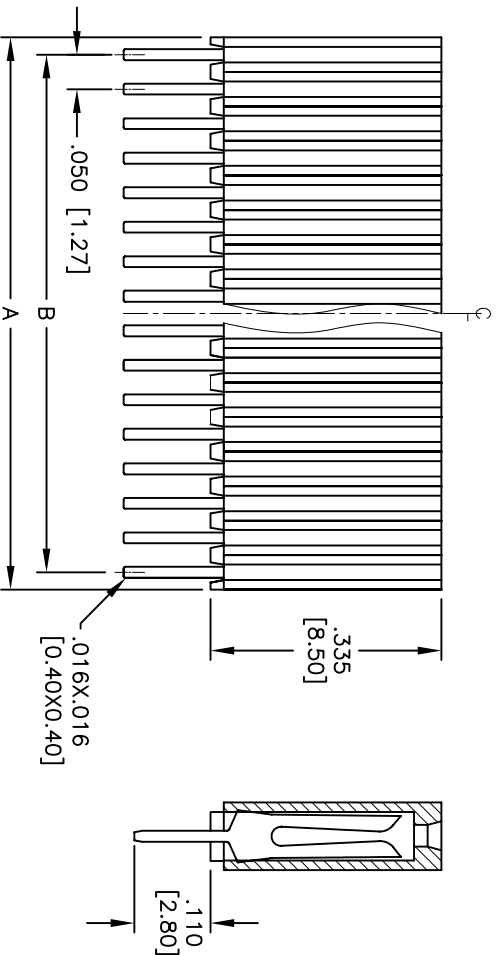

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: 02 thru 50
A = .050 [1.27] x No. of Positions
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	± .10	ØXX	± .10	.XX	± .020
.XX	± .020	ØXXX	± .015	.XXX	± .015
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	SS	5/25/05			
CHECKED					
APPROVED					
TITLE		SIZE		PART NO.	
.050 [1.27] SINGLE ROW RECEPTACLE STRIP		X		HRS-1A-XX-GA	
STANDARD PROFILE, GOLD PLATED		REF: S00019C		SCALE: NTS	
				SHEET 1 OF 1	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710



Lead free, RoHS compliant