CRYSTAL CLOCK OSCILLATORS

Data Sheet 0012T

Rev. H



CMOS
HS-1450 Series

Description

The **HS-1450 Series** of quartz crystal oscillators provide enable/disable 3-state CMOS compatible signals for bus connected systems. Supplying Pin 1 of the HS-1450 units with a logic "1" or open enables its pin 8 output. In the disabled mode, pin 8 presents a high impedance to the load. All units are designed to survive wave soldering operations without damage.

Features

- Wide frequency range– 4.0MHz to 40.0MHz
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 3000g
- All metal, resistance weld, hermetically sealed package
- Low Jitter
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- Low power consumption
- Gold plated leads - Solder dipped leads available upon request
- TTL compatible (HCT) at specified supply voltage
- RoHS Compliant, Lead Free Construction (unless solder dipped leads are supplied)
- COTS/Dual use

Electrical Connection

Pin	Connection
1	Enable Input
7	Grd & Case
8	Output
14	V_{DD}

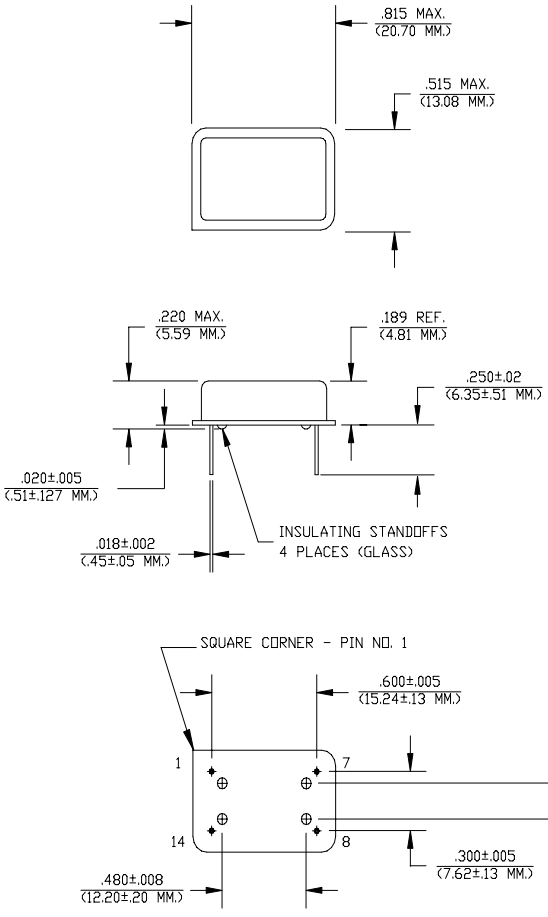

Dimensions are in inches and (MM)

NEL FREQUENCY CONTROLS, INC.

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881
Email: nelsales@nelfc.com www.nelfc.com

HS-1450 Series Continued
CMOS

Rev. H

Operating Conditions and Output Characteristics

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	-----	-----	4.0MHz	-----	40.0MHz
Duty Cycle	-----	@ V_{DD} /2	45/55%	-----	55/45%
Logic 0	V_{OL}	@ 600µA	-----	-----	0.2V
Logic 1	V_{OH}	@ 600µA	V_{DD}-0.2V	-----	-----
Rise & Fall Time	tr,tf	10-90%	-----	-----	3 ns
Tpz	-----	-----	-----	-----	25 ns
Jitter, RMS(2)	-----	-----	-----	-----	8 psec
Frequency Stability (1)	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	-----	+100ppm

General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V_{DD}	-----	4.75V	5.0V	5.25V
Supply Current	I_{DD}	No Load	0.0 mA	-----	30mA
Output current	I_O	-----	0.0 mA	-----	±16.0 mA
Operating temperature	T_A	-----	0°C	-----	70°C
Storage temperature	T_S	-----	-55°C	-----	125°C
Power Dissipation	P_D	-----	-----	-----	158 mW
Lead temperature	T_L	Soldering, 10 sec.	-----	-----	300°C
Load	----	-----	-----	-----	15pf
Start-up time	t_S	-----	-----	2 ms	10 ms

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Soldering Condition	300°C for 10 seconds
Hermetic Seal	Leak rate less than 1 x 10^{-8} atm.cc/sec of helium

Footnotes:
1) Standard frequency stability (±20,±25,±50ppm & others available)
2) Jitter performance is frequency dependent. Please contact factory for full characterization. RMS jitter bandwidth of 12kHz to 20MHz.

Creating a Part Number

HS - A145X - FREQ

Package Code
HS Leaded 4 pin (14 pin)
SM Leaded 4 pin (14 pin) SMD Gull Wing

Input Voltage
Code Specification
A 3.3V
5V

Tolerance/Performance
0 ±100ppm 0-70°C
1 ±50ppm 0-70°C
7 ±25ppm 0-70°C
9 Customer Specific
A ±20ppm 0-70°C
B ±50ppm -40 to +85°C
C ±100ppm -40 to +85°C

Test Load:

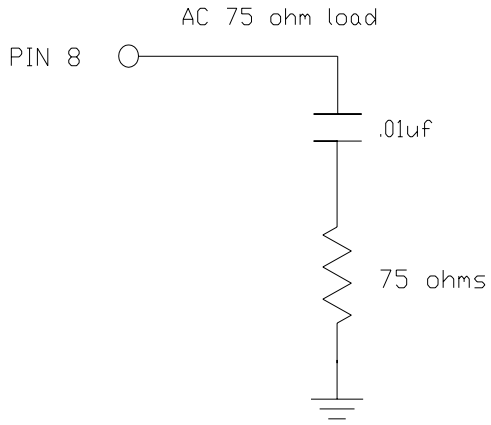

NEL FREQUENCY CONTROLS, INC.
357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881
Email: nelsales@nelfc.com www.nelfc.com