

HSMF-C145


Side View SMT ChipLED

Data Sheet



Caution: This LED is class 1A ESD sensitive. Please observe appropriate precautions during handling and processing.

Package Dimensions

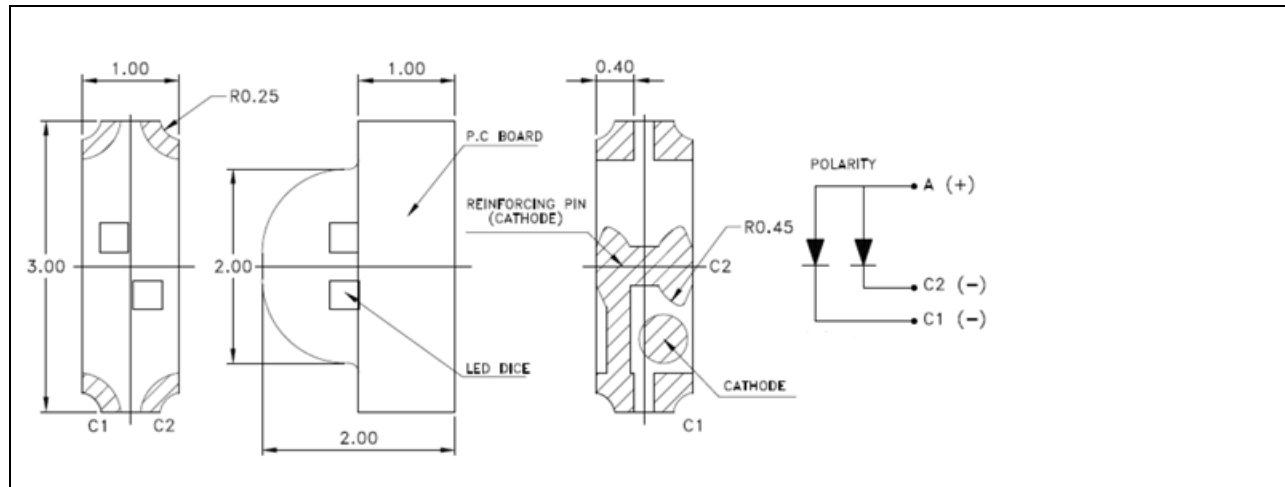

- All dimensions are in mm.
- Tolerance $\pm 0.1\text{mm}$ unless otherwise specified.

Device Selection Guide

Part Number	Color	Package
HSMF-C145	AlInGaP Red (C1) / InGaP Green (C2)	Water Clear


Absolute Maximum Value at $T_A = 25^\circ\text{C}$

Parameter	AlInGaP	InGaP	Unit
Forward current	30	20	mA
Power dissipation	72	78	mW
Operating temperature	-30 to 85		$^\circ\text{C}$
Storage temperature	-40 to 85		$^\circ\text{C}$
Reverse voltage	Not recommended		V


Optical/Electrical Characteristics at T_A = 25°C, I_f=20mA

Color	Luminous intensity(mcd)		Dominant wavelength(nm)	Peak wavelength(nm)	Viewing angle(°)	Forward voltage(V)	
	Min	Typ	Typ	Typ	Typ	Min	Max
InGaN Green	45	223	523	517	120	2.9	3.9
AlInGaP Red	18	79	632	644	120	1.6	2.4


- Forward voltage tolerance is ±0.1V.

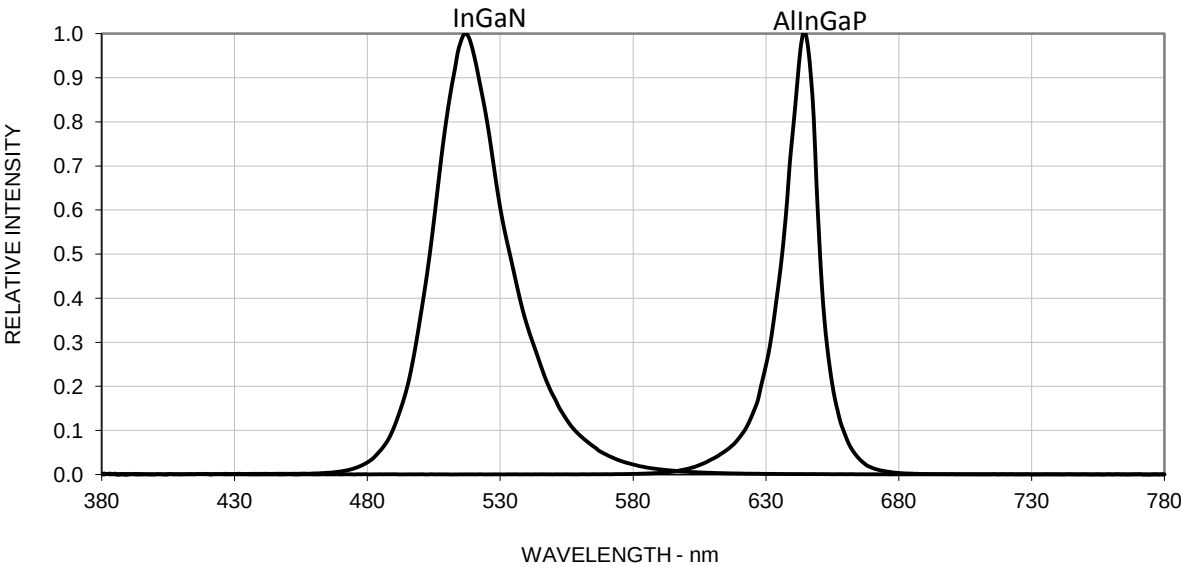


Relative intensity vs Wavelength

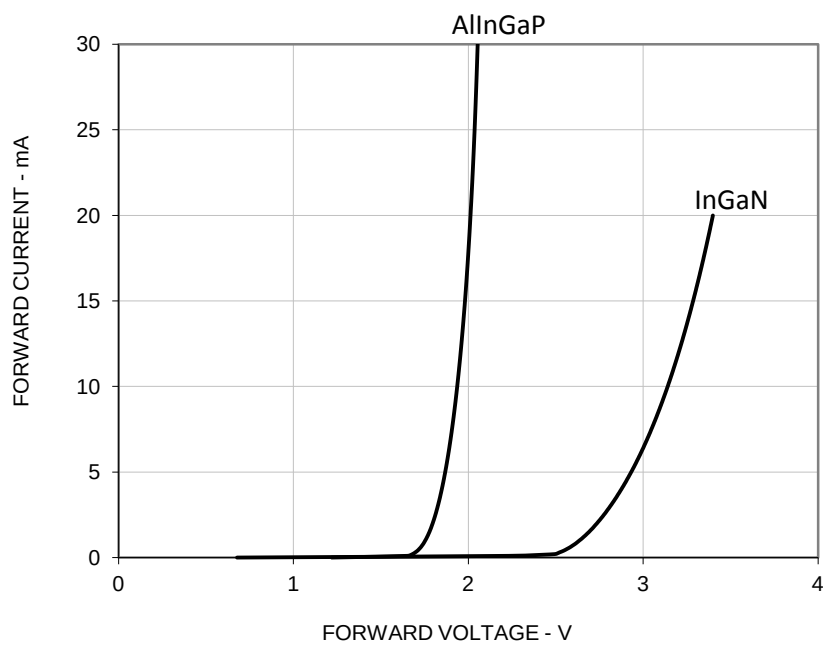


Forward current vs Forward voltage

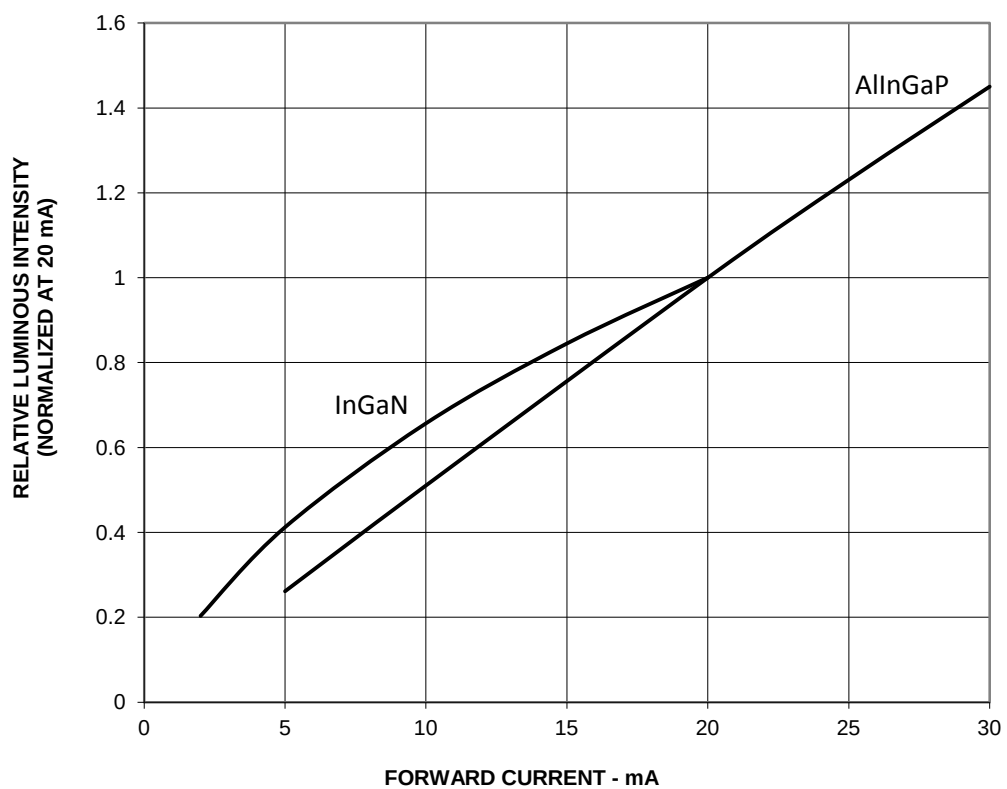


Relative intensity vs Forward current

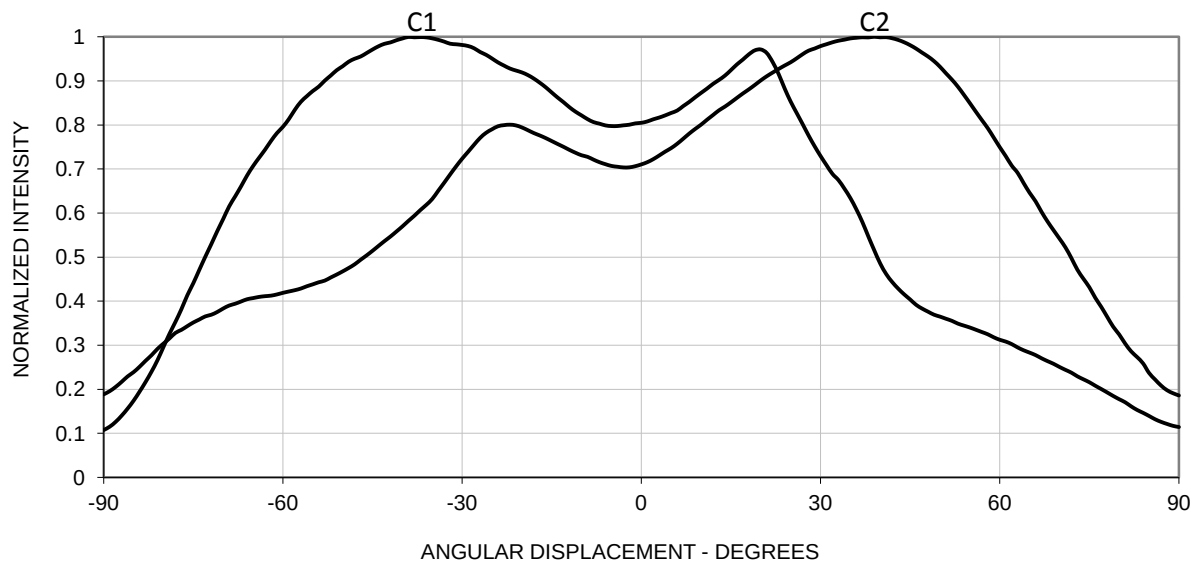


Relative intensity vs Angle

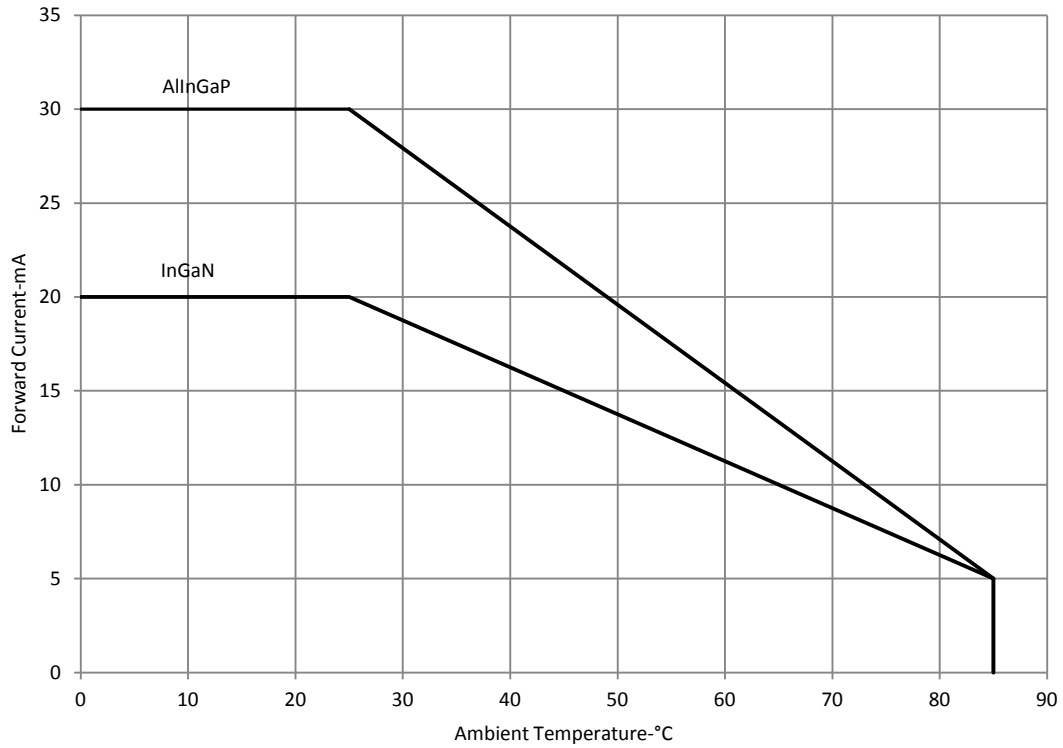



Maximum forward current vs Ambient temperature

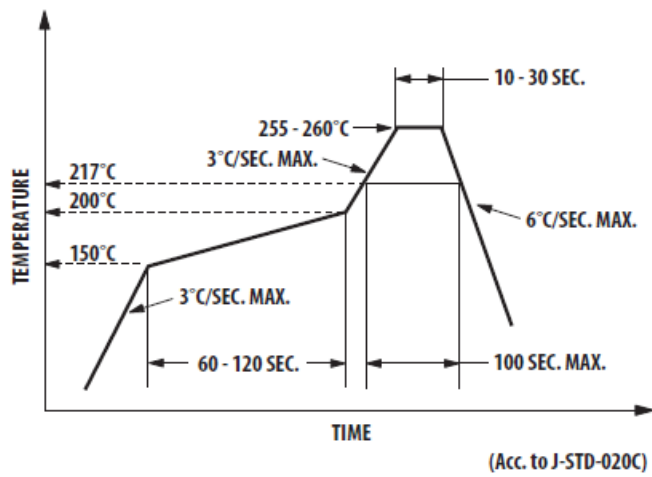

Recommended Pb free reflow solder profile

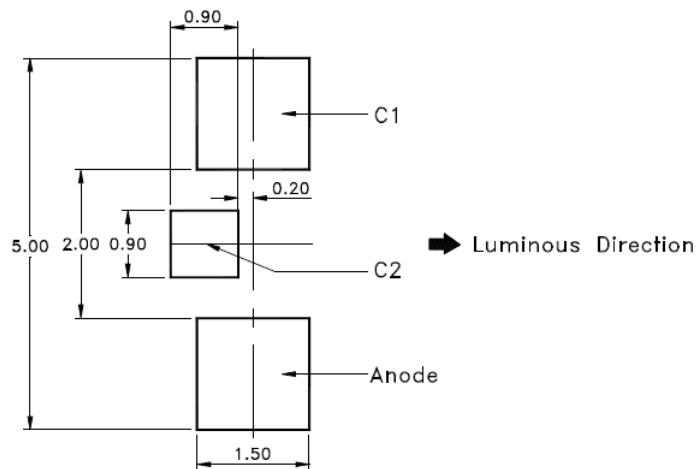

Recommended soldering pad pattern
Unit:mm



Baking recommended condition: $60 \pm 5^\circ\text{C}$ for 20 hours.

Luminous Intensity Bin

Bin	Min (mcd)	Max (mcd)
M	18.0	28.5
N	28.5	45.0
P	45.0	71.5
Q	71.5	112.5
R	112.5	180.0

Tolerance for each bin limit is $\pm 15\%$

InGaN Green Color Bin

Bin	Min (nm)	Max (nm)
A	515.0	520.0
B	520.0	525.0
C	525.0	530.0
D	530.0	535.0

Tolerance for each bin limit is $\pm 0.5\text{nm}$

AlInGaP Red Color Bin

Bin	Min (nm)	Max (nm)
-	620	635

Tolerance for each bin limit is $\pm 1\text{nm}$

DISCLAIMER

AVAGO'S PRODUCTS AND SOFTWARE ARE NOT SPECIFICALLY DESIGNED, MANUFACTURED OR AUTHORIZED FOR SALE AS PARTS, COMPONENTS OR ASSEMBLIES FOR THE PLANNING, CONSTRUCTION, MAINTENANCE OR DIRECT OPERATION OF A NUCLEAR FACILITY OR FOR USE IN MEDICAL DEVICES OR APPLICATIONS. CUSTOMER IS SOLELY RESPONSIBLE, AND WAIVES ALL RIGHTS TO MAKE CLAIMS AGAINST AVAGO OR ITS SUPPLIERS, FOR ALL LOSS, DAMAGE, EXPENSE OR LIABILITY IN CONNECTION WITH SUCH USE.